

Heating

Hydronic heat pumps

















Hybrid systems





VRF HWS & ATW Heating/Cooling/Domestic hot water	212
ECODAN MULTI - SPLIT - AIR/WATER - AIR/AIR	
Heating/Cooling/Domestic hot water	222

Packaged systems

HWHP - CAHV - PACKAGED - AIR/WATER SYSTEM	
Heating/Domestic Hot Water	224
HWHP - CRHV - PACKAGED - WATER/WATER SYSTEM	
Heating/Domestic Hot Water	230



			Capacity				
			Heating kW	Cooling kW			
					Domestic hot water	Hot water heating	
Hybrid systems							
 MULTI	PUMY-P		12.5 12.5 12.5	12.5 14.0 15.5			
HWS	VRF HWS (Hot Water Supply)		12.5	-			
ATW	VRF ATW (Air To Water)		12.5	11.2			
Packaged systems							
CAHV	HWHP (Hot Water Heat Pump)		45.0	-			
CRHV	HWHP (Hot Water Heat Pump)		60.0	-			

Supply				Functions		Applications and solutions
					Cascade systems automatic control	
	Water cooling	Air heating	Air cooling	Heat recovery		

						AUTONOMOUS SOLUTIONS <ul style="list-style-type: none"> • Residential (villas, apartments) • Offices • Shops/Bars SPA/GYMS
						CENTRALIZED SOLUTIONS <ul style="list-style-type: none"> • Residential (villas, apartments) • Offices • Hotel
						INDUSTRY SHOPPING CENTER SPA/GYM

						CENTRALIZED SOLUTIONS <ul style="list-style-type: none"> • Residential (condos) • Offices • Hotel
						INDUSTRY SHOPPING CENTER SPA/GYM

VRF HWS & ATW

HYBRID SYSTEM - Heating/Cooling/Domestic hot water



CITY MULTI



WATER HEATING



DOMESTIC HOT WATER



ENERGY RECOVERY



AIR COOLING



AIR HEATING

The scalability, flexibility and modularity of the Ecodan® – VRF HWS & ATW system represents the state of the art in Mitsubishi Electric technology. This solution makes it possible to use a single producer – the VRF outdoor unit – to deliver heating water, cooling water and domestic hot water simultaneously.

Hydronic modules for VRF CITY MULTI systems.

Ecodan® heat pump technology has been used in conjunction with hydronic modules to create systems for the production of domestic hot water (HWS) and heating water for radiator panels (ATW) which are perfectly compatible with the inclusion of both thermal and photovoltaic solar panels in the installation. Systems with electric heat pumps may be used all year round, as their use is not restricted by legislation.

The added comfort of being able to use the air conditioning system in spring and autumn is yet another advantage of these VRF systems. The indoor units of the VRF CITY MULTI system gently cool and dehumidify the interior space in spring, cool and dehumidify in summer, transferring the extracted heat to both the HWS and ATW hydronic modules, and heat the interior gently at cooler times of day in autumns.

HWS hydronic modules are ideal for the production of domestic hot water all year round. They make use of the energy drawn from indoor spaces by the VRF indoor units, as well as supplementary energy provided by solar panels in summer and spring.

ATW hydronic modules provide hot water for radiant panel heating in winter and deliver warm water to heat a pool in summer, contributing to maintaining comfortable temperature conditions and making use of the energy drawn from the indoor space by the VRF indoor units supplemented by heat supplied by thermal solar panels.

In systems with this capability, ATW hydronic modules may also be used to deliver refrigerated water to radiant panels in summer.

TYPICAL APPLICATIONS: HOTEL (ROOMS)



TYPICAL APPLICATIONS: CENTRALIZED RESIDENTIAL SYSTEMS



SOLUTION FOR CLIMATIZATION, HEATING AND DOMESTIC HOT WATER PRODUCTION



- 1 R2 Outdoor Units
- 2 Photovoltaic solar panels
- 3 BC controller
- 4 HWS Hydronic Module
- 5 ATW Hydronic Module
- 6 Domestic hot water accumulator tank fed from HWS
- 7 Hot water inertial accumulator tank fed by ATW

— GREEN REFRIGERANT CIRCUIT
 — RED DOMESTIC HOT WATER CIRCUIT
 — ORANGE HEATING HOT WATER CIRCUIT
 — BLACK POWER CIRCUIT


HWS hydronic module – Hot water supply

Mitsubishi Electric was the first to introduce VRF systems for the production of high temperature hot water (up to 70°C), usable for domestic hot water production. The HWS hydronic module represents a significant, innovative technological breakthrough that uses the most advanced refrigeration technology, and has been conceived to be easily integrable with R2/WR2 series VRF CITY MULTI simultaneous cooling / heating systems.

Heat recovery plays a crucial role in these systems, as the HWS hydronic module may be used to extract heat from rooms where cooling is

required, which would otherwise be vented into the outdoor atmosphere, and then use this heat to contribute to hot water production, adding only the supplementary heat necessary to reach the desired temperature. The HWS hydronic module can produce hot water at temperatures up to 70°C in the return line, with a heating capacity of up to 12.5 kW per module which, however, is scalable in relation to internal demand.

HWS HYDRONIC MODULE – HOT WATER SUPPLY

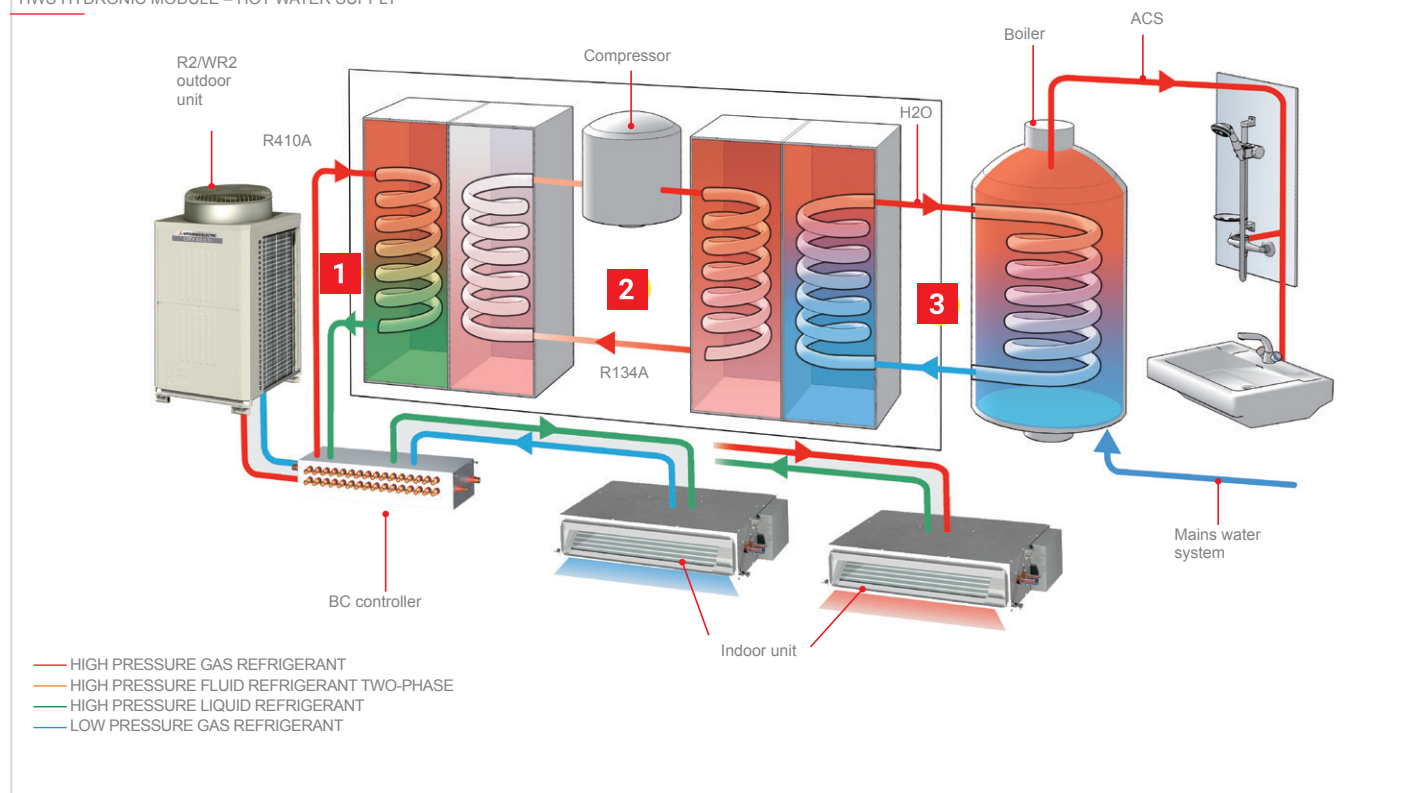

Operating principle of two-stage technology

The HWS hydronic module employs a variant of the two-stage compression principle – a principle that has been known and used for many years, but which, until now, has only been applied in refrigeration systems to reach very low temperatures (as low as -60°C). Mitsubishi Electric has redesigned the two-stage circuit to achieve the opposite effect, for units intended to produce heating power at medium to high temperatures, from 30°C to 70°C. This solution combines superior energy efficiency with high hot water temperatures that are not attainable with the conventional heat pumps currently on the market. As illustrated previously, the HWS hydronic module uses the “free” heat extracted from the air conditioned interior by the heat recovery circuit of the CITY MULTI R2 outdoor units and raises the temperature to the desired value to deliver usable hot water. This double process recovers energy from the system, increasing its overall efficiency, and raises the temperature of the water with minimal energy expenditure.

Advantages of two-stage technology

The two-stage technology employed in the HWS hydronic module offers a number of significant advantages:

- R134a refrigerant in high temperature stage. R134a is a pure HFC refrigerant which is harmless for the stratospheric ozone layer and contributes only marginally to the greenhouse effect. This refrigerant is particularly suitable for high temperature applications.
- R410A refrigerant in low temperature stage. This is also an HFC refrigerant that is harmless to stratospheric ozone, which offers extraordinary efficiency in air conditioning applications.
- Minimal external energy demand, even when the system is operating in air conditioning mode. The heat drawn from the air is used to heat water.
- When the system functions predominantly in air conditioning mode – in summer, for example – hot water is produced with extremely low energy consumption. This makes it possible for the system to attain very high COP values.
- Continuously variable heating power in relation to demand, made possible by the inverter motor scroll compressor, which reduces energy consumption proportionally.
- Compact dimensions and very light weight. These modules may be mounted on walls, even in intermediate positions. Practically zero floor space usage.
- Individual thermal energy consumption billing with field devices.

Hybrid systems



The HWS hydronic module may be used to create hybrid systems, with both hydronic modules and VRF direct expansion units. For instance, this makes it possible for the system to produce domestic hot water and heat or cool the air in the indoor space using the most suitable indoor units of the Mitsubishi Electric range (cassette units, ceiling-suspended units, ducted units etc.).

As well as superior energy efficiency, a hybrid system also offers the extraordinary flexibility needed to cater for very diverse situations, which a conventional air conditioner system simply does not.

Control and adjustment system

The HWS hydronic module can be configured for the following operating modes and hot water temperatures:

OPERATING MODE	TEMPERATURE RANGE
Hot water	30 - 70°C
Heating	30 - 50°C
ECO heating	30 - 45°C
Antifreeze	10 - 45°C

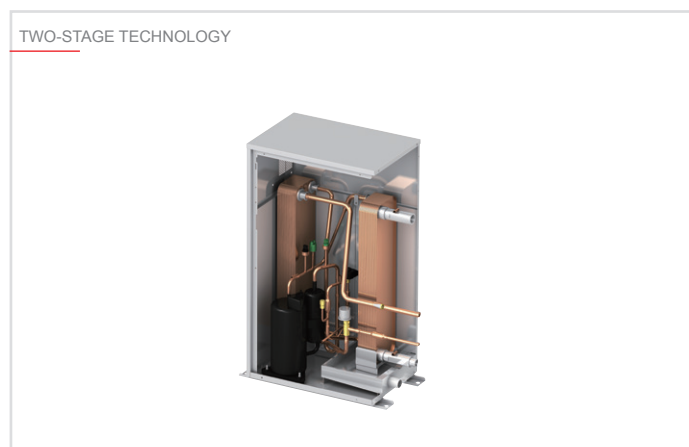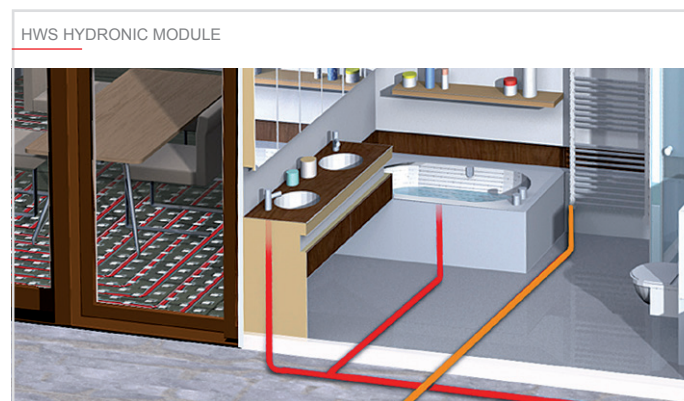



Technical specifications HWS HYDRONIC MODULE

MODEL			PWFY-P100VM-E-BU
Power			Single-phase, 220-230-240V, 50 Hz/60Hz
Heating power output (nominal)		kW *1	12,5
		kcal/h *1	10,800
		Btu/h *1	42,700
	Power absorption	kW	2,48
	Current consumption	A	11,63 - 11,12 - 10,66
Temp. range in heating mode	PURY Series	Outdoor temp. DB	-20~32°C
	PQRY Series	Water temp. in circuit	10~45°C
	PQRY Series	Temp. in water/glycol circuit (for geothermal applications)	-5~45°C
	PWFY-P VM-E1-BU	Return line water temp.	10~70°C
Connectable outdoor units	Total capacity		50-100% of external unit capacity
	Series		R2 (E)P, WR2
Sound pressure in anechoic chamber	dB <A>		44
Refrigerant circuit piping diameter	Liquid	mm (inches)	ø 9,52 (ø 3/8") brazed
	Gas	mm (inches)	ø 15,88 (ø 5/8") brazed
Water piping diameter	Inlet	mm (inches)	ø 19,05 (R 3/4") screw-on connection
	Delivery	mm (inches)	ø 19,05 (R 3/4") screw-on connection
Drain pipe diameter		mm (inches)	ø 32 (1-1/4")
External finish			Galvanised sheet steel
External dimensions HxLxW		mm	800 (785 without feet) x 450 x 300
Dry weight		kg	60
Compressor	Type		Hermetic scroll compressor with inverter
	Manufacturer		MITSUBISHI ELECTRIC CORPORATION
	Starter method		Inverter
	Power	kW	1
	Lubricant		NEO22
Water in circuit	Nominal	m³/h	0,6 - 2,15
	(entire operating volume)		
Internal circuit protection (R134a)	Overpressure protection		Overpressure sensor, pressure switch calibrated to 3.60 Mpa (601 psi)
	Inverter circuit (COMP)		Overcurrent protection, overheat protection
	Compressor		Outlet temperature protection, overheat protection
Refrigerant	Type / original charge		R134a x1.1kg (0.50lb)
	Controller		LEV
Rated pressure	R410a	MPa	4,15
	R134A	MPa	3,60
	Water	MPa	1
Standard equipment	Manuals		Installation manual, Instruction manuals
	Accessory		Water filter, insulating material

Note:

* Nominal conditions *1 are subject to EN14511-2:2004(E)

* Install the module in an environment with a wet bulb temperature not exceeding 32°C

* Due to continuous improvements made to these products, the specifications given above are subject to modification without prior notification.

* The module is not designed to be installed outdoors.

*1 Nominal heating conditions Outdoor temp.: 7°C DB/6°C WB


Nominal heating conditions Outdoor temp.: 7°C DB/6°C WB (45°F DB/43°F WB)
Pipe Length 7.5 m (24-9/16 feet) – Vertical difference: 0 m (0 feet)

ATW hydronic module – Air to water

Mitsubishi Electric has developed the ATW reversible air-water heat pump hydronic module specifically for hydronic heating and air conditioning systems. The refrigeration side of the module may be connected to VRF CITY MULTI SMALL Y and Y Series outdoor heat pump units, or to R2 heat recovery units. The hydronic side of the module may feed heated underfloor systems or other similar utilities, to provide heating in winter in heat pump mode, or cooling in summer in conditioning mode.

Connecting these modules to R2 Series VRF CITY MULTI heat recovery outdoor units offers extraordinarily levels of efficiency, especially in spring and autumn, with extremely high COP values. The HWS hydronic module can produce hot water at temperatures up to 40°C in the return line (45°C in delivery line), with a heating capacity of up to 12.5 kW per module which, however, is scalable in relation to internal demand.

ATW HYDRONIC MODULE – AIR TO WATER

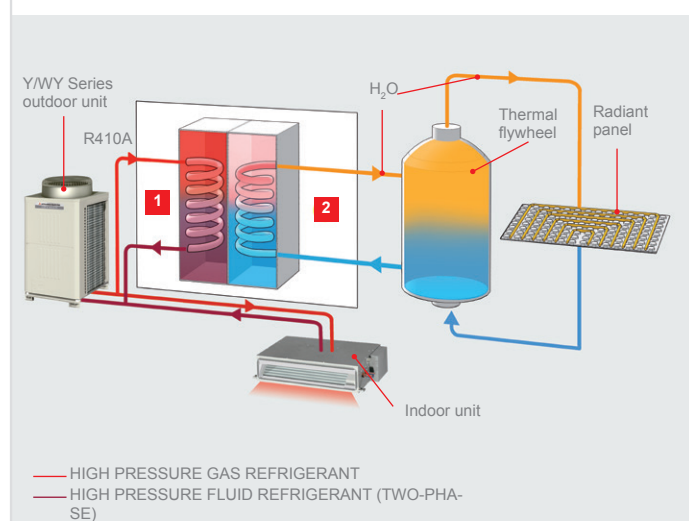

Hybrid systems

Like the HWS module, the ATW hydronic module may be used to create hybrid systems, with both hydronic modules and VRF direct expansion units. For instance, this makes it possible to create a system that can heat certain rooms with radiant panels (a heating solution that is now very popular, as it offers uniform temperatures and quietness) and heat other rooms using appropriate Mitsubishi Electric indoor units (cassette units, wall-mounted units, ducted units etc.). Similarly, conditioning in summer may be performed with a heated underfloor system in rooms where this is installed, and with cooled air in other rooms, via standard VRF indoor units.

This makes it possible to use the most effective treatment solution possible for each interior space, catering for both the requisites of the specific application and the preferences of the user. As well as superior energy efficiency, a hybrid system also offers the extraordinary flexibility needed to cater for very diverse situations, which a conventional conditioning system simply does not.

TYPICAL APPLICATIONS: HOTEL (COMMON AREAS)



TYPICAL APPLICATIONS: CENTRALIZED RESIDENTIAL SYSTEMS (RADIANT PANEL HEATING)




Main features

The functional characteristics of the ATW hydronic module cater for the needs of a very wide variety of different installations:

- nominal heating capacity: 12.5 kW;
- nominal cooling capacity: 11.2 kW;
- outdoor operating temperature range, heating mode: -20°C to +32°C (R2 heat recovery series); -20 to +15.5°C (Y heat pump series);
- outdoor operating temperature range, conditioning mode: -5°C to +46°C (R2 and Y series);
- return hot water temperature range: 10°C to 40°C;
- mains power: single-phase, 230V AC;
- individual thermal energy consumption billing with field devices.

Operating principle

The ATW reversible heat pump hydronic module consists essentially of a brazed plate stainless steel refrigerant-water heat exchanger connected to the VRF CITY MULTI outdoor unit on the refrigeration side, and to the hydronic circuit of the system (radiant panels, radiator units etc.) on the water side. The module is equipped with an electronic expansion valve which modulates the flow of refrigerant in the heat exchanger in response to heating or cooling demand and the demand required by the electronic management and control circuit. The entire system is encased in a housing with compact dimensions and very limited weight comparable to a wall-mounted boiler. The high COP value attained by the ATW hydronic module means that it delivers superior comfort with minimal operating costs, contributing to reducing the CO2 emissions produced for energy production at the power plant. This offers a two-sided advantage as emissions are not only reduced, but also delocalised away from populated areas.

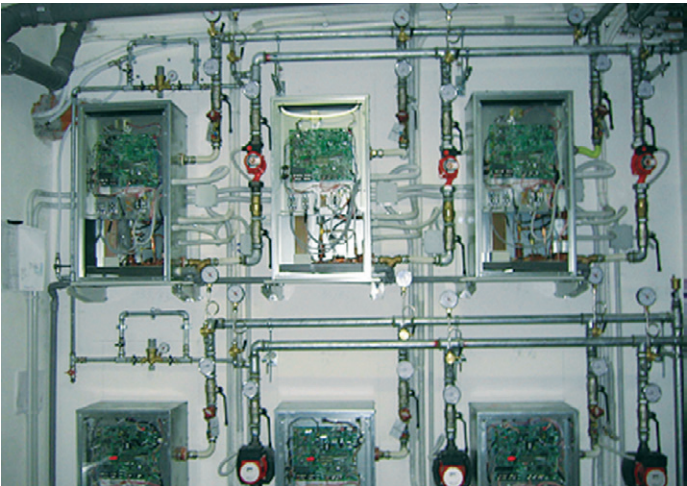

Control and adjustment system

Like the HWS module, the ATW hydronic module is equipped with a sophisticated control system offering a wide choice of functions, selectable in relation to the needs of the installation and the preferences of the user.

The ATW module may be associated with its own independent remote controller (PAR-W21MAA), allowing the user to configure all operating settings, including water temperature, which may be displayed either for the delivery circuit or for the return circuit.

The water temperature reading displayed depends on the type of installation and on the auxiliary controller devices used. The return circuit reading configuration is the most widely used of the two, and allows precise control over the water temperature in the inertial accumulator tank (which is recommended) as a means to balance flows. Once the set temperature is reached, the ATW continues to operate to maintain a constant value.

Note that with this configuration, the delivery temperature is normally higher (max. 45°C) than the set temperature until the set temperature itself is reached.

In installations operating in summer, the ATW produces cold water at a temperature regulated with the same method, based on the primary delivery circuit reading or the return circuit reading.

As the cooling action of the radiant panels only reduces the sensible heat of the interior space, suitable dehumidification systems may also be included in the installation.

The ATW hydronic module can be configured for the following operating modes and hot water temperatures:

MODE	TEMPERATURE RANGE
Heating	30 - 45°C
ECO heating	30 - 45°C
Antifreeze	10 - 45°C
Cooling	10 - 30°C



Technical specifications HWS HYDRONIC MODULE

MODEL			PWFY-EP100VM-E2-AU
Power			Single-phase, 220-230-240V 50/60Hz
Heating power output (nominal)		kW *1	12,5
		kcal/h *1	10,800
		Btu/h *1	42,700
	Power absorption	kW	0,025
	Current consumption	A	0,138
Temp. range in heating mode	Serie PUMY	Outdoor temp. DB	-
	Serie PUHY	Outdoor temp. DB	-20~15,5°C
	Serie PURY	Outdoor temp. DB	-20~32°C
	Serie PQHY - PQRY	Water temp. in circuit	10~45°C
	Serie PQHY - PQRY	Temp. in water/glycol circuit	-5~45°C
		(for geothermal applications)	
		Return line water temp	10~40°C
Cooling output (nominal)		kW *2	11,2
		kcal/h *2	9,600
		Btu/h *2	38,200
	Power absorption	kW	0,025
	Current consumption	A	0,138
Temp. range in cooling mode	PUMY Series	Outdoor temp. B.S.	-
	PUHY Series	Outdoor temp. B.S.	-5~46°C
	PURY Series	Outdoor temp. B.S.	-5~46°C
	PQHY - PQRY Series	Water temp. in circuit	10~45°C
	PQHY - PQRY Series	Temp. in water/glycol circuit	-5~45°C
		(for geothermal applications)	
		Return line water temp	10~35°C
Connectable outdoor units	Total capacity		50-100% of capacity of OU
	Series		Y (Ecostandard (P), Standard Efficiency (P), High Efficiency (EP)), Zubadan Y, WY, R2 (Standard Efficiency (P), High Efficiency (EP)), WR2
			29
			ø 9,52 (ø 3/8") brazed
Sound pressure in anechoic chamber	dB <A>		ø 15,88 (ø 5/8") brazed
Refrigerant circuit piping diameter	Liquid	mm (inches)	ø 19,05 (R 3/4") screw-on connection
	Gas	mm (inches)	ø 19,05 (R 3/4") screw-on connection
	Inlet	mm (inches)	ø 32 (1-1/4")
Water piping diameter	Delivery	mm (inches)	Galvanised sheet steel
		mm (inches)	800 (785 without feet) x 450 x 300
External finish			36
External dimensions HxLxW		mm	1,8-4,30
Dry weight		kg	
Water in circuit	Nominal	m³/h	4,15
	(entire operating volume)		1
Rated pressure	R410A	MPa	Installation manual, Instruction manuals
	Water	MPa	
Standard equipment	Manuals		Water filter, insulating material, 2x external signal connectors, plumbing fittings for filter, flow regulator
	Accessory		

Note:


- * Nominal conditions *1 and *2 are subject to EN14511-2:2004(E)
- * Install the module in an environment with a wet bulb temperature not exceeding 32°C
- * Due to continuous improvements made to these products, the specifications given above are subject to modification without prior notification.
- * The module is not designed to be installed outdoors.

*1 Nominal heating conditions
 Outdoor temp.: 7°C DB/6°C WB
 (45°F DB/43°F WB)
 Pipe length: 7.5 m (24-9/16 feet)
 Vertical difference: 0 m (0 feet)
 Intake water temp.: 30°C
 Water flow rate: 2.15 m³/h (P100)
 4.30 m³/h (P200)

*2 Nominal cooling conditions:
 External temp: 35°C DB/(95°F DB)
 Pipe length 7.5 m (24-9/16 feet)
 Vertical difference: 0 m (0 feet)
 Intake water temp.: 23°C
 Water flow rate: 1.93 m³/h (P100)
 3.86 m³/h (P200)



SCHEMATIC: ECODAN® VRF HWS & ATW (SIMULTANEOUS HEATING, COOLING AND DOMESTIC HOT WATER PRODUCTION)

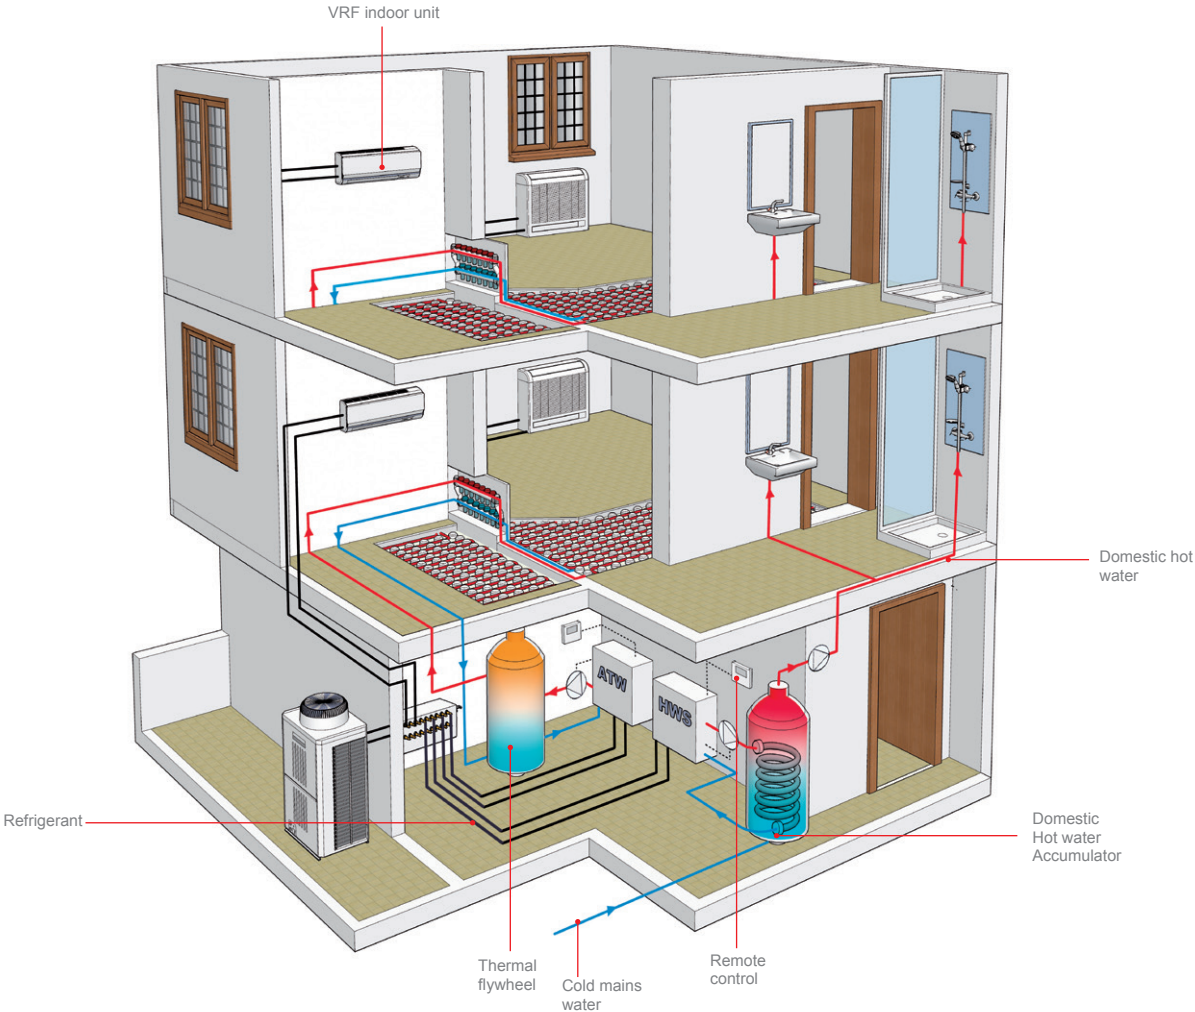


200% EXTENDED CONNECTIVITY FUNCTION




Y SERIES HEAT PUMP UNITS

With Y Series outdoor units, this function is only applicable in mixed installations and allows the connection of indoor units (air heating or cooling) and an Ecodan® ATW hydronic module (water heating) with a total capacity index up to 200% of the capacity of the outdoor unit.*

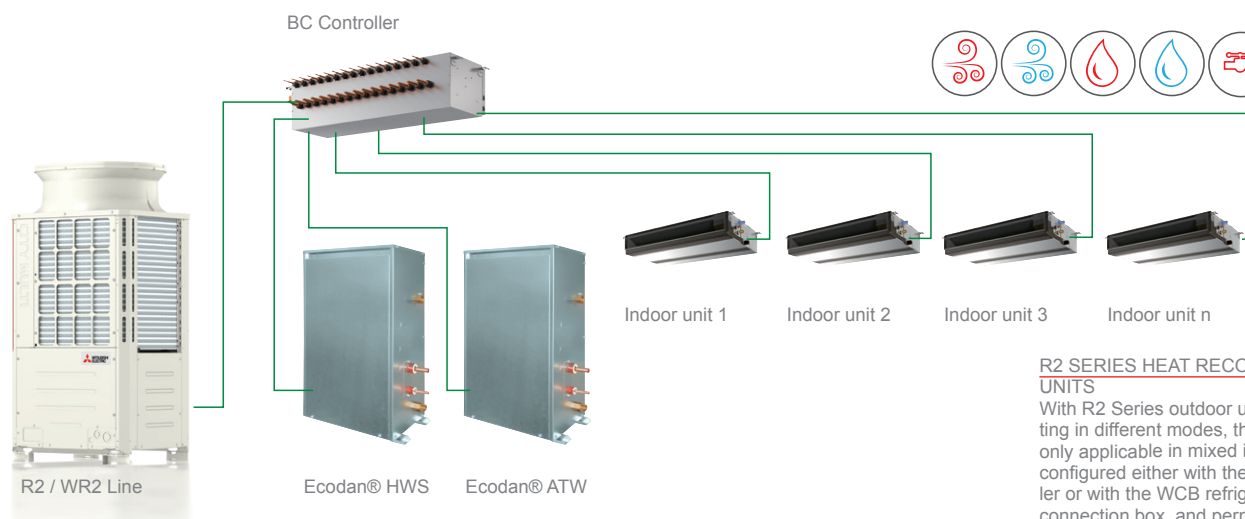

R2 SERIES HEAT RECOVERY UNITS

With R2 Series outdoor units operating in different modes, the function is only applicable in mixed installations configured either with the BC Controller or with the WCB refrigerant-water connection box, and permits the connection of indoor units (air heating and cooling) and Ecodan® HWS&ATW hydronic modules (DHW production and water heating) with a total capacity index up to 200% of the capacity of the outdoor unit.*

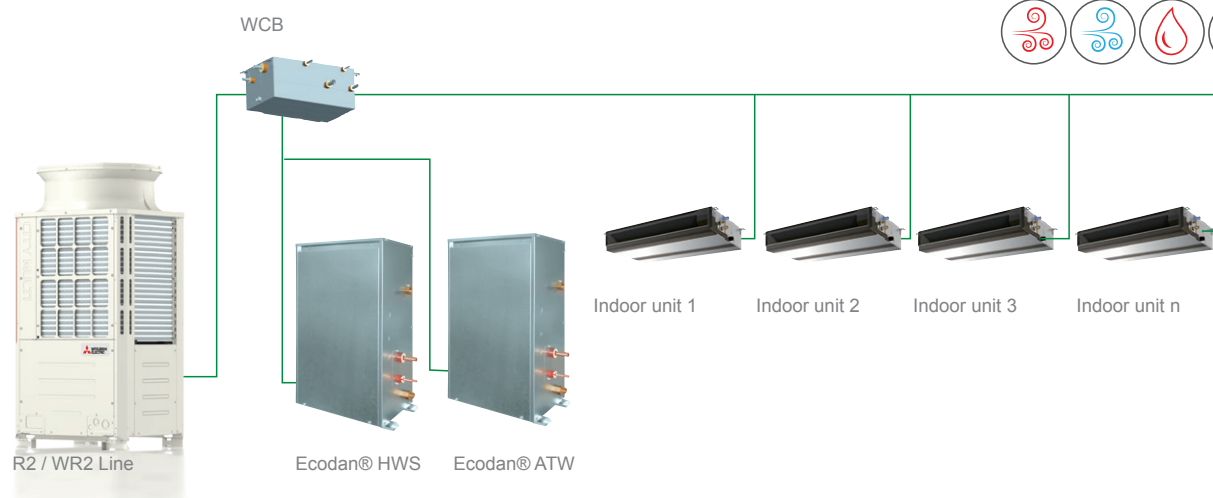

*For detailed informations, please contact your representative



ECODAN MULTI

SPLIT - AIR/WATER - AIR/AIR - Heating/Cooling/Domestic hot water



WATER HEATING



DOMESTIC HOT WATER



AIR COOLING












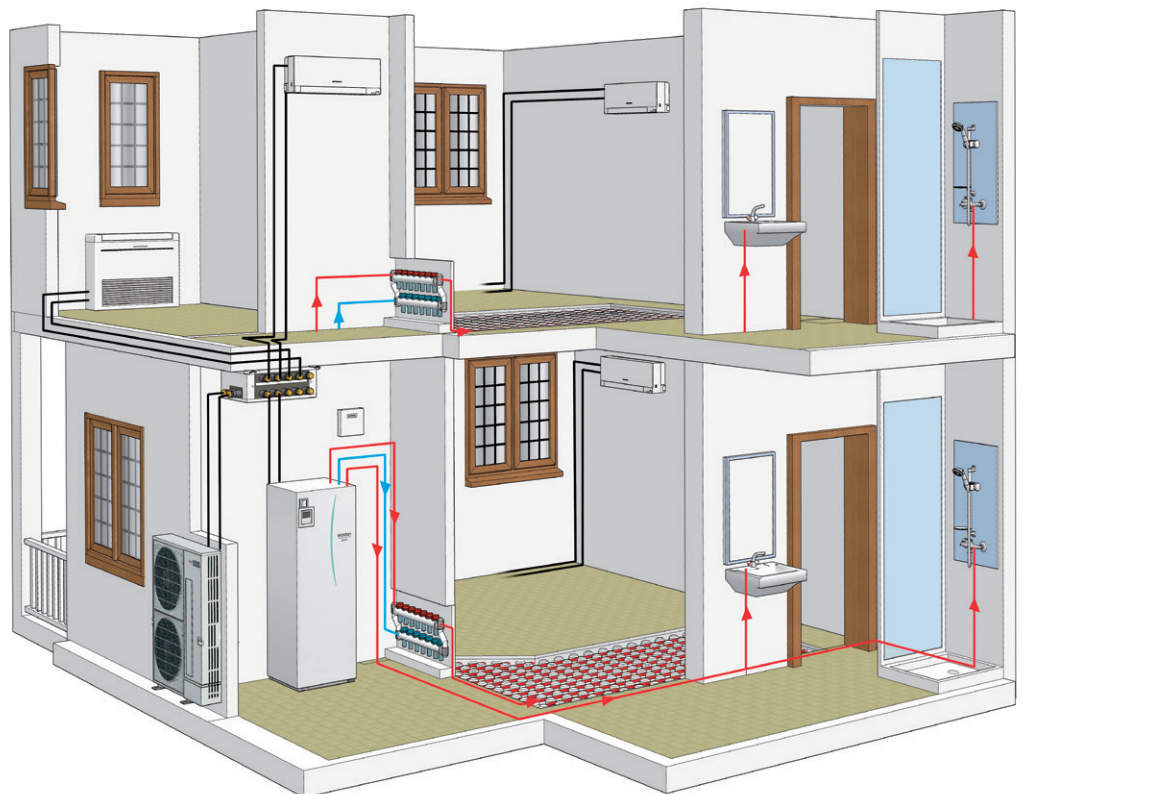






AIR HEATING

Ecodan® Multi is a hybrid Air/Air, Air/Water system that combines the flexibility of a multisplit system with the

convenience of a hydronic heat pump that can produce hot water for heating and domestic use.

SMALL Y LAYOUT WITH ECODAN



Indoor unit				Outdoor units
 EHSC	 EHST20C		 PAC-MK54BC PAC-MK34BC	 PUMY-P112VKM5 PUMY-P112YKM4 PUMY-P125VKM5 PUMY-P125YKM4 PUMY-P140VKM5 PUMY-P140YKM4
HYDROBOX	200-litre HYDROTANK	SERIES M/S/P/CITY MULTI	BRANCH BOX	SMALL Y
Key Technologies				
				
				
* Optional				

Technical specifications HEATING/COOLING/DOMESTIC HOT WATER

OUTDOOR UNIT				PUMY-P112VKM5 PUMY-P112YKM4	PUMY-P125VKM5 PUMY-P125YKM4	PUMY-P140VKM5 PUMY-P140YKM4
	Compatible hydronic modules	Size		MEDIUM		
		Hydrobox		EHSC-VM2D	EHSC-VM2D	EHSC-VM2D
		"hot only" model				
		200-litre hydrotank		EHST20C-VM2D	EHST20C-VM2D	EHST20C-VM2D
	Power Supply	Voltage/Freq./Phases	V/Hz/no.	230 / 50 / 1 400 / 50 / 3+N	230 / 50 / 1 400 / 50 / 3+N	230 / 50 / 1 400 / 50 / 3+N
Air/Air	Cooling	Nominal capacity	kW	12,5	14,0	15,5
		Absorbed power	kW	2,79	3,46	4,52
		EER		4,48	4,05	3,43
		Annual energy consumption	kWh	1395	1730	2260
	Heating	Nominal capacity	kW	14,0	16,0	18,0
		Absorbed power	kW	3,04	3,74	4,47
		COP		4,61	4,28	4,03
Air / Water Heating ¹	Air 7° / Water 35°	Nominal capacity	kW	12,5	12,5	12,5
		Absorbed power	kW	3,06	3,06	3,06
		COP		4,083	4,083	4,083
	Water temperature max.	RANK		A++	A++	A++
		SCOP		4,20	4,20	4,20
		ηs	%	168	168	168
	Low water temperature 35°C (Spring/Autumn)	RANK		A+	A+	A+
		SCOP		3,02	3,02	3,02
		ηs	%	121	121	121
	Medium water temperature 55°C (Spring/Autumn)	RANK (DHW load profile)		A (L)	A (L)	A (L)
		ηwh	%	106	106	106
		Production of DHW ²				
	Outdoor units	Magnetothermic switch recommended	A	32/16	32/16	32/16
		Dimensions HxWxD	mm	1338x1050x330(+25)	1338x1050x330(+25)	1338x1050x330(+25)
		Weight	Kg	122/125	122/125	122/125
		Sound pressure	dB(A)	49	50	51
	Refrigeration lines	Sound power max	dB(A)	69	70	71
		Diameters (gas/liquid)	mm	15,88/9,52	15,88/9,52	15,88/9,52
		Length max (min)	m	n.d.	n.d.	n.d.
		Respective height elevation max.	m	n.d.	n.d.	n.d.
Guaranteed operating range	Air/Air	Cooling	min/max	-5 / +46	-5 / +46	-5 / +46
		Heating	min/max	-20 / 21	-20 / 21	-20 / 21
Guaranteed operating range	Air/Water	Heating	min/max	-20 / 21	-20 / 21	-20 / 21
		DHW	min/max	-20 / 35	-20 / 35	-20 / 35
	Refrigerant	Type / Preload	Kg	R410A / 4,80	R410A / 4,80	R410A / 4,80
		GWP ³ / Tons CO ₂ Eq.		2088 / 10,02	2088 / 10,02	2088 / 10,02

¹ In combination with 'hot only' hydronic modules.

² In combination with 200-litre Ecodan Hydrotank.

³ In combination with the hydronic module only.

⁴ Reference notes see last page.

Table of indoor unit combinations

		Wall Mounted																Floor Standing		1 way cassette	4 way cassette				Ceiling Concealed				Ceiling Suspended																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
NO. OF CONNECTABLE UNITS	Min/max connectable capacity (kW) x 10	MODEL	Kirigamine Style		Kirigamine Zen										Plus line										60x60 (Compact)		90x90 (Standard)		Low static pressure		Middle static pressure																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
			MSZ-LN- VG(2)		MSZ-EF VG(K)/ VE2/3					MSZ-SF VE3					MSZ-AP VG(K)					MSZ- GF VE		MFZ-KJ VE (2)		MFZ-KT VG		MLZ-KP VF		SLZ-M FA		PLA-M-EA PLA-RP-EA		SEZ-M DA (L)		PEAD-M JA PEAD-RP JAQ		PCA-M KA PCA-RP KAAQ																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
			25	35	50	18	22	25	35	42	50	15	20	25	35	42	50	15	20	25	35	42	50	60	71	25	35	50	25	35	50	25	35	50	15	25	35	50	35	50	60	71	100	25	35	50	60	71	100	50	60	71	100	35	50	60	71	100																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
8	30/162	PUMY-P112	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

* [kW]x10, COMPATIBILITY TABLE FOR MODELS PUMY P VKM5; PUMY P112-140 Y(V) KM4 R1(2);

*1 ONLY MSZ-SF 15/20 VA

*2 ONLY MSZ-AP 15/20 VF

ONLY for R2 model : MSZ-LN-VG2 ; MSZ-EF-VGK ; MSZ-AP-VGK ; MFZ-KT-VG

HWHP - CAHV

PACKAGED - AIR/WATER SYSTEM - Heating/Domestic Hot Water



WATER HEATING



DOMESTIC HOT WATER

The Ecodan® - Packaged HWHP (Hot Water Heat Pump) system consists of an outdoor monoblock air condensing unit which produces very high volumes of high-temperature hot water.

Technology

COP
Over 4*

The flash-injection circuit designed for the VRF CITY MULTI ZUBADAN Y system (a heat pump system for very cold climates) is installed in the latest packaged Hot Water Heat Pump CAHV system. By using this advanced injection system and highly efficient compressors, the CAHV packaged system can deliver high-temperature hot water up to 70°C, and ensures fewer losses in terms of performance and capacity at very low outdoor temperatures.

Packaged AtW heat pumps for hot water


Mitsubishi Electric has been designing and manufacturing packaged heat pumps for hot water for the commercial sector since 1970.

The company was one of the first manufacturers in Japan to use heat pump technology to produce hot water, and was also the first to develop a range of solutions operating with R407C, which even then could produce high-temperature hot water up to 70°C, sufficient to instantly eliminate legionella bacteria.

Our products are still used today in industrial processes requiring high volumes of high-temperature water.

Our Hot Water Heat Pump systems are used in hotels, hospitals and care homes, testifying to their superior reliability.

As a leading manufacturer of domestic hot water production systems, we are proud to introduce the efficient Air to Water packaged heat pump system.

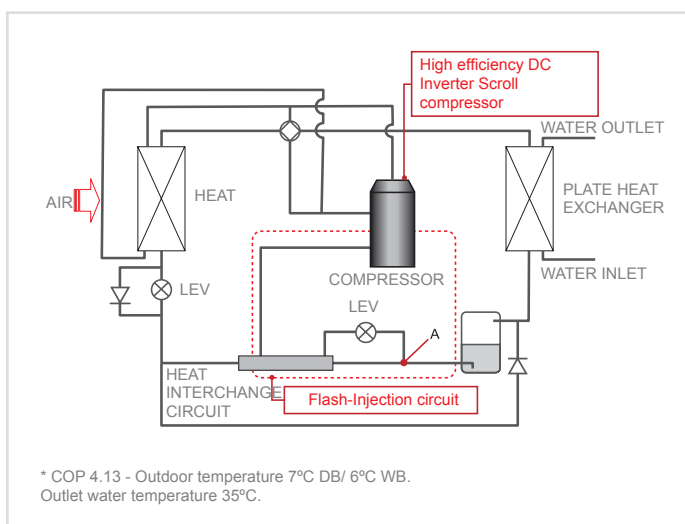

Class-beating heating capacity

MAX.
70kW
Over*

he CAHV packaged system offers unrivalled flexibility with 2 operating modes to cater for every possible need - Efficiency Mode (COP) and Capacity Mode. In Capacity Mode the system can deliver a maximum capacity that exceeds 70 kW, while Efficiency Mode (COP) is extremely effective for maximising energy efficiency in all operating conditions, and reducing CO2 emissions as a result.

* Outdoor temperature 20°C DB, Outlet water temperature 35°C. Relative humidity 85% in capacity mode.

Efficiency mode (COP)

Outlet water temperature 35°C.	Outdoor temperature °C DB	-20	-10	0	7	20
	Capacity kW	31.9	40.3	42.7	45.0	45.0


Capacity Mode

Outlet water temperature 35°C.	Outdoor temperature °C DB	-20	-10	0	7	20
	Capacity kW	31.9	40.3	42.7	63.4	73.9

Operation guaranteed at temperatures as low as -20 °C

Operable even at
-20°C

The CAHV packaged system is capable of operating at outdoor temperatures between -20°C and 40°C, producing high-temperature hot water (65°C) even on the coldest days of the year. In the defrost cycle, the two system compressors operate in turn, limiting the drop in delivery temperature.

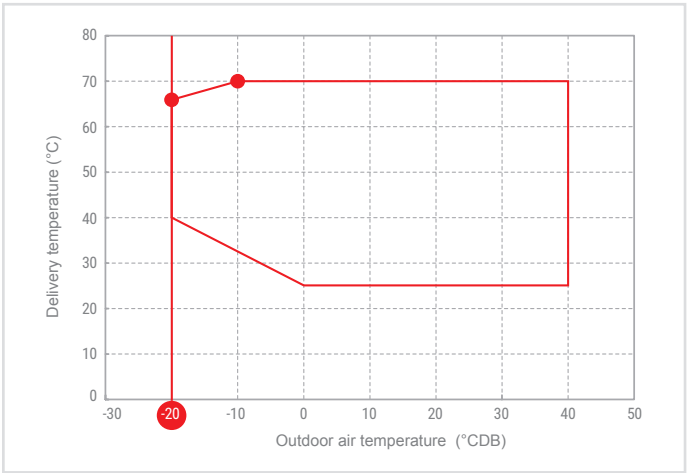


Backup and rotation functions

Backup Function Rotation Function

The CAHV packaged system is highly reliable thanks to its Backup* function, which ensures that if one of the compressors in an individual system fails, the other will continue operating to avoid the inconvenience of the system shutting down completely. Obviously heat capacity is halved under these conditions.

Another key function for ensuring uniform operation and optimal compressor lifetime in CAHV packaged systems in multiple configurations is the Rotation function. This ensures that when an installation has two or more systems, the individual systems will operate in turn if thermal demand does not require simultaneous operation.

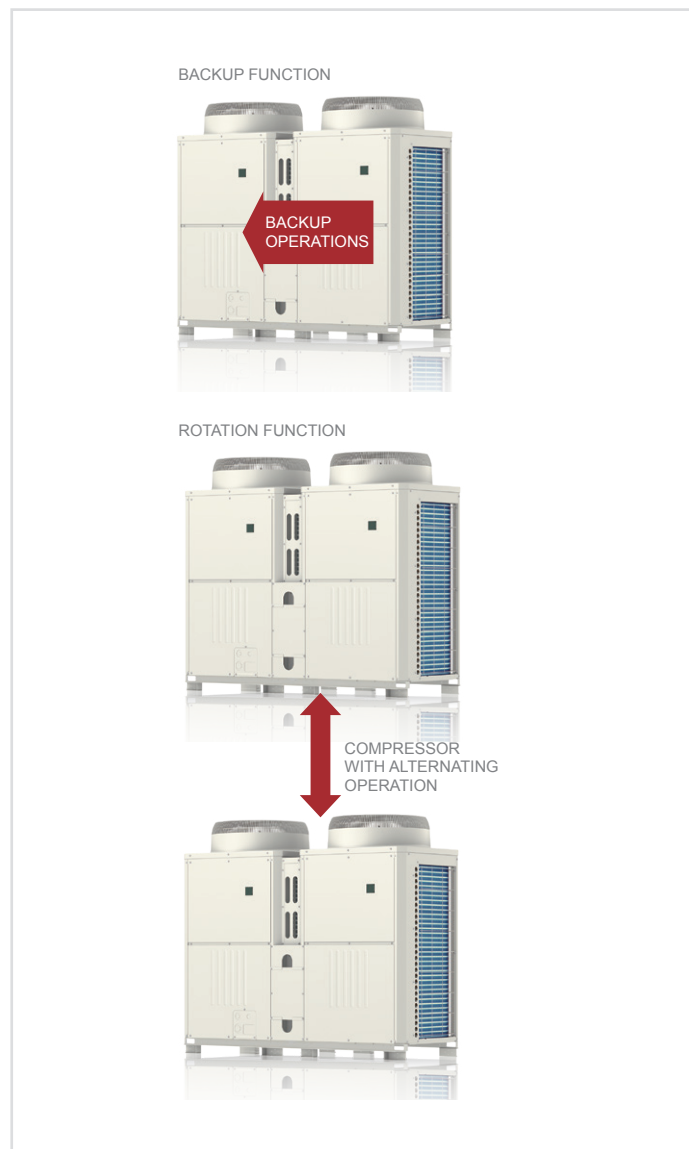

Cascade systems

When the demand for large volumes of hot water production is high, a flexible, modular thermal power installation may be created with up to 16 CAHV packaged systems, for a maximum output of up to 720 kW. This solution offers a high level of modularity thanks to the 2 DC scroll inverter compressors installed in an individual system, ensuring that thermal power is adjusted progressively and with extreme precision in relation to actual hot water demands. This optimises the operation of the entire installation, with only part of the CAHV packaged system operating under medium-load conditions during typical spring and autumn temperatures. A malfunction in one or several CAHV packaged systems will not compromise the operation of the other systems in the installation, ensuring safety and continuous operation.



High-pressure fans

60 Pa
External static pressure

The latest fan technology used in the CAHV packaged system enables the creation of ducted installations, further increasing system flexibility. The external static pressure of the fans can be set at between 0 Pa and 60 Pa.

External remote control

Wide variety of external input/output

A wide choice of analogue and digital inputs and digital outputs available with the system's electronics enables remote control operation (via a BMS, timer or external contacts). The following are just some of the available input signals:

- Option of selecting operating mode and hot water production temperature setpoint, choosing Heating Mode or ECO Heating Mode. The latter mode is particularly advanced, as it uses the outdoor air compensation curve to automatically determine the water delivery setpoint.
- Option of selecting operating mode and hot water production temperature setpoint, choosing Domestic Hot Water Mode or Heating Mode. This makes it possible to configure two different water temperature setpoints, a higher value for domestic hot water production and a lower value for heating. This improves performance at partial loads, as DHW is only produced when required.
- Selecting Efficiency Mode (COP) or Capacity Mode for unit operation. This means system operation can be optimised in relation to demand, increasing power or performance depending on requirements.
- Selecting ON/OFF on the basis of the signals received from the flow regulator switch and the circulation pump, for increased protection of the hydronic circuit and satisfactory system operation.

The following are just some of the available output signals:

- A digital output can be enabled at a selectable minimum water temperature to start an alternative heat generator (boiler, solar panel etc.) to substitute the system if it is OFF.
- Unit defrost signal.


The result is maximum control flexibility, either locally using the dedicated PAR-W21MAA remote controller, or remotely using external contacts.

Control and monitoring functionality with centralised WEB Server controllers

With the M-Net data transmission bus, the CAHV packaged system can interface with the centralised **WEB Server 3D Touch** and **3D Blind Controllers** of the VRF CITY MULTI control system range.

Depending on the application, the CAHV packaged system can therefore interface with a VRF CITY MULTI system to optimise operation when catering for hot water, heating and air conditioning demands, or to manage, monitor and supervise the system in a standalone configuration for applications solely requiring the production of large volumes of hot water. In both cases, the system can be controlled via a 10.4" backlit, colour touchscreen display on the 3DT controller, or via the Internet using the web pages for either centralised controller.

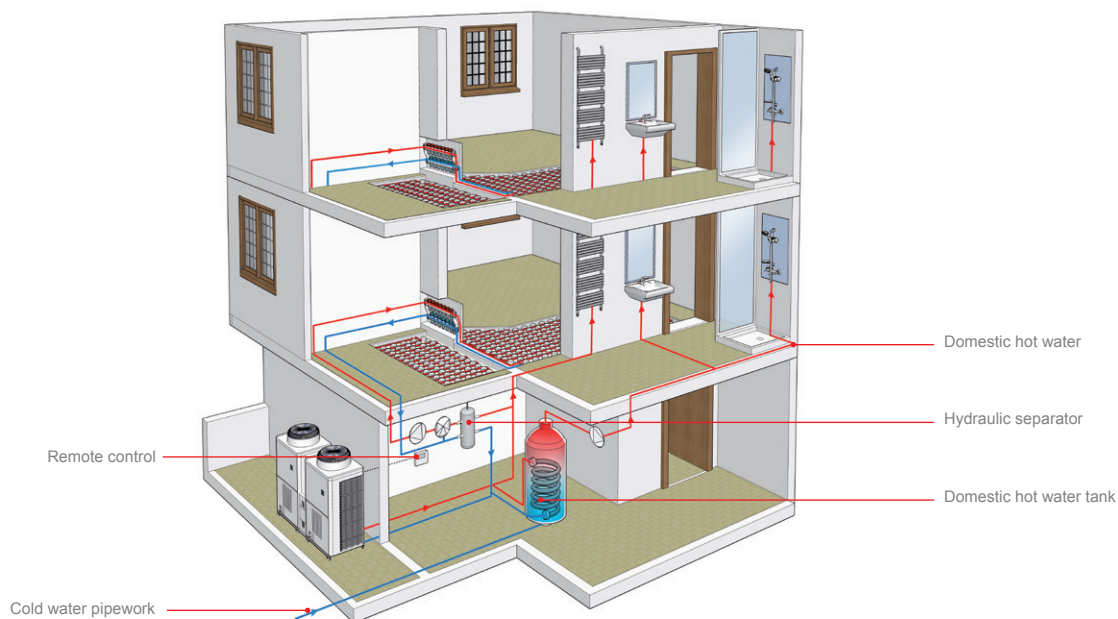

LAYOUT: ECODAN® PACKAGED HWHP CAHV (LOW AND HIGH TEMPERATURE HEATING + DHW)

Technical specifications HEATING/COOLING/DOMESTIC HOT WATER

MODEL				CAHV-P500YA-HPB(-BS)
	Power Supply	Voltage/Freq./Phases	V/Hz/no.	3 phases 380-400-415V; 50/60 Hz
Spring/Autumn heating	Nominal heating capacity ¹		kW	45,0
		Absorbed power	kW	12,9
		Absorbed current	A	21,78-20,69-19,94
		COP.		3,49
	Nominal heating capacity ²		kW	45,0
		Absorbed power	kW	10,9
		Absorbed current	A	10,6
		COP.		4,13
	Nominal heating capacity ³		kW	45,0
		Absorbed power	kW	25,6
		Absorbed current	A	43,17-41,01-39,53
		COP.		1,76
	Temperature range	Delivery water temperature	°CBS	25°C - 70°C
		Outdoor air temperature	°CBS	-20°C - 40°C
	Low water temperature 35°	Rank		A+
		ηS	%	139
	Medium water temperature 55°	Rank		A++
		ηS	%	125
	Water pressure drop		kPa	12,6
	Volume of circulating water		m³/h	7,5 - 15,0
	Water pipe diameters	Return	mm	38,1 (Rc 1 1/2")
		Delivery	mm	38,1 (Rc 1 1/2")
	Sound level ⁴ at 1 m		dBA	59
	Sound level ⁴ at 10 m		dBA	51
	External dimensions	HxWxD	mm	1710 x 1978 x 759
	Net weight		kg	526
	Ref. refill R407C/CO ₂ Eq		kg/Tons	11/19.51

Note:

¹ Nominal heating conditions: outdoor temperature of 7°C BS/6°C BU; water delivery temperature 45°C; water return temperature 40°C.

² Nominal heating conditions: outdoor temperature of 7°C BS/6°C BU; delivery water temperature 35°C; return water temperature 30°C.

³ Nominal heating conditions: outdoor temperature of 7°C BS/6°C BU; delivery water temperature 70°C.

⁴ GWP of HFC R407C equivalent to 1774 in line with regulation 517 / 2014.

* The water circuit must be a closed circuit.

* Install the unit in an environment where the outdoor wet bulb temperature does not exceed 32°C.



HWHP - CRHV

PACKAGED - WATER/WATER SYSTEM - Heating/Domestic Hot Water



WATER HEATING



DOMESTIC HOT WATER

The Ecodan® - Packaged HWHP (Hot Water Heat Pump) system consists of an outdoor monoblock air condensing unit which produces very high volumes of high-temperature hot water.

Packaged WtW heat pumps for hot water

With the latest Hot Water Heat Pump Packaged Water to Water CRHV system, Mitsubishi Electric has added to its range of heat pumps for hot water production and established the company as a leader in the manufacture of these systems. The CRHV packaged system is equipped with two compressors using R410A refrigerant, delivering a nominal capacity up to 60kW and drawing energy from the ground. It is the ideal solution for geothermal applications and applications using groundwater, river or lake water as a heat source to produce hot water for heating or domestic use up to 65°C. The Hot Water Heat Pump CRHV system offers class-beating innovation and efficiency.



Technology

SCOP
Over 4*

The new CRHV packaged system is also equipped with a flash-injection circuit designed for the VRF CITY MULTI ZUBADAN Y system (heat pump system for very cold climates). By using this advanced injection system and a highly efficient compressor, the CRHV packaged system can deliver


high-temperature hot water up to 65°C, and ensures fewer losses in terms of performance and capacity at very low outdoor temperatures.

* SCOP 4.33 - Outlet water/glycol temperature -3°C. Outlet water temperature 35°C.

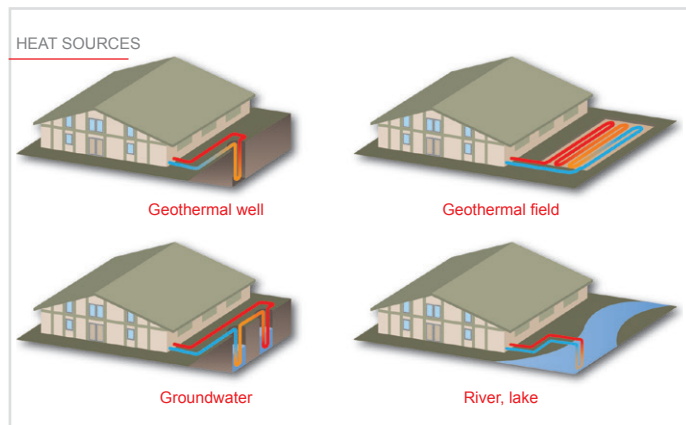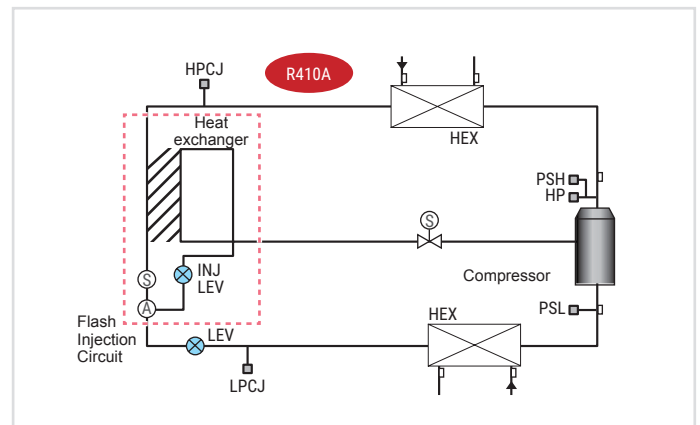


Upgrading existing systems

The latest CRHV packaged system can reuse existing geothermal probes or wells, adapting to their actual thermal capacity. The inverter-driven CRHV packaged system is capable of adjusting its thermal capacity to between 45kW and 60kW in relation to the actual amount of heat deliverable by the existing geothermal well.

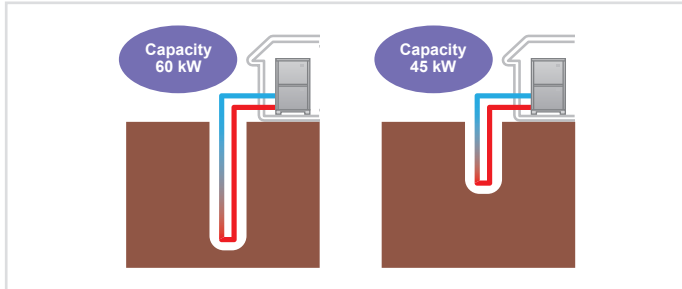

Operating temperatures

The new CRHV packaged system is capable of operating at incoming source water temperatures of between -8°C and 27°C with a counterflow configuration (the incoming source water temperature range can be extended up to 45°C using a parallel flow configuration). The water delivery temperature range is from 30°C to 65°C (in parallel flow configuration, the maximum water delivery temperature is 60°C at incoming water temperatures above 27°C). The CRHV packaged system is suited to indoor installation.

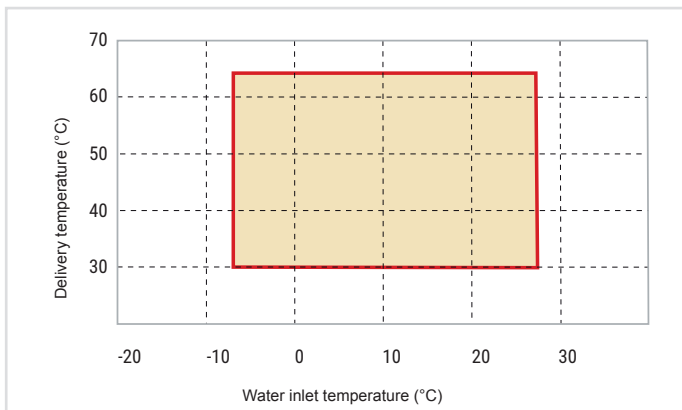

Finishing treatment

The module can also be ordered with a special protective finish on request, for installation in particularly harsh or corrosive environments.




Backup and rotation functions

Backup Function Rotation Function

The CRHV packaged system is highly reliable thanks to its Backup function, which ensures that if one of the compressors in an individual system fails, the other will continue operating to avoid the inconvenience of the system shutting down completely. Obviously heat capacity is halved under these conditions.

Another key function for ensuring uniform operation and optimal compressor lifetime in compressors in CRHV packaged systems in multiple configurations is the Rotation function. This ensures that when an installation has two or more systems, the individual systems will operate in turn if thermal demand does not require simultaneous operation.

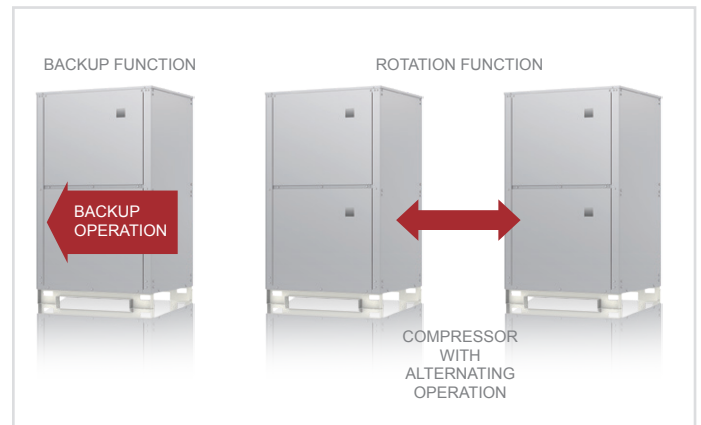

Cascade systems

When the demand for large volumes of hot water production is high, a flexible, modular thermal power installation can be created with up to 16 CRHV packaged systems, for a maximum output of up to 960 kW, with integrated cascade control.

This solution offers a high level of modularity thanks to the 2 DC scroll inverter compressors installed in an individual system, ensuring that thermal power is adjusted progressively and with extreme precision in relation to actual hot water demands. This optimises the operation of the entire installation, with only part of the CRHV packaged system operating under medium-load conditions during typical spring and autumn temperatures.

A malfunction in one or several CRHV packaged systems will not compromise the operation of the other systems in the installation, ensuring safety and continuous operation.



External remote control

Wide variety of external input/output

A wide choice of analogue and digital inputs and digital outputs available with the system's electronics enables remote control operation (via a BMS, timer or external contacts). The following are just some of the available input signals:

- Option of selecting operating mode and hot water production temperature setpoint, choosing Heating Mode or ECO Heating Mode. The latter mode is particularly advanced, as it uses the outdoor air compensation curve to automatically determine the water delivery setpoint.
- Option of selecting operating mode and hot water production temperature setpoint, choosing Domestic Hot Water Mode or Heating Mode. This makes it possible to configure two different water temperature setpoints, a higher value for domestic hot water production and a lower value for heating. This improves performance at partial loads, as DHW is only produced when required.
- Selecting Efficiency Mode (COP) or Capacity Mode for unit operation. This means system operation can be optimised in relation to demand, increasing power or performance depending on requirements.
- Selecting ON/OFF on the basis of the signals received from the flow regulator switch and the circulation pump, for increased protection of the hydronic circuit and satisfactory system operation.

The following are just some of the available output signals:


- A digital output can be enabled at a selectable minimum water temperature to start an alternative heat generator (boiler, solar panel etc.) to substitute the system if it is OFF.
- 3-way valve control in relation to hot water or heating demands.
- Pump control on circuit hot water side and heat source side (ON/OFF).

The result is maximum control flexibility, either locally using the dedicated PAR-W21MAA remote controller, or remotely using external contacts.

Compact dimensions

The unit has a compact footprint thanks to the latest, highly-efficient heat exchanger with low pressure losses. Installation footprint 0.73 m²*

*Dimensions of a unit excluding service space.

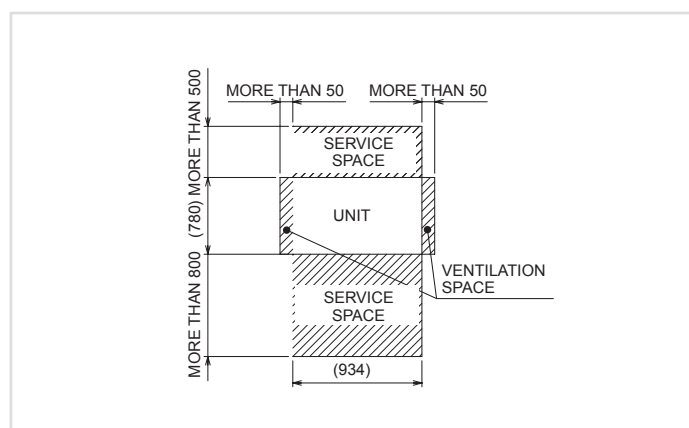


Control and monitoring functionality with centralized WEB Server controllers

With the M-Net data transmission bus, the CRHV packaged system can interface with the centralised **WEB Server 3D Touch** and **3D Blind Controllers** of the VRF CITY MULTI control system range. Depending on the application, the CRHV packaged system can therefore interface with a VRF CITY MULTI system to optimise operation when catering for hot water, heating and air conditioning demands, or to manage, monitor and supervise the system in a standalone configuration for applications solely requiring the production of large volumes of hot water. In both cases, the system can be controlled via a 10.4" backlit, colour touchscreen display on the 3DT controller, or via the Internet using the web pages for either centralised controller.



LAYOUT: ECODAN® PACKAGED HWHP CRHV (LOW AND HIGH TEMPERATURE HEATING + DHW)

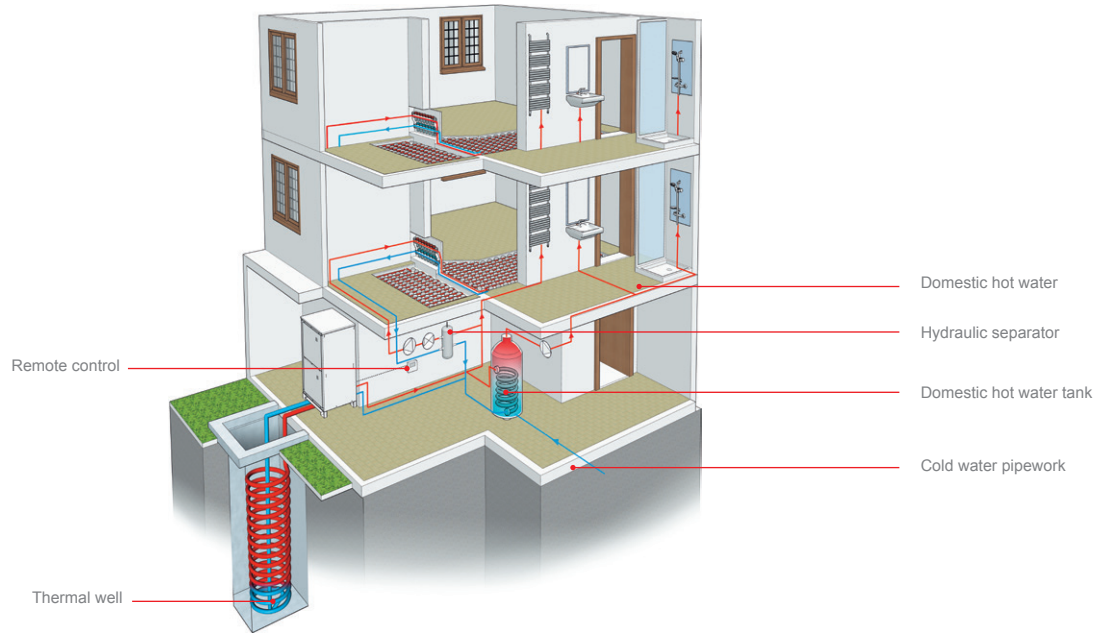

Technical specifications HEATING/COOLING/DOMESTIC HOT WATER

MODEL				CRHV-P600YA-HPB
Spring/Autumn heating	Power Supply	Voltage/Freq./Phases	V/Hz/no.	3 phases 380-400-415V; 50/60 Hz
	SCOP (power 60 kW) EN14825 Avg. clim. cond.	Heat source water/glycol 0°C/-3°C, Hot water 30°C/35°C		4,33
		Heat source water/glycol 0°C/-3°C, Hot water 47°C/55°C		2,89
	Nominal heating capacity ¹	Absorbed power	kW	60
		Absorbed current	A	14,2
		COP		24,0 - 22,8 - 22,0
		Flow rate of water in circuit	m³/h	4,23
		Flow rate of heat source water/glycol	m³/h	10,3
	Nominal heating capacity ²	Absorbed power	kW	14,7
		Absorbed current	A	14,7
		COP		45
		Flow rate of hot water in circuit	m³/h	10,2
		Flow rate of heat source water/glycol	m³/h	17,2 / 16,4 / 15,8
	Heat source liquid			Ethylene Glycol 35 WT
	Temperature range ⁴	Hot water side	°C	30 - 65
		Heat source water/glycol side	°C	-8 - 27
	Low water temperature 35°	Rank		A++
		ηS	%	153
	Medium water temperature 55°	Rank		A++
		ηS	%	127
	Water pressure drop	Hot water side ³	kPa	14
		Heat source water/glycol side ³		38
	Water pipe diameters	Return	mm	50,8 (Rc 2") threaded
		Delivery	mm	50,8 (Rc 2") threaded
	Flow rate of water in circuit	Hot water side	m³/h	3,2 - 15,0
		Heat source water/glycol side	m³/h	4,5 - 16,0
	Sound level at 1 m		dBA	50
	External dimensions HxWxD	HxWxD	mm	1561 x 934 x 780
	Net weight		kg	395
	Ref. refill R410A/CO ₂ Eq		kg/Tons	9/18.79

Note:

¹ Nominal heating conditions: hot water delivery temperature 35°C; water/glycol outlet temperature -3°C; hot water return temperature 30°C; water/glycol inlet temperature 0°C.

² Includes the power absorbed by the pump in accordance with EN14511

³ Nominal heating conditions: hot water delivery temperature 35°C; water/glycol outlet temperature -3°C; hot water return temperature 30°C; water/glycol inlet temperature 0°C. Power 60 kW, hot water flow rate 10.3 m³; water/glycol flow rate 14.7 m³

⁴ GWP of HFC R410A equivalent to 2088 in line with regulation 517 / 2014.

Ventilation

All fresh air (AFA)

PEFY-P VMHS-E-F Outdoor fresh air intake unit (afa)	238
--	-----

Lossnay enthalpy heat recovery (LGH)



LGH-RVS - Ducted sensible heat recovery unit	240
---	-----

LGH-RVX (T) Lossnay - Heat recovery ventilation unit	244
---	-----

Outdoor air treatment indoor units (GUF)

GUF-RD(H)4 Monoblock indoor unit with fresh air intake fan	250
---	-----



TYPE	MODEL NAME	MODEL	
All fresh air (AFA)	PEFY-P125VMHS-E-F PEFY-P200VMHS-E-F PEFY-P250VMHS-E-F		
Lossnay Enthalpy heat recovery (LGH)	LGH-RVS-E		
	LGH-50RVX-E LGH-65RVX-E LGH-80RVX-E LGH-100RVX-E		
	LGH-150RVX-E LGH-200RVX-E		
	LGH-150RVXT-E LGH-200RVXT-E LGH-250RVXT-E		
Outdoor air treatment indoor units (GUF)	GUF-50RD(H)4 GUF-100RD(H)4		

	Air flow (mc/h)						
	500	600	800	1000	1500	2000	2500
				<div></div>	<div></div>	<div></div>	
	<div></div>		<div></div>	<div></div>			
	<div></div>	<div></div>	<div></div>	<div></div>			
					<div></div>	<div></div>	
					<div></div>	<div></div>	<div></div>
	<div></div>			<div></div>			

PEFY-P VMHS-E-F

OUTDOOR FRESH AIR INTAKE UNIT (AFA)



Ideal for...

...feeding temperature-controlled fresh outdoor air into building. The ideal solution for offices, large stores and restaurants.

Enables intake of outside air

The indoor purified air delivery unit may be installed anywhere. The purified air delivery unit may be used to feed fresh, purified outdoor air into any building, in any place and at any time.

Controllable outlet air temperature

With new PEFY-P VMHS-E-F is possible to operate **Supply Air** temperature control.

OPERATION MODE	TEMPERATURE RANGE SETTABLE
COOL mode	14°C - 30°C
HEAT mode	17°C - 28°C
AUTO mode (single set point)	17°C - 28°C
FAN	Not settable

* In some cases the temperature of the air introduced into the ambient may be subject to fluctuations due to the conditions of the external air and to the operating conditions of the system.


Equipped with new DC fan motor

Fan motor has been changed to higher efficiency DC motor. Power source has been changed from three-phase power supply to **single-phase** power supply for all sizes.


Maximum connectable indoor units capacity to outdoor unit

Max. 110% of outdoor unit capacity (100% in case of heating below -5°C).

INSTALLATION OF INDOOR FRESH
OUTDOOR AIR TREATMENT UNIT

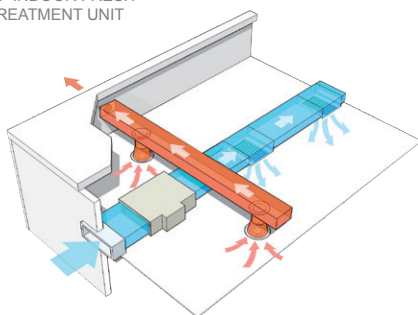

OPERATING SCHEME - EXAMPLE

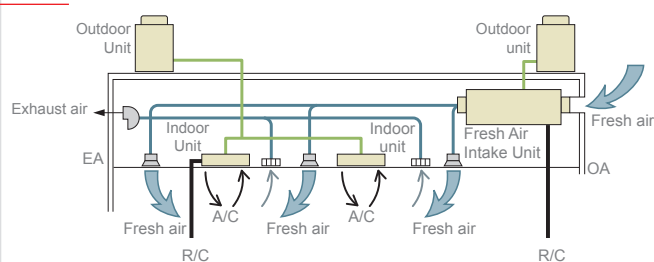

Flexible air-flow setting

4 levels of external static pressure to choose. External static pressure can be set also by remote controller (PAR-33/40MAA, PAR-U02MEDA and PAR-CT01MA).

MODEL	P125	P200	P250
External Static Pressure (Pa)	<100>-<150>-200-<250>		

* The factory setting of external static pressure is shown without chevrons "< >".

Two types of air-flow modes are available, each of which has three air-flow rates to choose from:

- Normal Airflow rate
- High Airflow rate


Air-flow rates are accessible from the remote controller (PAR-33/40MAA, PAR-U02MEDA and PAR-CT01MA).

Mode	Normal-airflow rate	High-airflow rate
Air-flow rate	Low-Medium-High	Low-Medium-High

Drain pump (optional)

Greater design flexibility made possible by the increased head height (700 mm max).

UNIT MODEL	DRAIN PUMP MODEL
PEFY-P125 VMHS-E-F	PAC-DRP10DP-E2
PEFY-P200 VMHS-E-F	PAC-KE06DM-F
PEFY-P250 VMHS-E-F	PAC-KE06DM-F

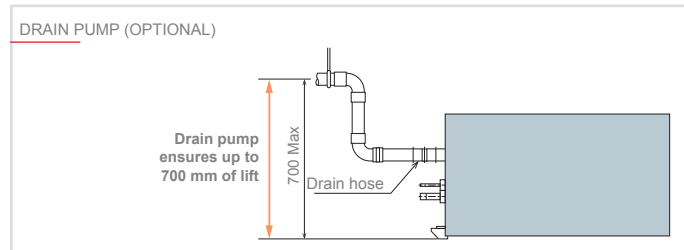

Specifications

MODEL			PEFY-P125VMHS-E-F	PEFY-P200VMHS-E-F	PEFY-P250VMHS-E-F			
Power source	V/phase/Hz		1 phase, 220-230-240V 50/60 Hz					
Cooling capacity ^{*1}		kW	14.0	22.4	28.0			
		Btu/h	47,800	76,400	95,500			
Heating capacity ^{*2}		kW	8.9	13.9	17.4			
		Btu/h	30,400	47,400	59,400			
Temperature range	Cooling		17°C D.B./15.5°C W.B. + 43°C D.B./35°C W.B. Thermo-off (FAN-mode) automatically starts if the outdoor temperature is lower than 17°C D.B.					
	Heating		-10°C D.B. + 20°C D.B. Thermo-off (FAN-mode) automatically starts if the outdoor temperature is higher than 20°C D.B.					
Power input ^{*3}	Cooling	kW	0.220	0.260	0.350			
	Heating	kW	0.230	0.270	0.360			
Current input ^{*3}	Cooling	A	1.43	1.66	2.16			
	Heating	A	1.52	1.85	2.38			
External finish			Galvanized					
External dimension HxWxD		mm	380x1195x900	470x1250x1120	470x1250x1120			
Net weight		kg	49	78	81			
Heat exchanger			Cross fin (aluminum fin and copper tube)					
Motor	Type		DC Motor					
	Output	kW	0.244	0.375	0.375			
Refrigerant piping diameter	Gas (brazed)	mm	15.88	19.05	22.22			
	Liquid (brazed)	mm	9.52	9.52	9.52			
Field drain pipe size		mm	O.D. 32	O.D. 32	O.D. 32			
Fan	Type x Quantity		Sirocco fan x 1	Sirocco fan x 2	Sirocco fan x 2			
	External static press. ^{*4}	Pa	<100> - <150> - 200 - <250>					
	Air flow rate ^{*5}		Normal Airflow rate mode	High Airflow	Normal Airflow	High Airflow		
		m³/min	14.0 - 15.5 - 18.0	15.5 - 18.0 - 20.0	22.5 - 25.0 - 28.0	25.0 - 28.0 - 32.0	28.0 - 31.0 - 35.0	31.0 - 35.0 - 40.0
		L/s	233 - 258 - 300	258 - 300 - 333	375 - 417 - 467	417 - 467 - 533	467 - 517 - 583	517 - 583 - 667
cfm		494 - 547 - 636	547 - 636 - 706	794 - 883 - 898	883 - 989 - 1,130	989 - 1,095 - 1,236	1,095 - 1,236 - 1,412	
Sound pressure level ^{*2} (Low-Mid-High)			Normal Airflow	High Airflow	Normal Airflow	High Airflow		
		dB(A)	34-37-41	36-40-42	35-38-41	36-39-42	38-40-44	38-41-45

¹⁾ Cooling capacity indicates the maximum value at operation under the following condition. Cooling: Indoor 33°CDB/28°CWB, Outdoor 33°CDB. The set temperature of the remote controller is 18°C.

²⁾ Heating capacity indicates the maximum value at operation under the following condition. Heating: Indoor 0°CDB/-2.9°CWB, Outdoor 0°CDB/-2.9°CWB. The set temperature of the remote controller is 25°C.

³⁾ The value are measured at the factory setting of airflow mode and external static pressure.

⁴⁾ The factory setting of airflow mode and external static pressure mode is shown without < >. Refer to "Fan characteristics curves", according to the external static pressure, in DATA BOOK for the usable range of air flow rate.

⁵⁾ If the airflow rate is over the usable range, dew drop can be caused from the air outlet and the air flow rate is changed automatically because of the output down by the fan motor control. If the air flow rate is less than the usable range, condensation from the unit surface can be caused.

The combination of fresh air intake type indoor units with other types of indoor units to handle internal thermal load which may cause the conflict of operation mode. It is not recommended when fresh air intake type indoor unit is connected to the Y or VVY series.

Depending on the air conditioning load, outside temperature, and due to the activation of protection functions, the desired preset temperature may not always be achieved and the discharge temperature may swing. Note that untreated outside air may be delivered directly into the room upon the activation of protection functions.

Fresh air intake type indoor units cannot be connected to PUMY and cannot be connected to an outdoor unit together with PWFY series.

The maximum connectable indoor units to 1 outdoor unit are 110% (100% in case of heating below -5°C).

When fresh air intake type indoor units connect to an outdoor unit together with other types of indoor unit, the total capacity of fresh air intake type indoor units needs to be 30% or less of the connected outdoor unit capacity.

The AUTO mode on the local remote controller is available only when fresh air intake type indoor unit is connected to the R2 or WR2 series of outdoor unit.

The system changeover function is available only when all the connected indoor units are fresh air intake type indoor units.

The fan temporary stops during defrost.

The cooling and heating capacities are the maximum capacities that were obtained by operating in the above air conditions and with a refrigerant pipe of about 7.5 m and a level difference of 0 m.

The actual capacity characteristics vary with the combination of indoor and outdoor units. See the technical information in DATA BOOK for the details.

Thermo off (Fan) operation automatically starts either when temperature is lower than 17°CDB in cooling mode or when the temperature exceeds 20°CDB in heating mode.

Dry mode is not available.


When this unit is used as sole A/C system, be careful about the dew in air outlet grilles in cooling mode.

Un-conditioned outdoor air such as humid air or cold air blows to the indoor during thermo off operation. Please be careful when positioning indoor unit air outlet grilles, ie take the necessary precautions for cold air, and also insulate rooms for dew condensation prevention as required.

Air filter must be installed in the air intake side. The filter should be attached where easy maintenance is possible in case of usage of field supply filters.

LGH-RVS NEW

DUCTED SENSIBLE HEAT RECOVERY UNIT

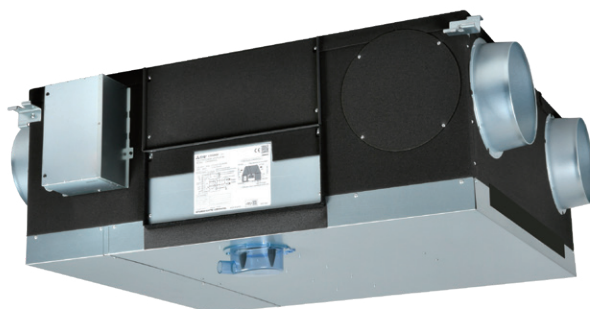

SIZES	
LGH-50RVS	500 mc/h @ 150 Pa
LGH-80RVS	800 mc/h @ 170 Pa
LGH-1000RVS	1000 mc/h @ 190 Pa


Standard filter (provided with the unit)	Optional filter
G3 (Coarse 50%)	F8 (ePM1 65%)

Ideal for...

Ducted indoor unit equipped with fresh air intake fan, exhaust fan, filtering system, Lossnay sensitive heat recovery system and bypass damper.

Sensible heat recovery unit

The new Lossnay LGH-RVS sensible heat recovery unit caters to different needs thanks to its features and accessories. Ease of installation, ultra-quiet operation and recovery efficiency are the three key features of this model.

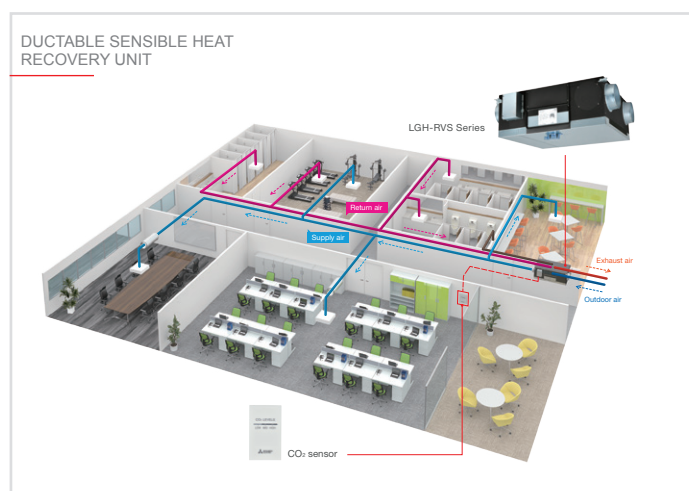

CO₂ sensor (optional)

A CO₂ sensor connected directly to the unit means that the airflow rate can be optimised according to the level of carbon dioxide detected in the room, improving heat exchange efficiency and contributing to energy saving.

AIRFLOW MODULATION WITH CO₂ SENSOR



OPTIONAL CO₂ SENSOR



PZ-70CSW-E (sensor for wall-mounted installation). The CO₂ levels are indicated by the LEDs on the sensor.




PZ-70CSB-E (sensor built into the unit)

Easy installation


Lighter weight

Being lightweight is one of the most important factors in installation. The lightweight frame of the LGH-RVS series can provide a huge advantage in terms of installation cost and safety.

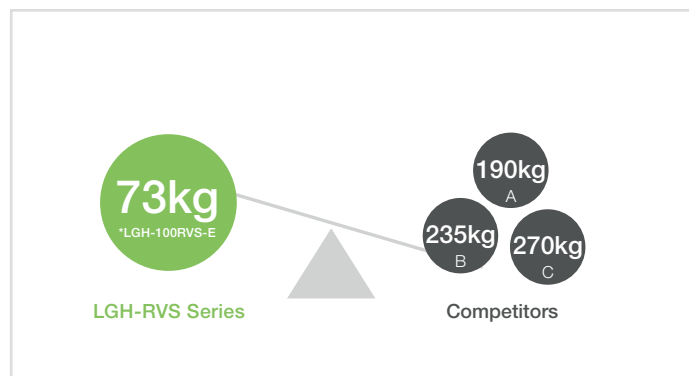

Single condensate drain

The LGH-RVS unit is equipped with a special condensate drain that allows the connection of a single condensate evacuation pipe. Connection to the pipeline is made easy thanks to the rotating connection system. Furthermore, thanks to the special design of the new drainage system, there is no need for an external siphon.

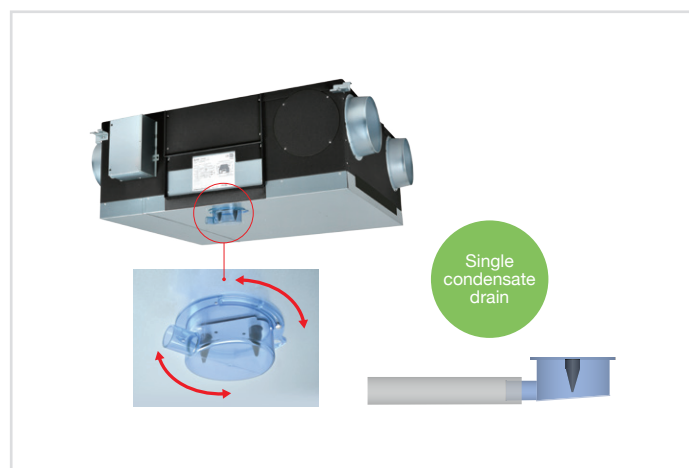

Silent and efficient operation


The new LGH-RVS recovery unit has extremely low noise emissions thanks to the special sirocco fan produced by Mitsubishi Electric coupled with a high-efficiency motor.



Dedicated PZ-62DR-EB wired controller

The new PZ-62DR-EB controller can be used to control all the functions of the LGH-RVS unit.

If the PZ-70CSW-E (optional) or PZ-70CSB-E (optional) CO₂ sensor is used, the carbon dioxide concentration in the room can be displayed on the control unit's display.

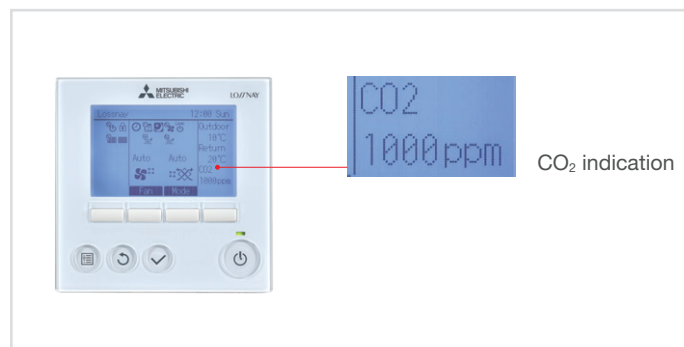


Customisable filtration level

The new LGH-RVS is fitted with G3 filters (Coarse 50%) as standard. F8 filters can be used for high performance filtration

Filter Model	Class. EN779:2012	Class. ISO16890:2016	No. filters per set	Compatible VL model	Filter position	Maintenance	Filter life*
PZ-S50RF-E	G3	Coarse 55%	2	LGH-50RVS-E	RA, OA	Clean the air filter once a year	Approx. 5 years with periodic cleaning/maintenance
PZ-S80RF-E				LGH-80RVS-E			
PZ-S100RF-E				LGH-100RVS-E			
PZ-S50RFH-E	F8	ePM1 65%	2	LGH-50RVS-E	SA	Disposable filter. No cleaning/washing	Approximately one year or when blocked
PZ-S80RFH-E				LGH-80RVS-E			
PZ-S100RFH-E				LGH-100RVS-E			

Airflow modulation

The fan inverter motor, designed and manufactured directly by Mitsubishi Electric, guarantees maximum performance with minimum energy consumption and allows **inlet and outlet ventilation speed modulation from 25% to 100%** (+/- 5% increments/decrements).

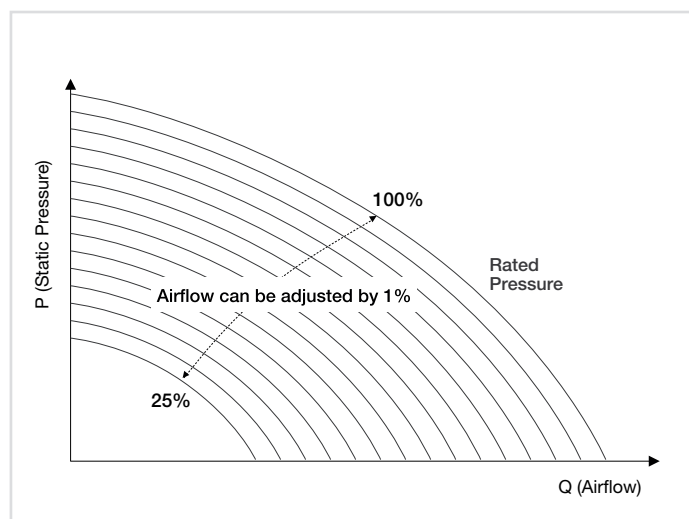

MELCloud connection (optional)


The unit can be controlled and monitored remotely via the **MelCloud** platform. This requires the installation of the optional **MAC-587IF-E** interface card.



Technical data LGH-50RVS-E

MODEL			LGH-50RVS-E			
Electrical power supply	V/Phase/Hz		220-240/MONOPHASE /50			
Fan speed			100%	75%	50%	25%
Input power		W	190	110	60	25
Air volume		m³/h	500	375	250	125
		L/s	139	104	69	35
External static pressure		Pa	150	84	38	9
Sensible heat exchange efficiency		%	87	89	91	93
Standard filter	EN 779 (ISO 16890)		G3 (Coarse 35%)			
Noise		dB(A)	33	27	22	18
Weight		kg	55			
Dimensions	HxLxD	mm	529 x 974 x 946			
Guaranteed field of operation (continuous operation)*	Outdoor temp.	°C	0 ~ +40			
	Max. indoor temp.	%	40			
	Max. indoor RU	°C	90			
	Max. indoor AH	%	0.0139			


DIAGRAM LGH-50RVS-E

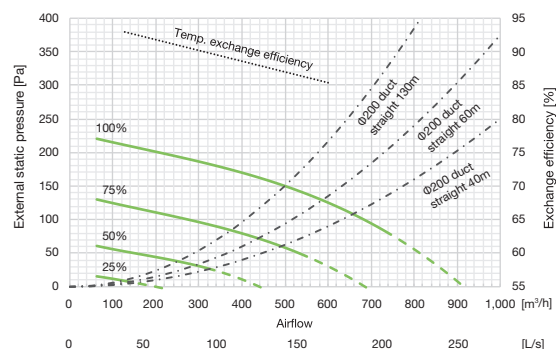

Technical data LGH-80RVS-E

MODEL			LGH-80RVS-E			
Electrical power supply	V/Phase/Hz		220-240/MONOPHASE /50			
Fan speed			100%	75%	50%	25%
Input power		W	325	175	85	32
Air volume		m³/h	800	600	400	200
		L/s	222	167	111	56
External static pressure		Pa	170	96	43	11
Sensible heat exchange efficiency		%	82	84	86	90
Standard filter	EN 779 (ISO 16890)		G3 (Coarse 35%)			
Noise		dB(A)	36	30	25	18
Weight		kg	63			
Dimensions	HxLxD	mm	529 x 1185 x 997			
Guaranteed field of operation (continuous operation)*	Outdoor temp.	°C	0 ~ +40			
	Max. indoor temp.	%	40			
	Max. indoor RU	°C	90			
	Max. indoor AH	%	0.0139			


DIAGRAM LGH-80RVS-E

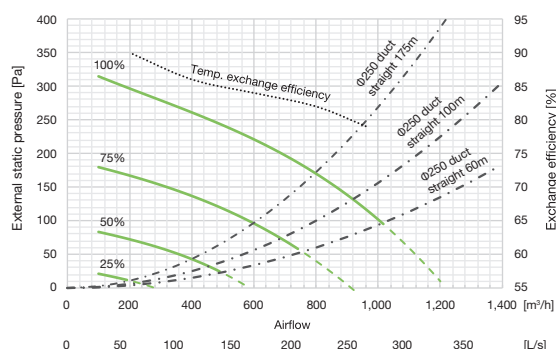

Technical data LGH-100RVS-E


MODEL			LGH-100RVS-E			
Electrical power supply	V/Phase/Hz		220-240/MONOPHASE /50			
Fan speed			100%	75%	50%	25%
Input power		W	445	225	100	35
Air volume		m³/h	1000	750	500	250
		L/s	278	208	139	69
External static pressure		Pa	190	107	48	12
Sensible heat exchange efficiency		%	82	84	86	90
Standard filter	EN 779 (ISO 16890)		G3 (Coarse 35%)			
Noise		dB(A)	37	32	24	18
Weight		kg	73			
Dimensions	HxLxD	mm	529 x 1185 x 1224			
Guaranteed field of operation (continuous operation)*	Outdoor temp.	°C	0 ~ +40			
	Max. indoor temp.	%	40			
	Max. indoor RU	°C	90			
	Max. indoor AH	%	0.0139			

DIAGRAM LGH-100RVS-E

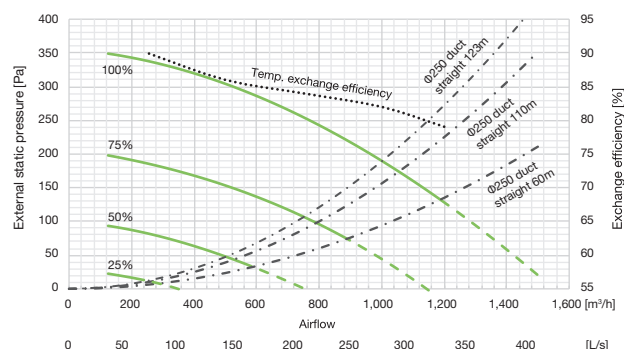

LGH-RVX(T)

LOSSNAY - Heat recovery ventilation unit

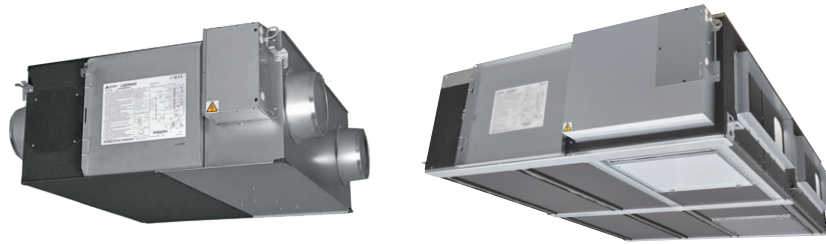

Lossnay – Heat recovery ventilation units


The importance of adequate air exchange

Air quality is a primary parameter for comfort. Poor air quality in the office or at home has been proven to have a significantly detrimental influence on productivity and on the healthiness of the environment, and contribute to fatigue. This is due to increasing concentrations of CO₂ caused by inadequate air exchange. To live comfortably, **every individual needs 400l of fresh air per hour**. Ensuring **adequate ventilation** in residential and commercial buildings is necessary **to offer a healthy, comfortable environment for all occupants**.


The importance of correctly controlled humidity

A dry environment offers the ideal conditions for the proliferation of **bacteria and viruses**, and the survival rate of these micro-organisms drops rapidly at relative humidity levels above 50%. **Excessively humid environments**, on the other hand, encourage the proliferation of **mould and mites**. Precise humidity control is therefore an important factor in maintaining ideal, healthy conditions.

OXYGEN CONCENTRATIONS AND THE EFFECTS OF INADEQUATE OXYGEN LEVELS

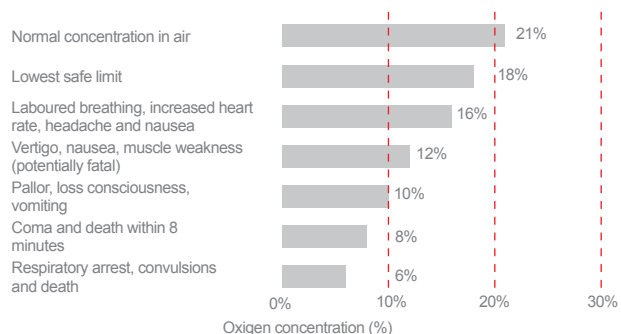


ACTIVITY OF MICRO-ORGANISMS IN RELATION TO HUMIDITY

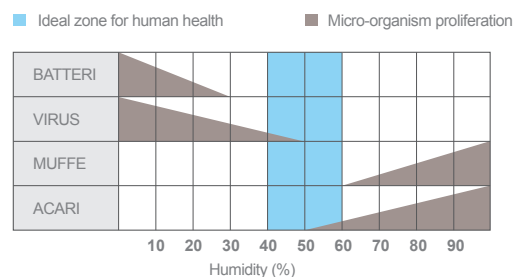

Source: ASHRAE Trans. 91 - 1B (1985)

Simple construction

As shown in the figure, the Lossnay exchanger consists of a structure in special treated paper allowing two different air flows to cross one another and exchange thermal energy. Partitions separating the inlet and outlet channels prevent incoming fresh air from ever mixing with outgoing air.

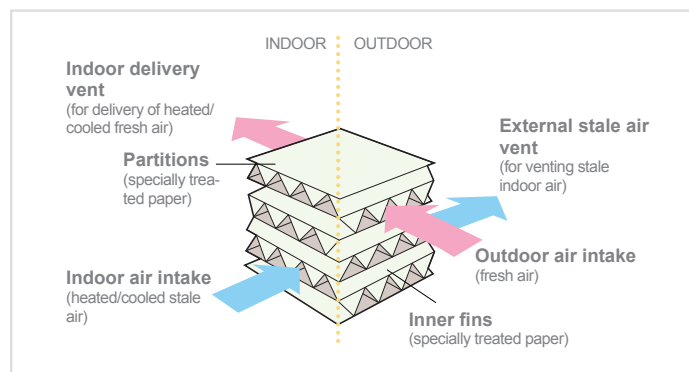


Energy recovery

Comfort and energy savings

With universally recognised efficiency, Lossnay heat exchanger ventilation units use energy recovery to offer significant energy savings.


A conventional ventilation system vents treated indoor air into the outdoor environment and replaces this air with outdoor air, causing the room to lose heat in winter and heat up in summer. This loss of heated/cooled air means that energy must be expended to restore comfortable temperature conditions in the indoor space. The result of this is notably higher air conditioning costs. To solve this problem while still ensuring the necessary air exchange, Mitsubishi Electric offers a range of thermal energy recovery ventilation systems, which minimise air conditioning costs.

All Lossnay units are equipped with class "G3" air filter as standard (Coarse 35% based on ISO 16890). LGH-RVX models may also be equipped with a class "M6" high efficiency filter (ePM10 75% based on ISO 16890).

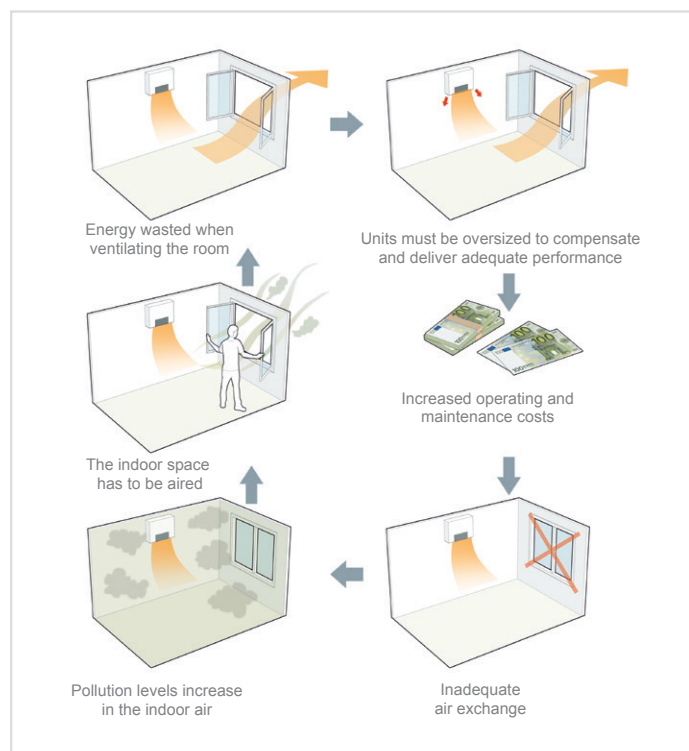

Operating principle

The Lossnay exchanger performs a highly effective total exchange action for both temperature (sensible heat) and humidity (latent heat) – the system uses moisture permeable partitions in specially treated paper to allow stale air to be vented externally and fresh outdoor air to be fed to the indoor space with absolutely no mixing between the two air flows.

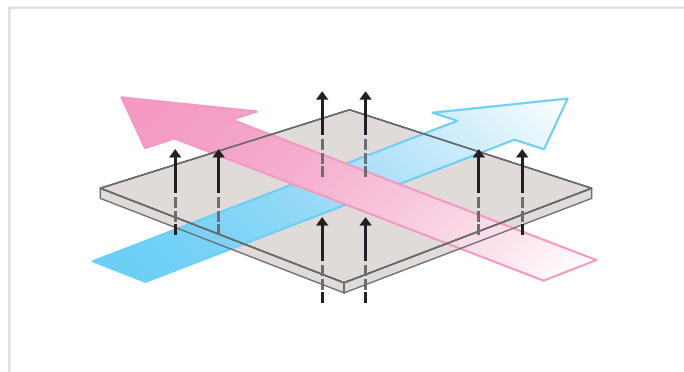


Comfortable air exchange action, in either cold or hot outdoor conditions

Summer - Difference in temperature between new fresh air and air already in room of only 1.7°C.

- Incoming fresh air is brought to the same conditions as the cooled (and dehumidified) air in the room.

Winter - 4 kg/h humidity recovered

- Incoming fresh air is brought to the same conditions as the warmed (and humidified) air in the room.

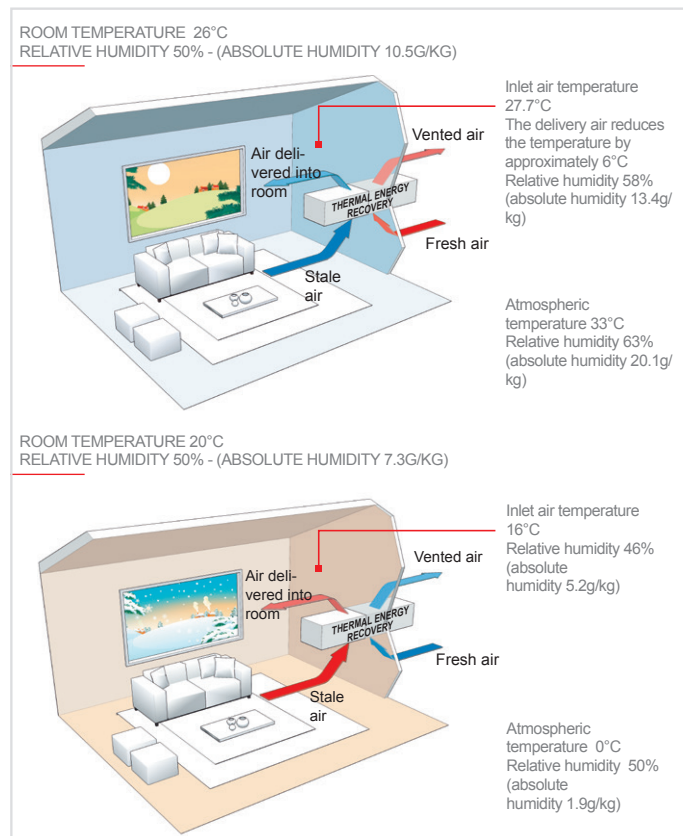

Low noise

Precise control over the flow of treated air significantly reduces the sound pressure values of the LOSSNAY unit by up to 18 dB(A). All LGH-RVX units ensure ideal acoustic comfort, including for residential applications, libraries, offices etc.




Lossnay for energy savings

New DC FAN Motor

The new **DC motor** used throughout the new LGH-RVX series offers a number of advantages:

- **Very low electric power consumption**, especially at low speeds
- Lower noise emissions
- Increased flexibility and fine air flow adjustment from remote control.

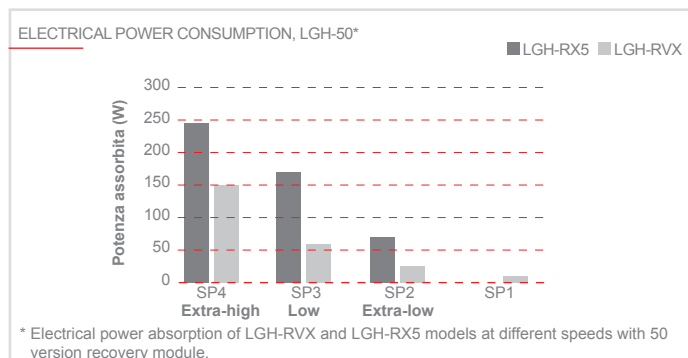


Bypass shutter

The LGH-RVX series is equipped with a bypass shutter:

When the shutter is open, fresh air is fed to the interior space with no heat recovery, passing through the filter only.

The bypass shutter may be activated manually from the remote control, or automatically in specific thermal conditions (Free-Cooling).

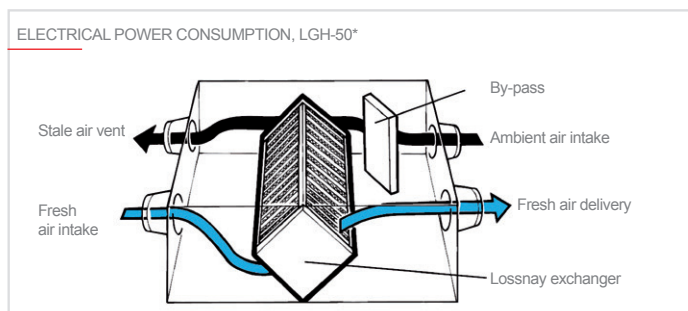

New PZ-62DR-E dedicated remote control

The new wired remote control unit specifically for LGH-RVX heat recovery units boasts a fresh new look and new features.

- Possibility of managing a group of up to 15 units
- Simple and intuitive
- Backlit LCD screen
- Internal weekly timer
- Custom ventilation strategies for mode switching (Auto/recovery/bypass)
- Night purge function for active night-time ventilation in summer.




Easy installation

High air volumes and low height.

Three new models with important innovations have supplemented the LGH enthalpic recuperators line.


The RVXT models treat high volumes of air (up to 250m³/h) and are extremely low in height (only 500mm), a feature that makes them exceptionally flexible during installation, especially where the height of the false ceiling does not allow the use of RVX models.

The RVXT models are also equipped with an enthalpy exchange package in treated paper and are fitted with "G3" filters as standard (Coarse 35% based on ISO 16890).

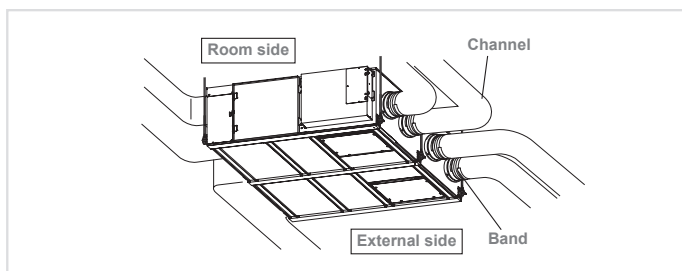


Technical specifications

MODEL			LGH-50RVX-E			
Power supply		V/Phase/Hz	220-240 / 1-phase /50			
Speed			SP4	SP3	SP2	SP1
Current		A	1.15	0.59	0.26-0.27	0.13
Power input		W	165-173	78-81	32-35	12-14
Air volume		m³/h	500	375	250	125
		L/s	138.9	104.2	69.4	34.7
External static pressure		mmH ₂ O	12.24	6.93	3.06	0.82
		Pa	120	68	30	8
Temp. heat exch. Efficiency		%	78.0	81.0	83.5	87.0
Total heat exch. Efficiency	Cooling	%	66.5	68.0	72.5	82.0
	Heating	%	69.0	71.0	75.0	82.5
Sound pressure level		dB(A)	34-35	28-29	19-20	18
Duct qty x diameter		mm	4 x 200	4 x 200	4 x 200	4 x 200
Wheight		kg	33	33	33	33
Dimensions	HxLxD	mm	331x1016 x888	331x1016 x888	331x1016 x888	331x1016 x888
Operating field*	Outdoor temp.	°C	-10 ~ +40	-10 ~ +40	-10 ~ +40	-10 ~ +40
	Max outdoor RH	%	80	80	80	80
	Max indoor temp	°C	40	40	40	40
	Max indoor RH	%	80	80	80	80

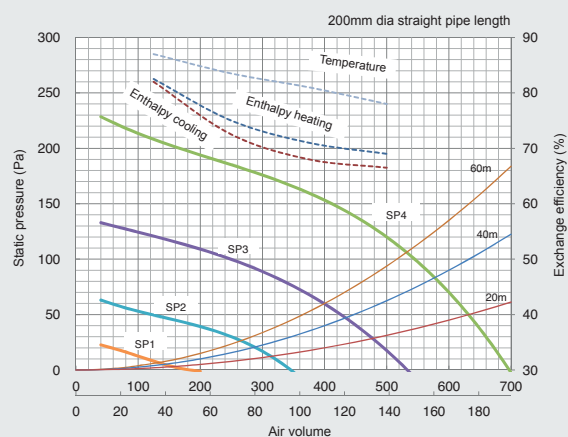


Technical specifications

MODEL			LGH-65RVX-E			
Power supply		V/Phase/Hz	220-240 / 1-phase /50			
Speed			SP4	SP3	SP2	SP1
Current		A	.65-1.72	0.90-0.86	0.39-0.38	0.15-0.16
Power input		W	252-262	131	49-47	15-17
Air volume		m³/h	650	488	325	163
		L/s	180.6	135.4	90.3	45.1
External static pressure		mmH ₂ O	12.24	6.93	3.06	0.82
		Pa	120	68	30	8
Temp. heat exch. Efficiency		%	77.0	81.0	84.0	86.0
Total heat exch. Efficiency	Cooling	%	66.0	69.5	74.0	81.0
	Heating	%	68.5	71.0	76.0	82.0
Sound pressure level		dB(A)	34.5-35.5	29	22	18
Duct qty x diameter		mm	4 x 200	4 x 200	4 x 200	4 x 200
Wheight		kg	38	38	38	38
Dimensions	HxLxD	mm	404x954 x908	404x954 x908	404x954 x908	404x954 x908
Operating field*	Outdoor temp.	°C	-10 ~ +40	-10 ~ +40	-10 ~ +40	-10 ~ +40
	Max outdoor RH	%	80	80	80	80
	Max indoor temp	°C	40	40	40	40
	Max indoor RH	%	80	80	80	80

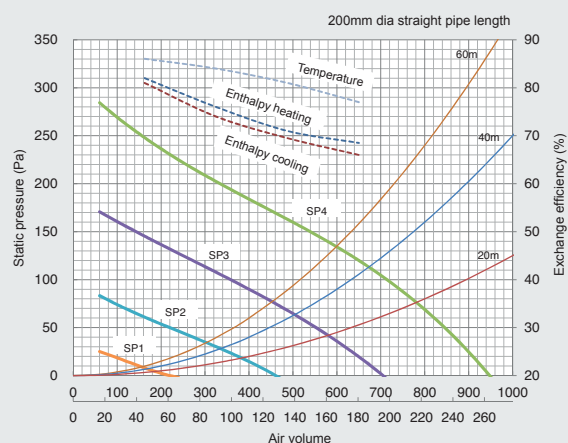

Technical specifications


MODEL			LGH-80RVX-E			
Power supply		V/Phase/Hz	220-240 / 1-phase /50			
Speed			SP4	SP3	SP2	SP1
Current		A	1.82-1.97	0.83-0.86	0.36-0.40	0.15-0.16
Power input		W	335-340	151	60-64	18-20
Air volume		m³/h	800	600	400	200
		L/s	222.2	166.7	111.1	55.6
External static pressure		mmH ₂ O	15.30	8.67	3.82	1.02
		Pa	150	85	37.5	10
Temp. heat exch. Efficiency		%	79.0	82.5	84.0	85.0
Total heat exch. Efficiency	Cooling	%	70.0	72.5	78.0	81.0
	Heating	%	71.0	73.5	78.0	81.0
Sound pressure level		dB(A)	34.5-36.0	30.0	23	18
Duct qty x diameter		mm	4 x 250	4 x 250	4 x 250	4 x 250
Wheight		kg	48	48	48	48
Dimensions	HxLxD	mm	404x1004 x1144	404x1004 x1144	404x1004 x1144	404x1004 x1144
Operating field*	Outdoor temp.	°C	-10 ~ +40	-10 ~ +40	-10 ~ +40	-10 ~ +40
	Max outdoor RH	%	80	80	80	80
	Max indoor temp	°C	40	40	40	40
	Max indoor RH	%	80	80	80	80

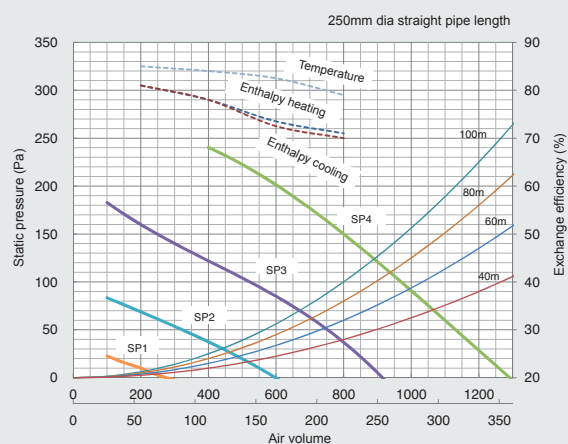

* In case of temperature < -10°C fan will work discontinuously. Lossnay controlled heat generator is recommended in this condition.


Technical specifications

MODEL			LGH-100RVX-E			
Power supply		V/Phase/Hz	220-240 / 1-phase /50			
Speed			SP4	SP3	SP2	SP1
Current		A	2.50	1.20	0.50-0.51	0.17-0.19
Power input		W	420	200	75	21
Air volume		m³/h	1000	750	500	250
		L/s	277.8	208.3	138.9	69.4
External static pressure		mmH ₂ O	17.34	9.75	4.33	1.08
		Pa	170	95.6	42.5	10.6
Temp. heat exch. Efficiency		%	80.0	83.0	86.5	89.5
Total heat exch. Efficiency	Cooling	%	71.0	73.0	77.0	85.5
	Heating	%	72.5	74.0	78.0	87.0
Sound pressure level		dB(A)	37-38	31-32	23-24	18
Duct qty x diameter		mm	4 x 250	4 x 250	4 x 250	4 x 250
Wheight		kg	54	54	54	54
Dimensions	HxLxD	mm	404x1231 x1144	404x1231 x1144	404x1231 x1144	404x1231 x1144
Operating field*	Outdoor temp.	°C	-10 ~ +40	-10 ~ +40	-10 ~ +40	-10 ~ +40
	Max outdoor RH	%	80	80	80	80
	Max indoor temp	°C	40	40	40	40
	Max indoor RH	%	80	80	80	80

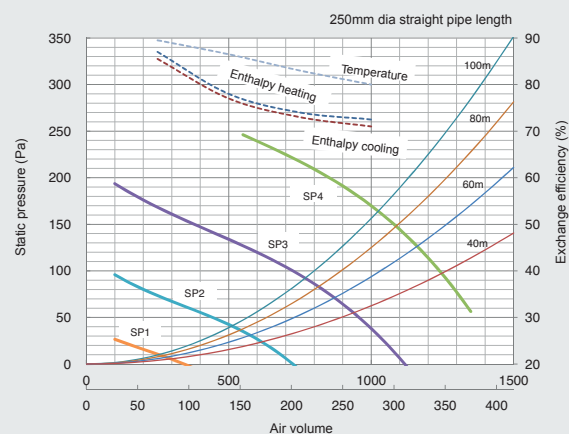


Technical specifications

MODEL			LGH-150RVX-E			
Power supply		V/Phase/Hz	220-240 / 1-phase /50			
Speed			SP4	SP3	SP2	SP1
Current		A	3.71-3.85	1.75-1.78	0.70-0.78	0.29-0.30
Power input		W	670-698	311	123-124	38-44
Air volume		m³/h	1500	1125	750	375
		L/s	416.7	312.5	208.3	104.2
External static pressure		mmH ₂ O	17.85	10.03	4.47	1.11
		Pa	175	98.4	43.8	10.9
Temp. heat exch. Efficiency		%	80.0	82.5	84.0	85.0
Total heat exch. Efficiency	Cooling	%	70.5	72.5	78.0	81.0
	Heating	%	72.0	73.5	78.0	81.0
Sound pressure level		dB(A)	39.0-40.5	32-33	24-26	18
Duct qty x diameter		mm	4 x 250 / 2 x 4 x 250 / 2 x (270x700)	4 x 250 / 2 x 4 x 250 / 2 x (270x700)	4 x 250 / 2 x 4 x 250 / 2 x (270x700)	4 x 250 / 2 x 4 x 250 / 2 x (270x700)
Wheight		kg	98	98	98	98
Dimensions	HxLxD	mm	808x1004x1144	808x1004x1144	808x1004x1144	808x1004x1144
Operating field*	Outdoor temp.	°C	-10 ~ +40	-10 ~ +40	-10 ~ +40	-10 ~ +40
	Max outdoor RH	%	80	80	80	80
	Max indoor temp	°C	40	40	40	40
	Max indoor RH	%	80	80	80	80

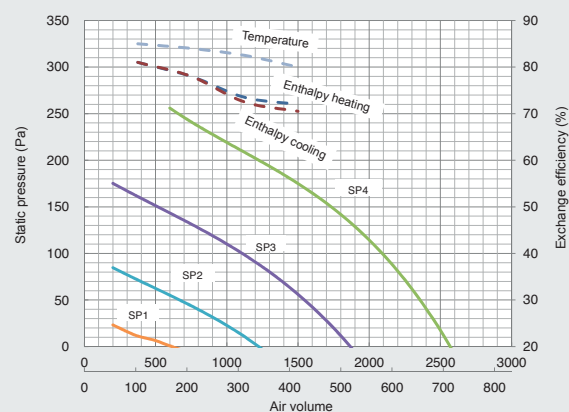

Technical specifications


MODEL			LGH-200RVX-E			
Power supply		V/Phase/Hz	220-240 / 1-phase /50			
Speed			SP4	SP3	SP2	SP1
Current		A	4.88-4.54	2.20-2.06	0.88-0.87	0.33-0.35
Power input		W	850-853	400-372	153-150	42-49
Air volume		m³/h	2000	1500	1000	500
		L/s	555.6	416.7	277.8	138.9
External static pressure		mmH ₂ O	15.30	8.61	3.82	0.97
		Pa	150	84.4	37.5	9.5
Temp. heat exch. Efficiency		%	80.0	83.0	86.5	89.5
Total heat exch. Efficiency	Cooling	%	71.0	73.0	77.0	85.5
	Heating	%	72.5	74.0	78.0	87.0
Sound pressure level		dB(A)	40-41	40-41	40-41	40-41
Duct qty x diameter		mm	4 x 250 / 2 x 4 x 250 / 2 x (270x700)	4 x 250 / 2 x 4 x 250 / 2 x (270x700)	4 x 250 / 2 x 4 x 250 / 2 x (270x700)	4 x 250 / 2 x 4 x 250 / 2 x (270x700)
Wheight		kg	110	110	110	110
Dimensions	HxLxD	mm	808x1231 x1144	808x1231 x1144	808x1231 x1144	808x1231 x1144
Operating field*	Outdoor temp.	°C	-10 ~ +40	-10 ~ +40	-10 ~ +40	-10 ~ +40
	Max outdoor RH	%	80	80	80	80
	Max indoor temp	°C	40	40	40	40
	Max indoor RH	%	80	80	80	80

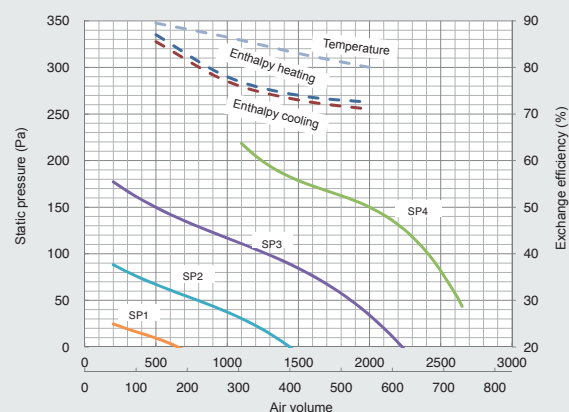

* In case of temperature < -10°C fan will work discontinuously. Lossnay controlled heat generator is recommended in this condition.


Technical specifications

MODEL			LGH-150RVXT-E			
Power supply		V/Phase/Hz	220-240 / 1-phase /50			
Speed			SP4	SP3	SP2	SP1
Current		A	4.30 - 3.40	2.40 - 1.80	1.10 - 0.77	0.36 - 0.31
Power input		W	792 - 625	421 - 334	176 - 134	48 - 37
Air volume		m³/h	1500	1125	750	375
		L/s	417	313	208	104
External static pressure		mmH ₂ O	175	98	44	11
		Pa	100	56	25	6
Temp. heat exch. Efficiency		%	80.0	80.5	81.0	81.5
Total heat exch. Efficiency	Cooling	%	69.0	70.0	72.0	74.0
	Heating	%	70.0	71.0	73.0	75.0
Sound pressure level		dB(A)	39.5	35.5	29.5	22.0
Duct qty x diameter		mm	4 x 250 / 2 x 4 x 250 / 2 x 4 x 250 / 2 x 4 x 250 / 2 x (250x750) (250x750) (250x750) (250x750)			
Wheight		kg	156	156	156	156
Dimensions	HxLxD	mm	500 x 1980 x 1500	500 x 1980 x 1500	500 x 1980 x 1500	500 x 1980 x 1500
Operating field*	Outdoor temp.	°C	-10 ~ +40	-10 ~ +40	-10 ~ +40	-10 ~ +40
	Max outdoor RH	%	80	80	80	80
	Max indoor temp	°C	40	40	40	40
	Max indoor RH	%	80	80	80	80

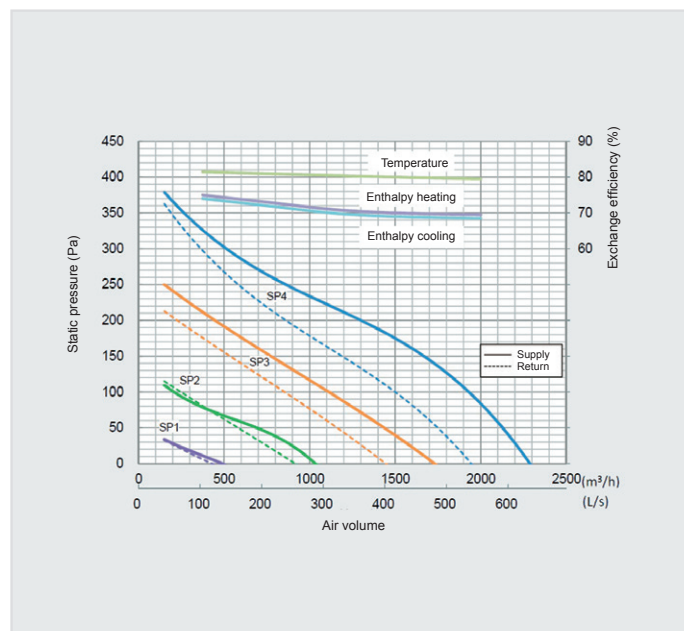


Technical specifications

MODEL			LGH-200RVXT-E			
Power supply		V/Phase/Hz	220-240 / 1-phase /50			
Speed			SP4	SP3	SP2	SP1
Current		A	5.40 - 5.00	2.70 - 2.20	1.10 - 0.85	0.39 - 0.34
Power input		W	1000 - 916	494 - 407	197 - 150	56 - 45
Air volume		m³/h	2000	1500	1000	500
		L/s	556	417	278	139
External static pressure		mmH ₂ O	175	98	44	11
		Pa	100	56	25	6
Temp. heat exch. Efficiency		%	80.0	81.0	82.5	84.0
Total heat exch. Efficiency	Cooling	%	70.0	71.0	74.5	80.5
	Heating	%	72.5	73.5	77.0	83.0
Sound pressure level		dB(A)	39.5	35.5	28.0	22.0
Duct qty x diameter		mm	4 x 250 / 2 x 4 x 250 / 2 x 4 x 250 / 2 x 4 x 250 / 2 x (250x750) (250x750) (250x750) (250x750)			
Wheight		kg	159	159	159	159
Dimensions	HxLxD	mm	500 x 1980 x 1500	500 x 1980 x 1500	500 x 1980 x 1500	500 x 1980 x 1500
Operating field*	Outdoor temp.	°C	-10 ~ +40	-10 ~ +40	-10 ~ +40	-10 ~ +40
	Max outdoor RH	%	80	80	80	80
	Max indoor temp	°C	40	40	40	40
	Max indoor RH	%	80	80	80	80

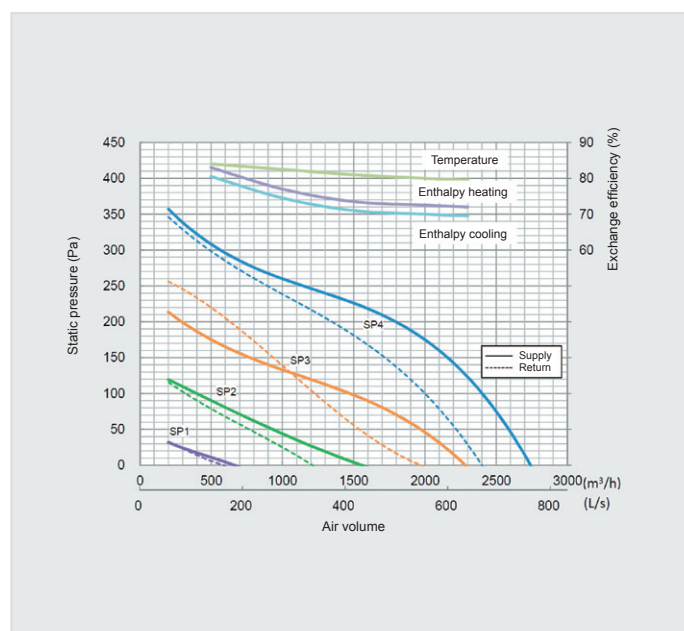

Technical specifications


MODEL			LGH-250RVXT-E			
Power supply		V/Phase/Hz	220-240 / 1-phase /50			
Speed			SP4	SP3	SP2	SP1
Current		A	7.60 - 6.90	3.60 - 3.10	1.40 - 1.30	0.57 - 0.49
Power input		W	1446 - 1298	687 - 587	244 - 212	82 - 69
Air volume		m³/h	2500	1875	1250	625
		L/s	694	521	347	174
External static pressure		mmH ₂ O	175	98	44	11
		Pa	100	56	25	6
Temp. heat exch. Efficiency		%	77.0	79.0	80.5	82.5
Total heat exch. Efficiency	Cooling	%	65.5	69.0	71.5	76.5
	Heating	%	68.0	71.5	74.0	79.0
Sound pressure level		dB(A)	43.0	39.0	32.0	24.0
Duct qty x diameter		mm	4 x 250 / 2 x 4 x 250 / 2 x 4 x 250 / 2 x 4 x 250 / 2 x (250x750) (250x750) (250x750) (250x750)			
Wheight		kg	198	198	198	198
Dimensions	HxLxD	mm	500 x 1980 x 1500	500 x 1980 x 1500	500 x 1980 x 1500	500 x 1980 x 1500
Operating field*	Outdoor temp.	°C	-10 ~ +40	-10 ~ +40	-10 ~ +40	-10 ~ +40
	Max outdoor RH	%	80	80	80	80
	Max indoor temp	°C	40	40	40	40
	Max indoor RH	%	80	80	80	80

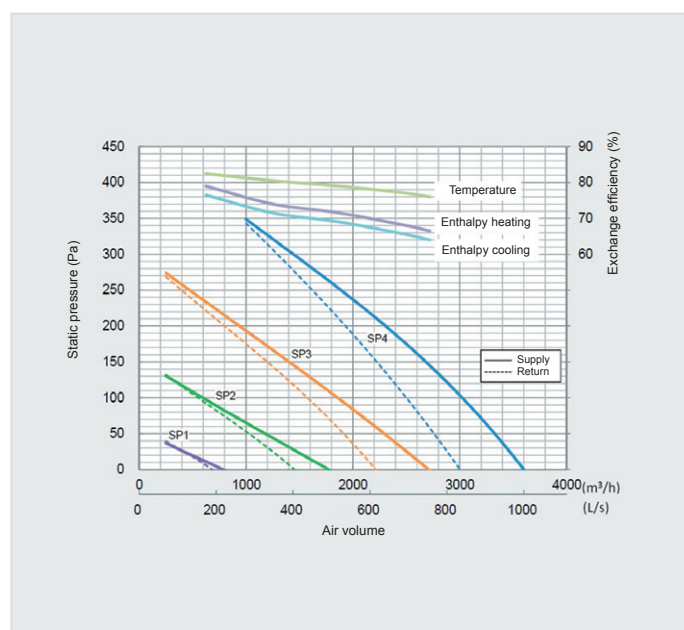

* In case of temperature < -10°C fan will work discontinuously. Lossnay controlled heat generator is recommended in this condition.

GUF-RD(H)4

MONOBLOCK INDOOR UNIT WITH FRESH AIR INTAKE FAN

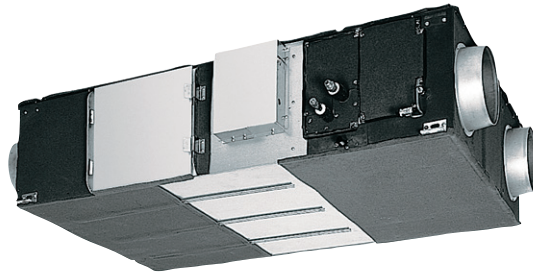

Monoblock indoor unit with fresh air intake fan, stale air exhaust fan, filtration system, Lossnay total heat recovery module, bypass shutter, permeable film humidifier (only for RDH4 version) and direct expansion coil.


Serie RD(H)4


GUF-50RD(H)4

Cooling capacity 5.57 (DX coil: 3.63, Lossnay core: 1.94) kW Heating capacity 6.18 (DX coil: 6.21, Lossnay core: 2.04) kW 500 m³/h 220-240V 50Hz single-phase

GUF-100RD(H)4

Cooling capacity 11.44 (DX coil: 3.63, Lossnay core: 3.85) kW Heating capacity 12.56 (DX coil: 8.30, Lossnay core: 4.26) kW 500 m³/h 220-240V 50Hz single-phase

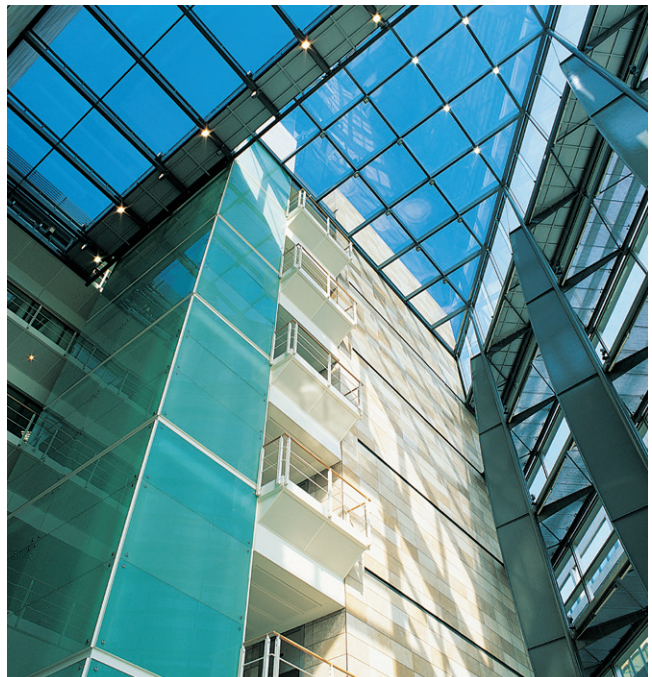

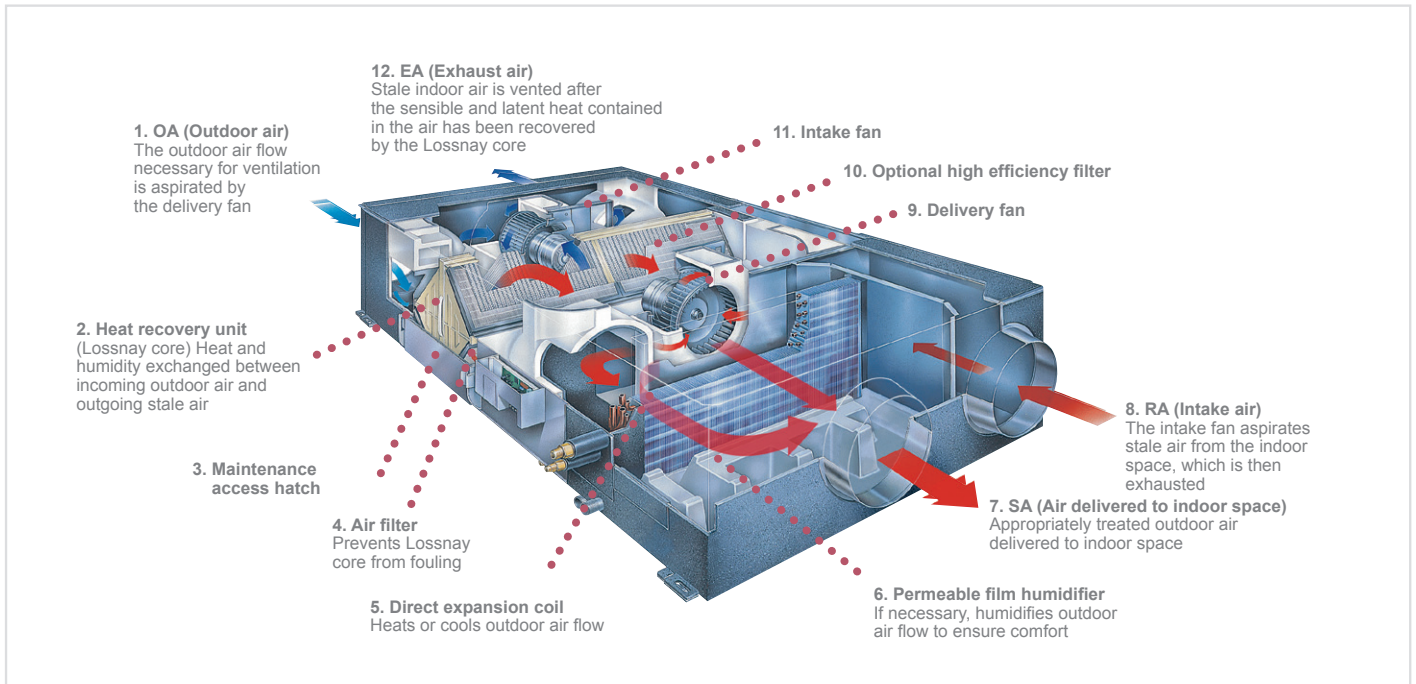

Lossnay technology

The Lossnay total heat recovery module has a cross-flow plate fin structure and heat transfer diaphragms in special treated paper. The excellent thermal transfer properties and permeability to moisture of this special paper ensure the highly efficient exchange of both sensible and latent heat between the two air flows passing through the recovery core. The result is a ventilation system with outstanding characteristics ensuring extremely high levels of comfort and wellbeing in the environment treated, which can also cut operating costs substantially.

The incoming fresh air and outgoing stale air cannot mix within the core. The diaphragm pores, which were already microscopic in previous generations, have been further reduced in size to reduce the possibility of the passage of waterborne soluble gases such as ammonia and hydrogen. To increase heat and moisture exchange, a special treatment is applied to the paper used for the diaphragms. These improvements have increased moisture permeability while reducing permeability to harmful gases, resulting in an overall increase in recovery efficiency and a more effective barrier action against the transfer of these gases.

IN GENERAL
GUF – For optimum indoor air quality
GUF = (Lossnay) + (heating & cooling)


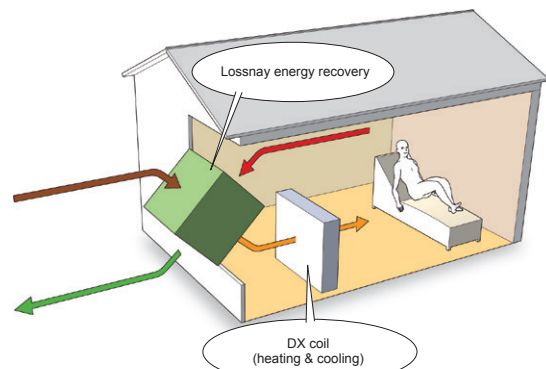


IMAGE OF GUF MODEL

CONSTRUCTION AND OPERATING PRINCIPLE OF LOSSNAY UNIT

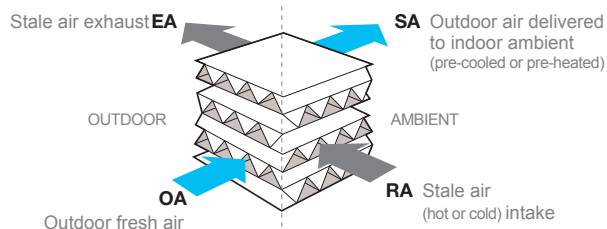

Heat exchanger

A direct expansion coil incorporated in the unit makes it possible to cover approximately 25% of the load of the system with the GUF unit. This also means that the terminal units installed in the indoor space can be smaller. Moreover, as the GUF unit covers the entire thermal load attributable to ventilation, this means that this load and the ambient load can be managed completely separately, simplifying the design process of the installation. The treated air heats the humidifier as it passes through it, further increasing humidification efficiency.

Total comfort

Maintaining the correct humidity levels in an indoor space ensures the ideal conditions for comfort and prevents the unpleasant side-effects typical of an environment with insufficient humidity such as dry eyes and throat.

The evaporation surface area is approximately 8.5 times larger than in a comparably sized natural evaporation humidifier, while performance is 6 times greater.

Humidification - RDH4 version

The innovative permeable film humidification system, which uses a natural evaporation process, is a particularly intelligent solution.

The efficiency with which the air is humidified has been significantly increased by reducing the resistance of the material used. A three-layer film ensures that only the necessary moisture is transferred to the air without any limescale dust release – a problem of certain conventional humidifiers.


Maintaining the correct humidity levels in an indoor space ensures the ideal conditions for comfort and prevents the unpleasant side-effects typical of an environment with insufficient humidity such as dry eyes and throat.

The evaporation surface area is approximately 8.5 times larger than in a comparably sized natural evaporation humidifier, while performance is 6 times greater.

Note: Use a demineraliser if residual total salt levels exceed 100 mg/l.

Increased efficiency of humidification process - RDH4 version

Optimised air flows within the unit together with a water injection system have significantly increased the efficiency of the humidification process. The system also controls the humidity in the outgoing stale air to effectively improve the air quality of the outdoor environment as well. This solution prevents limescale and silica dust from being carried in the air, so purer, less dusty air is vented into the outdoor environment.

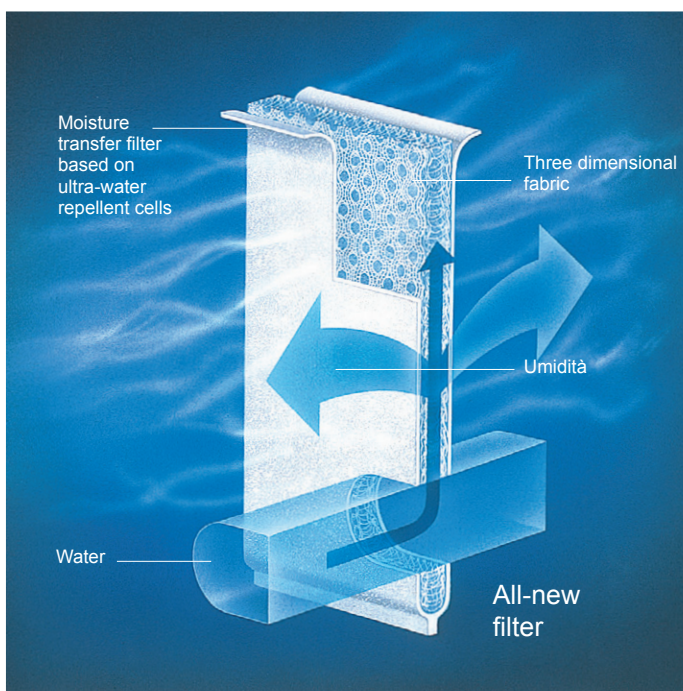

Automatic regulation


GUF ventilation and recovery units may be integrated into a Melans control and regulation system for Mitsubishi Electric air conditioner installations, as they use the same bus used for connecting indoor units.

Automatic free cooling

When the air conditioning is operating in cooling mode and the outdoor temperature is lower than the indoor ambient temperature (as normally occurs at night-time in summer), the GUF indoor unit recognises this condition and automatically bypasses the recovery core. The cooler outdoor air fed into the indoor space contributes to reducing the cooling demand sustained by the system.

Dust suppression

An optional high efficiency filter may be used for up to 3,000 hours while maintaining a filtration efficiency (evaluated with colorimetric testing) of over 65%. The filter may also be fitted in the GUF unit after initial installation and takes up no additional precious space.

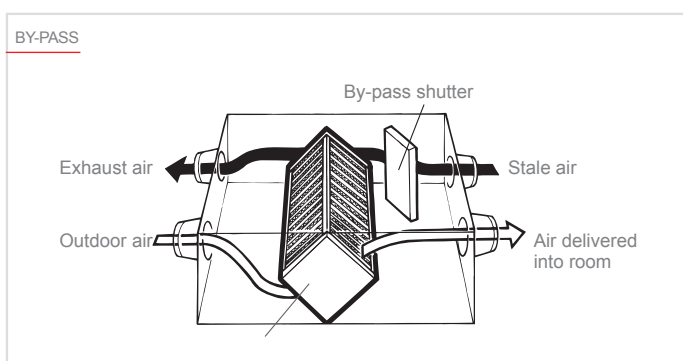


Advantages

- Reduced energy consumption
- Reduced thermal power necessary to treat outdoor air, equating to lower rated power
- Healthier environment
- Quieter operation (noise baffles in inlet and outlet)
- Free Cooling function using exclusively external air
- Humidification with film permeable to water vapour only
- Total air treatment (neutral air returned to outdoor environment)
- Custom temperature and humidity control
- Compact dimensions
- Installable in double ceilings with limited vertical space.

Flexible installation

The positions of air duct connections may be changed as needed to cater for different installation requirements.

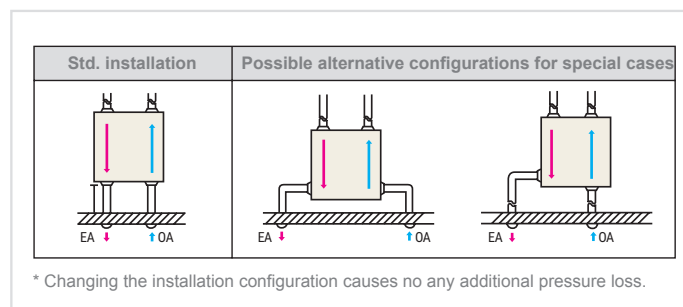

Technical specifications

MODEL			GUF-50RDH4		GUF-100RDH4		GUF-50RD4		GUF-100RD4		
Power supply			1-phase 220-240V 50Hz								
Communication system			In serie tramite rete M-NET: Mitsubishi Electric Air Conditioners Network System								
Lossnay	Mode		Air to Air Total heat recovery system								
	Material		Partition, Cross-flow structure, Special preserved paper-plate.								
Cooling capacity**		kW	5,57	(1,94)	11,4	(4,12)	5,57	(1,94)	11,44	(4,12)	
	Power input	W	235-265		480-505		235-265		480-505		
	Curren	A	1,15		2,2		1,15		2,2		
Heating capacity**		kW	6,21	(2,04)	12,56	(4,26)	6,21	(2,04)	12,56	(4,26)	
	Power input	W	235-265		480-505		235-265		480-505		
	Current	A	1,15		2,2		1,15		2,2		
Temperature heat recovery efficiency		%	77,5/80		79,5/81,5		77,5/80		79,5/81,5		
Total heat recovery efficiency*2	Heating	%	68/71		71/74		68/71		71/74		
	Cooling	%	65/67		69/71		65/67		69/71		
Capacity index			P32		P63		P32		P63		
Humidifier capacity		kg/h	2,7		5,4		-		-		
Fan	Type x qty		SA: Centrifugal fan (Sirocco FAN) x 1 - EA: Centrifugal fan (Sirocco FAN) x 1								
	Static pressure	Pa	125		135		140		140		
		mmH ₂	12,7		13,8		14,3		14,3		
	Motor		Totally enclosed capacitor permanent split-phase induction motor, 4 poles, 2 units								
	Flow rate (High speed)	m³/h	500		1000		500		1000		
SPL (Low-High)		dB(A)	33,5-34,5		38-39		33,5-34,5		38-39		
Ref. Piping diameter	Liquid	mm(in.)	Ø6,35(Ø1/4)		Ø9,52(Ø3/8)		Ø6,35(Ø1/4)		Ø9,52(Ø3/8)		
	Gas	mm(in.)	Ø12,7(Ø1/2)		Ø15,88(Ø5/8)		Ø12,7(Ø1/2)		Ø15,88(Ø5/8)		

*1 () value from Lossnay heat recovery.

*2 High/Low speed values.

Control Systems

Remote control

PAC-YT52CRA Design Remote Control	258
PAR-41MAA Deluxe Remote Control	259
PAR-CT01MA Prisma Remote Control	260
PAR-U02MEDA Advanced Remote Control	262

Wireless remote control

PAR-FL32MA Wireless Remote Control	264
PAR-SL101A-E Wireless Remote Control	265

Remote control

PZ-62DR-EB Lossnay Remote Control	266
PAR-W21MAA / PAR W31MAA Ecodan Remote Control	268

Centralized control

AT-50B System Centralized Control	269
AE-200E 3D Touch Controller / Web Server Centralized Control	270
EW-50 3D Blind Controller / Web Server Centralized Control	272
CHARGE "Charge" System for Centralized Web Server Controls	273



Interface for hotel simplified application

MELCOTEL Integrated Solution for Hotels 274

Remote monitoring and control system

3D TABLET CONTROLLER Wi-Fi Remote Management System 280

MELCLOUD CITY MULTI

Cloud-based remote management and supervisor system 282

REMOTE MONITORING INTERFACE

Cloud Remote Management System 284

External signal integration

ADVANCED HVAC CONTROLLER External Signal Integration 286

LMAP04 B.M.S. Interface for Lonworks® Networks 287

XML B.M.S. Interface for Ethernet Networks 288

ME-AC-MBS-100 B.M.S. Interface for Modbus® Networks 289

ME-AC-KNX-100 B.M.S. Interface for Knx® Networks 290

BACnet® PIN CODE B.M.S. Interface for Bacnet® Networks 291



Control Systems



PAC-YT52CRA

DESIGN REMOTE CONTROL



PAR-FL32MA

PAR-SL101A-E

WIRELESS REMOTE CONTROL



PAR-41MAA NEW

DELUXE REMOTE CONTROL



PZ-62DR-EB NEW

LOSSNAY REMOTE CONTROL



PAR-CT01MA

PRISMA REMOTE CONTROL



PAR-W21MAA

PAR-W31MAA

ECODAN REMOTE CONTROL



PAR-U02MEDA

ADVANCED REMOTE CONTROL



AT-50B

SYSTEM CENTRALIZED CONTROL



AE-200E

3D TOUCH Controller
WEB SERVER CENTRALIZED
CONTROL



EW-50

3D BLIND Controller
WEB SERVER CENTRALIZED
CONTROL



3D TABLET CONTROLLER

WI-FI REMOTE MANAGEMENT
SYSTEM



MELCloud®
CITY MULTI

MELCloud CITY MULTI

CLOUD REMOTE MANAGEMENT
SYSTEM



MELCOTEL

INTERFACE FOR HOTEL
SIMPLIFIED
APPLICATION



RMI

Remote Monitoring Interface
CLOUD REMOTE MANAGEMENT
SYSTEM



M-NET-AHC- 24VDC

INTEGRATION OF EXTERNAL SIGNALS




B.M.S. INTERFACE

B.M.S. INTEGRATION

PAC-YT52CRA

DESIGN REMOTE CONTROL

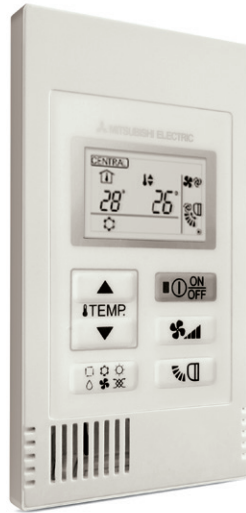


PAC-YT52CRA Design remote control

- Display with white backlighting.
- Simple wall-mounted installation.
- Easy and intuitive with icon-based interface.
- Operating mode selection function.
- Vane position selection function (for compatible indoor units).
- Usable to manage 1 group of up to 16 indoor units.
- Simple connection with single non-polarised two-core wire.
- **MA** self-addressing technology.


- Suitable for all types of indoor unit.
- Recommended for hotels and public spaces, as ambient air temperature display can be disabled.
- Integrated temperature sensor usable instead of indoor unit sensor.
- Configurable temperature range settable from local keypad.

Key Technologies

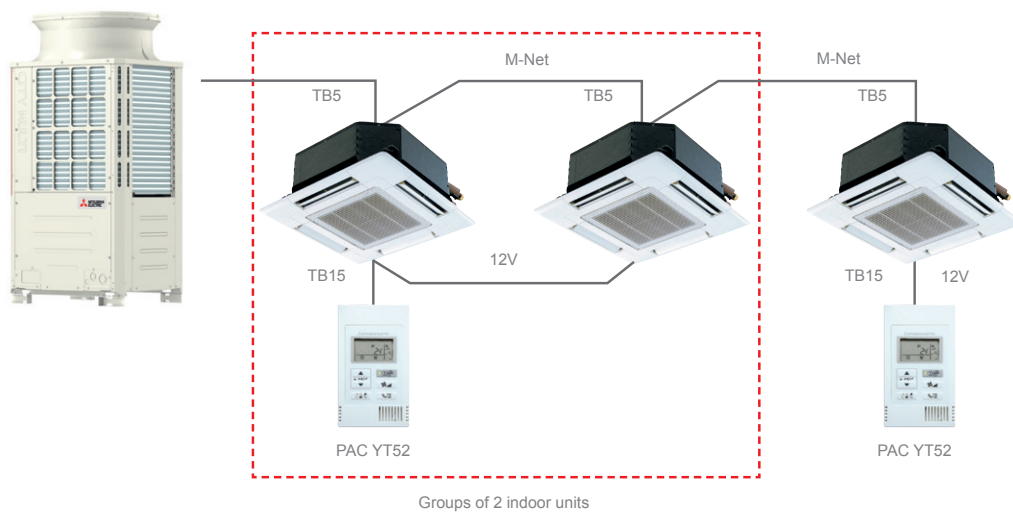

PAR-41MAA NEW

DELUXE REMOTE CONTROL UNIT

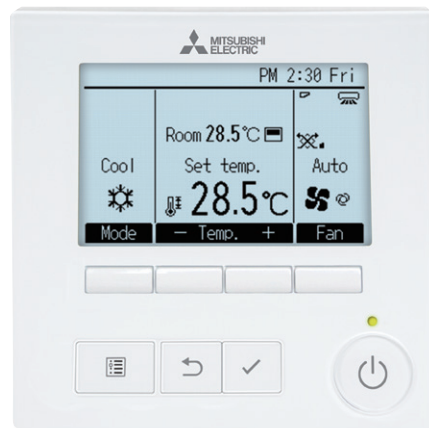


PAR-41MAA Deluxe remote control unit

- Display with white (factory setting) or black backlighting and adjustable contrast.
- Simple wall-mounted installation.
- Night Set-back function for setting minimum winter temperature or maximum summer temperature in temperature maintenance mode.
- Effective static overpressure selection function for ducted indoor units (PEFY-P VMHS only).
- Internal weekly timer function and simplified internal timers (Auto-off, etc.).
- Usable to manage 1 group of up to 16 indoor units.
- Easy and intuitive, with icon based graphic interface, direct control buttons and function buttons.
- Simple connection with single non-polarised two-core wire.
- **MA** self-addressing technology.

- Suitable for all types of indoor unit, including GUF.
- Integrated temperature sensor usable instead of indoor unit sensor.
- Configurable temperature range settable from local keypad.
- **View and set setpoint temperatures in 0.5°C increments.**
- Supports 3D i-see sensor functions
- **14 languages available** (English, French, Spanish, German, Italian, Dutch, Portuguese, Greek, Russian, Czech, Turkish, Polish, Hungarian, Swedish).
- Draft reduction *
"Close" has been added to the manual vane angle selection.
The air outlet can be closed to reduce drafts from the air conditioner.

Key Technologies

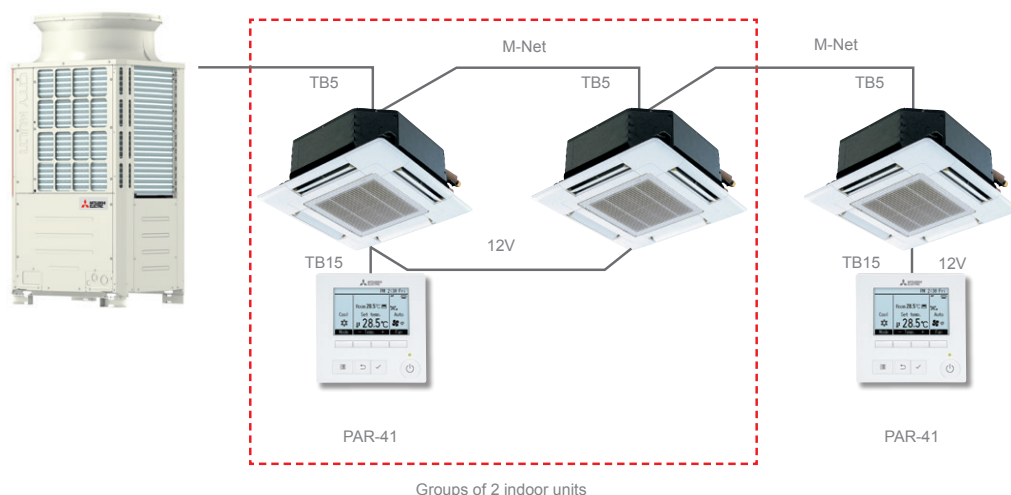

PAR-CT01MA

PRISMA REMOTE CONTROL



PAR-CT01MAA-SB



PAR-CT01MAA-PB

PAR-CT01MA prisma remote control

- Full color touch panel display
- 180 color patterns can be selected for control parameters or background on the display
- Easy wall mounted installation
- Night Set-back function for setting minimum winter temperature or maximum summer temperature in temperature maintenance mode.
- Effective static overpressure selection function for ducted indoor units (PEFY-P VMHS only).
- Internal weekly timer function and simplified internal timers (Auto-off, etc.).
- Usable to manage 1 group of up to 16 indoor units.
- Easy and intuitive, with icon based graphic interface, direct control buttons and function buttons.
- Simple connection with single non-polarised two-core wire.
- MA self-addressing technology.
- Suitable for all types of indoor unit, including GUF.
- Recommended for groups with only one indoor unit.
- Integrated temperature sensor usable instead of indoor unit sensor.
- Configurable temperature range settable from local keypad.
- **View and set setpoint temperatures in 0.5°C increments.**
- **Supports 3D i-see sensor functions for 60 x 60 PLFY-P VFM-E1 cassette and 90 x 90 PLFY-P(M) VEM-E cassette**

Multiple color pattern

180 MULTIPLE COLOR PATTERNS



Key Technologies

				
---	--	--	--	--

Multilingual support

The smartphone app can be displayed in the language that the guest's smartphone is set to.

Large color backlit touch display

New PRISMA remote control is equipped by 3.5 inch/HVGA Full Color LCD Touch screen,



Display customization

Customized display, color on parameter and background, editable parameter, logo image on the initial display.


Hotel setting

Simple operation panel is liked by users, especially in hotels. It is available to display only ON/OFF, set temp., fan speed.

Bluetooth connection



PAR-CT01MA remote control is equipped with Low Energy Bluetooth connection. Thanks to two dedicated Apps (one for installers and one for users) it is possible to connect your smartphone or tablet the the remote control. User App allows to control the air conditioning system connected to PAR-CT, with a simple and intuitive interface.

Installer App allows to easily configure the remote control during maintenance and commissioning. Thanks to this App it is possible to save a settings pattern on mobile device and easily transfer it to the remote control, shortening service and commissioning timing.

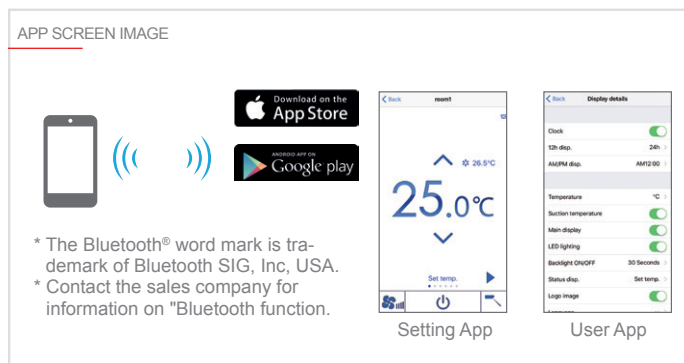

Logo image customization

Logo image can be displayed on the initial screen.

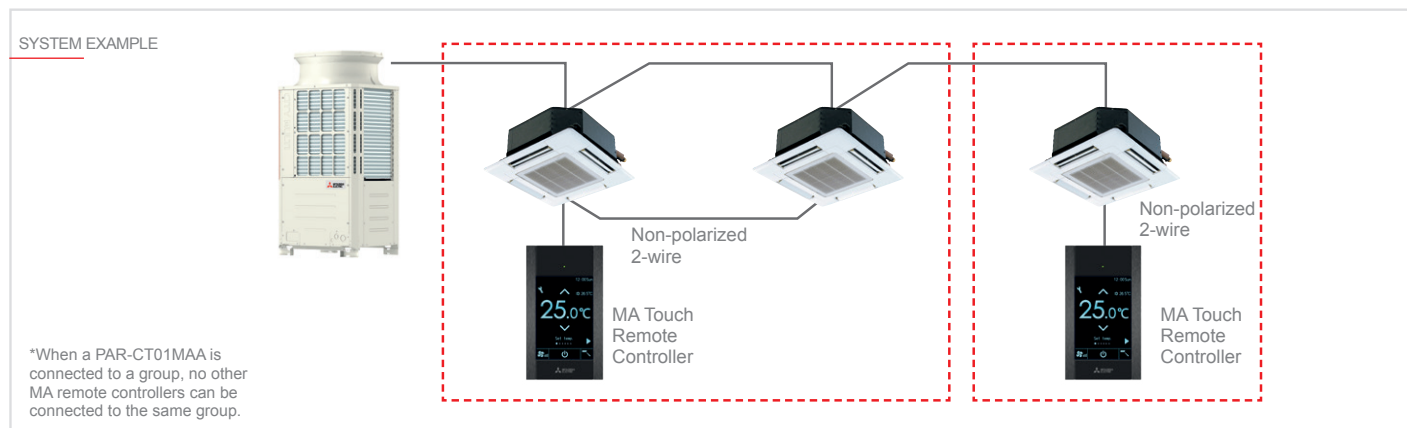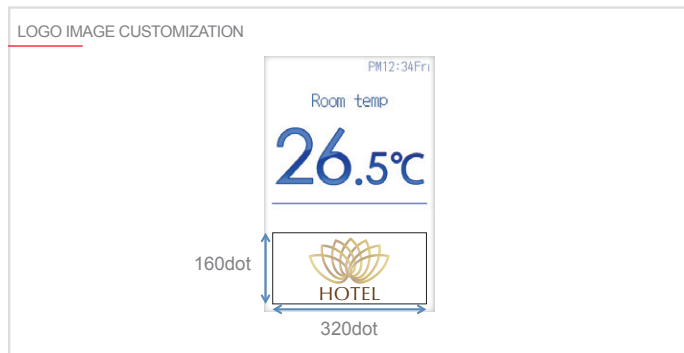

PAR-U02MEDA

ADVANCED REMOTE CONTROL




PAR-U02MEDA advanced remote control

The Mitsubishi Electric Advanced remote control may be used to control up to 16 indoor units. While advanced, this controller also offers basic functions such as monitoring and controlling the status of the units in the system, and a weekly hour timer. Four integrated sensors (temperature, humidity, occupancy and light) allow a series of advanced adjustment and control functions. For example, the occupancy sensor can be used to save energy by configuring different modes based on the occupied/vacant status of each room.

- Large monochrome LCD touch screen display with white backlighting.
- Usable to manage 1 group of up to 16 indoor units.
- **Integrated temperature, humidity, occupancy and light sensors.**
- SMART energy saving and comfort functions.

- Contextual colour LED indicating operating status of indoor units.
- **View and set setpoint temperatures in 0.5°C increments**
- **Dual Setpoint** function.
- Internal weekly timer.
- **ME M-Net** addressing technology.
- Extended setting ranges for setpoints (Cool: 19-35°C; Heat: 5-28°C).
- New functions for use in conjunction with AHC Programmable Controller (PLC M-Net), for creating operating strategies with generic devices.


Key Technologies

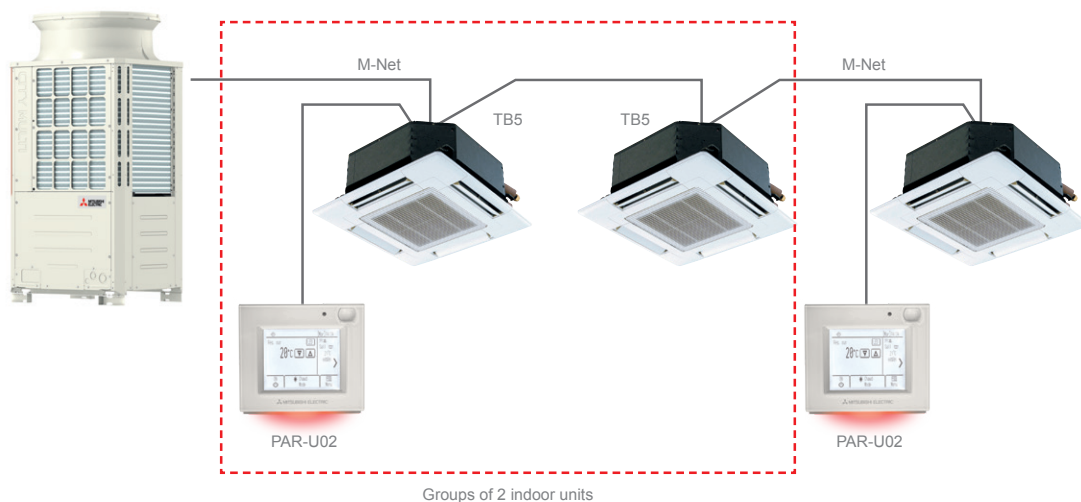

Occupancy sensor

The occupancy sensor detects if a room is vacant and enables automatic control of the indoor units to implement energy saving strategies based on the effective occupancy of each room. The occupancy sensor enables the following energy saving functions:

- Switch indoor units ON/OFF based on occupied/vacant state of room;
- Fan speed control;
- Switch indoor unit from Thermo ON to Thermo OFF state;
- Configure temperature deviation based on occupied/vacant status.

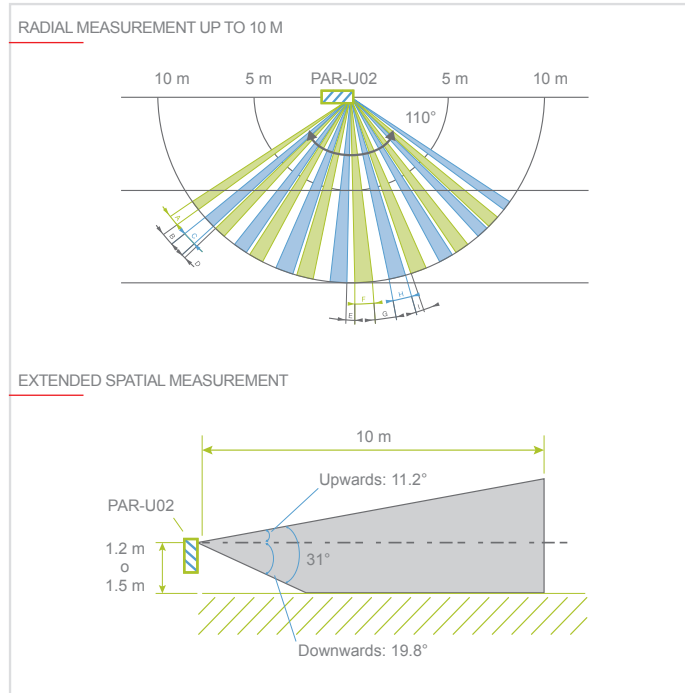


Light sensor

The light sensor measures the light levels in the conditioned room and adjusts the brightness of the remote control display accordingly.

Bright/dark thresholds may be set directly from the remote control over an extended luminosity range (1 to 65535 lx).

The light sensor is also used in low light conditions to confirm the occupied/vacant status of the room.

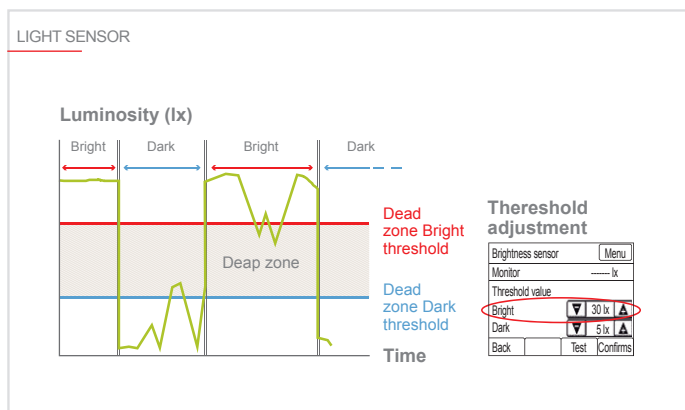

Temperature and humidity sensor

The integrated temperature and humidity sensor may be used to increase perceived comfort levels,



while the ability to adjust the temperature with a precision of 0.5°C gives the user an even greater sense of control. The relative humidity sensor, combined with the ability to interlock the remote control with a programmable AHC controller, makes it possible to control humidity with external devices connected to the system via the AHC.

LED status indicator

The LED status indicator indicates the status of active functions on the remote control. Each colour is associated with a status or function:

e.g. Red=Heating, Blue=Cooling etc.

The LED indicator may be temporarily or permanently disabled.

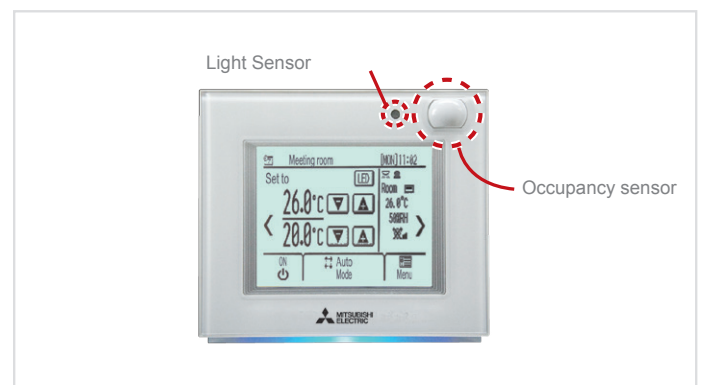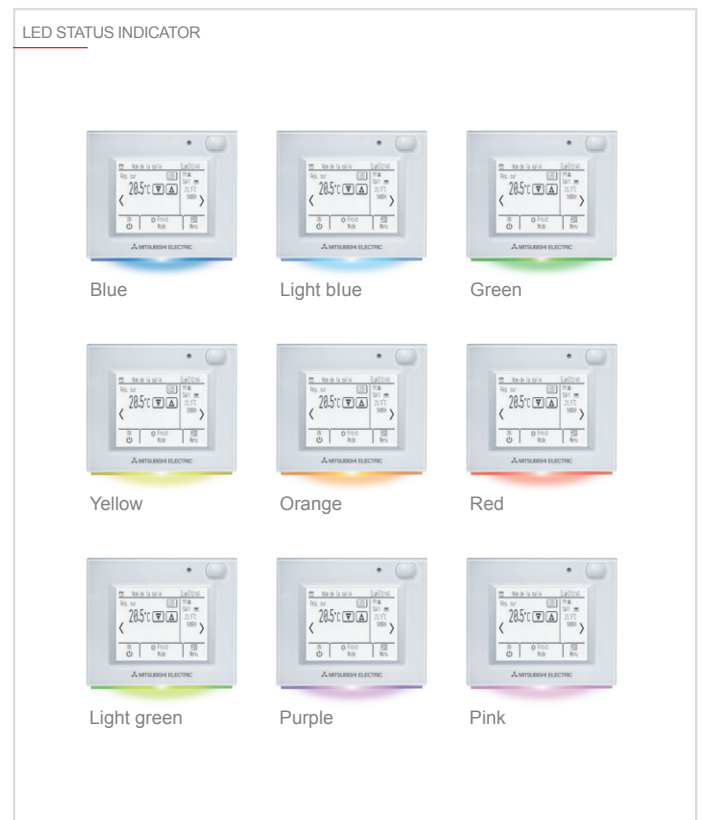

PAR-FL32MA

WIRELESS REMOTE CONTROL



PAR-FL32MA




PAR-FA32MA



PAR-SE9FA

PAR-FL32MA wireless remote control

- Usable to manage 1 group of up to 16 indoor units.
- Easy and intuitive with icon-based interface.
- Receiver connected simply with single non-polarised two-core wire.
- **MA** self-addressing technology.
- Suitable for all types of indoor unit.
- Recommended for groups with only one indoor unit.
- Generic receiver for all indoor unit types: PAR-FA32MA.
- Specific corner receiver for 4-way PLFY-P(M) VEM-E cassette units: PAR-SE9FA.

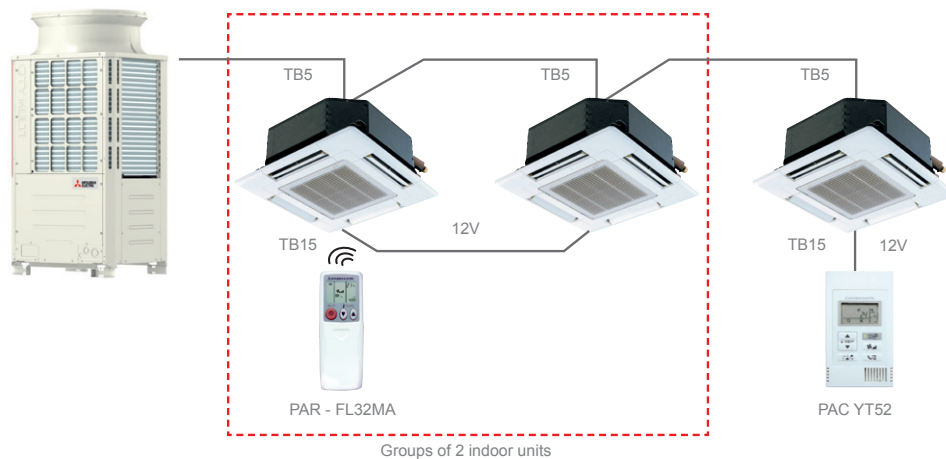

Compatibility table

	Wireless signal receiver	Wireless remote control
PMFY-P VBM PLFY-P VLMD PEFY-P VMR/VMH PEFY-P VMS1 PEFY-M VMA PEFY-P VMA3 PEFY-P VMHS PFFY-P VLEM/VKM/VCM PCFY-P*VKM	PAR-FA32MA	PAR-FL32MA
PLFY-P/M VEM PLFY-P VFM-E1	PAR-FA32MA	PAR-FL32MA

Compatibility table

	Wireless signal receiver	Wireless remote control
PKFY-P VLM PKFY-P VKM	Built in	PAR-FL32MA

PAR-SL101A-E


WIRELESS REMOTE CONTROL



Wireless remote control PAR-SL101A-E

- Compatible with PLFY-VFM and PLFY-VEM
- **Backlighting**
- Group with up to 16 units
- **Direct/Indirect function** with corner PAC-SF1ME-E (3D i-see sensor)
- **Single vane control**
- Temperature view and setting 0,5°C
- **3D i-see sensor compatible**

Key Technologies

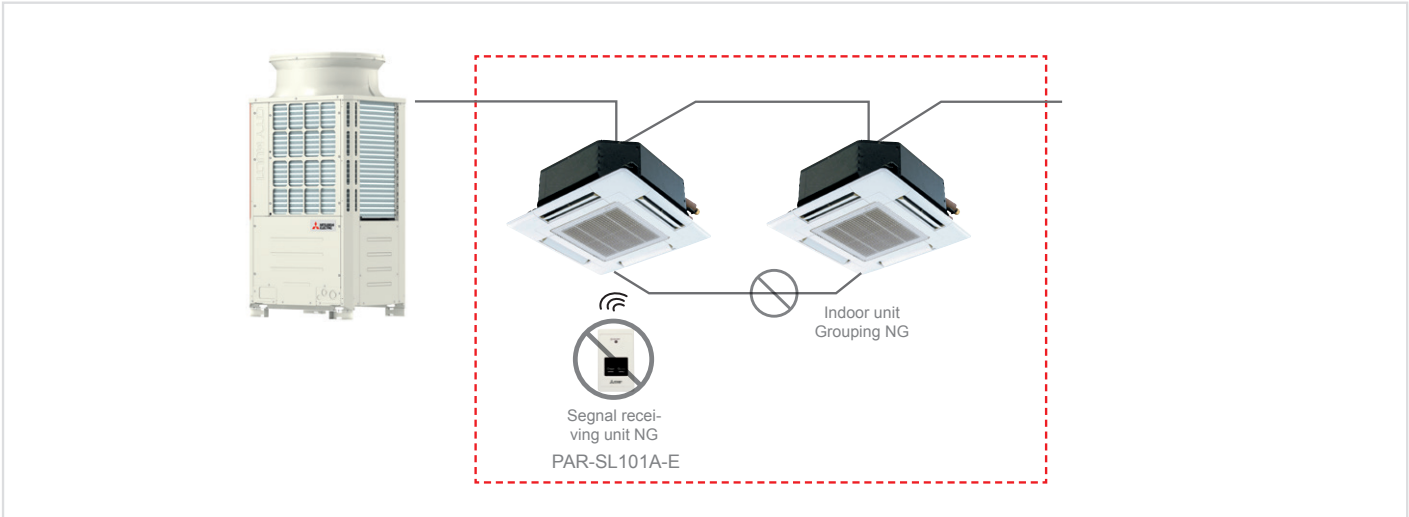

Compatibility table		
	Wireless signal receiver	Wireless remote control
PLFY-P/M VEM-E	PAR-SE9FA-E	PAR-SL101A-E
PLFY-P*VFM-E1	SLP-2FAL	

PZ-62DR-EB

LOSSNAY REMOTE CONTROL




PZ-62DR-EB remote control for Lossnay

- Specific remote control for Lossnay heat recovery units.
- Usable to manage one group of up to 15 Lossnay units.
- Easy and intuitive with icon-based interface.
- Simple connection with single non-polarised two-core wire.
- Internal weekly timer.
- Custom ventilation strategies for mode switching (Auto/recovery/bypass).
- Night purge function for active night-time ventilation in summer.
- On-display service messages.
- Backlit LCD screen.
- Energy management

3 Languages are added
Greek, Slovenian, Denmark

Compatibility
PZ-62DR-EB are compatible with both RVX and RVS.

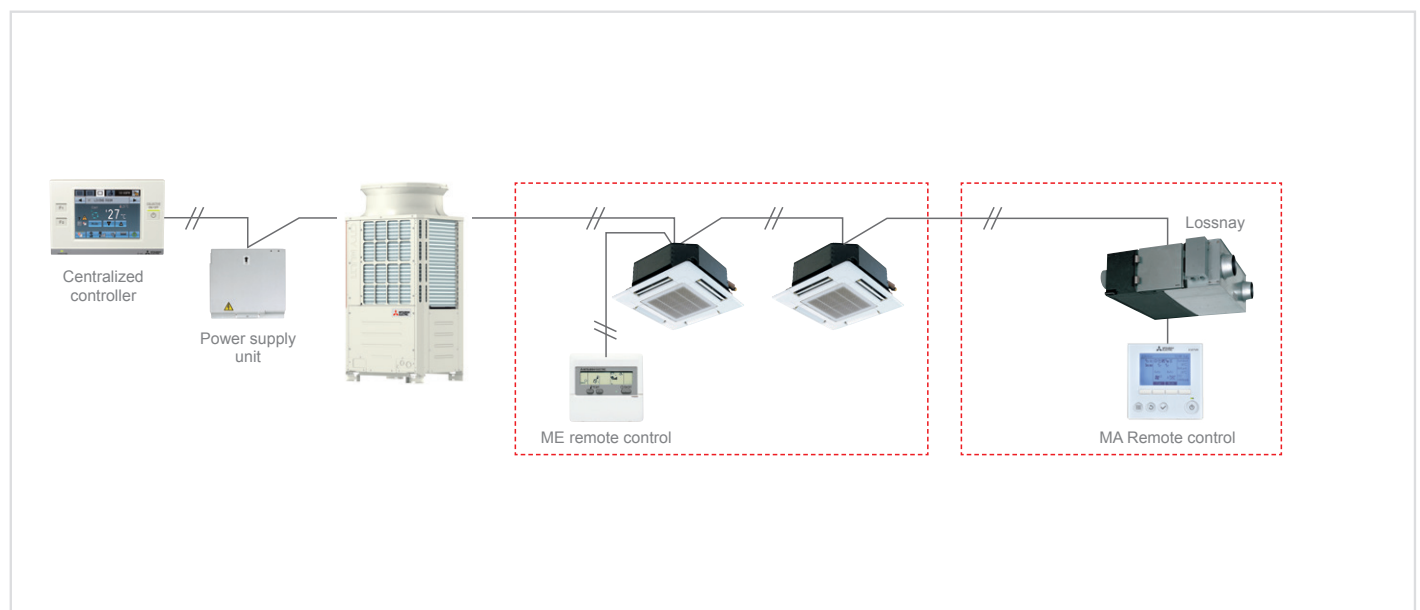


*Not compatible with LGF

Dedicated PZ-62DR-EB wired controller

The new PZ-62DR-EB controller can be used to control all the functions of the LGH-RVS unit.

If the PZ-70CSW-E (optional) or PZ-70CSB-E (optional) CO₂ sensor is used, the carbon dioxide concentration in the room can be displayed on the control unit's display.

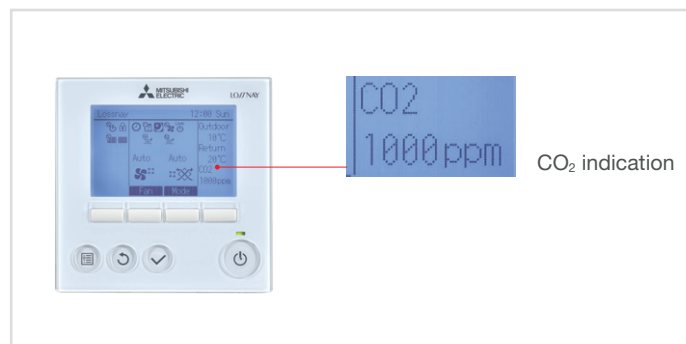

Function	PZ-62DR-E
Fan speed selection	4 fan speeds and Auto (Auto is available when using a CO2 sensor)
Control with a CO2 sensor	Yes (Fan speed automatically changes from 25% to 100% depending on the CO2 concentration*)
Ventilation mode selection	Energy recovery/Bypass/Auto
Night-purge	Yes
Function setting from remote controller	Yes
Bypass temp. free setting	Yes
Multi-stage air flow control	Yes (Both supply and exhaust fan speeds can be set separately from 25% to 100% in 5% pitches)
ON/OFF timer	Yes
Auto-off timer	Yes
Weekly timer	Yes
Fan speed timer	Yes
Operation restrictions (ON/OFF, ventilation mode, fan speed)	Yes
Operation restrictions (fan speed skip setting)	Yes
Screen contrast adjustment	Yes
Language selection	Yes
CO2 concentration indication	Yes (available when using a CO2 sensor)
Filter cleaning sign	Yes (maintenance interval can be changed)
Error indication	Yes (displays model name, serial number, contact information if they are input)
Error history	Yes
OA/RA/SA temp. display	Yes

* When using a CO₂ sensor. Upper and lower limits may be changed.

PAR-W21MAA / PAR-W31MAA

ECODAN REMOTE CONTROL



PAR-W21MAA / PAR-W31MAA remote control for hydronic modules and HWHP units / E-SERIES

- (PAR-W21MAA) Remote control for hydronic modules, HWS and ATW units and Hot Water Heat Pump package systems (HWHP) CAHV&CRHV.
- Usable to manage 1 group of up to 16 indoor units.
- Easy and intuitive with icon-based interface.
- Simple connection with single non-polarised two-core wire.
- MA self-addressing technology.
- Operating mode selection (Heating, Heating ECO, Hot water, etc.).
- Internal weekly timer.
- Customisable water temperature ranges for switching operating mode from local keypad.
- On-display service messages.
- PAR-W31MAA specific for E-SERIES



AT-50B


SYSTEM CONTROLLER



AT-50B system controller

- **5" backlit LCD touch screen.**
- Usable to manage 50 groups of up to 50 indoor units.
- Individual or collective group control, with groups displayed in grid, list or group format.
- **Dual-Setpoint** function.
- **View and set setpoint temperatures in 0.5°C increments.**
- Two weekly timers (for seasonal switching) and one daily timer.
- Simple connection with single non-polarised two-core wire.
- ME M-Net addressing technology.
- Two function buttons programmable to access any of a choice of functions (Night Set-back, weekly hour timer setting, switch operating mode, adjustable temperature range restriction, local restrictions).
- Recommended for controlling a single system.

Key Technologies

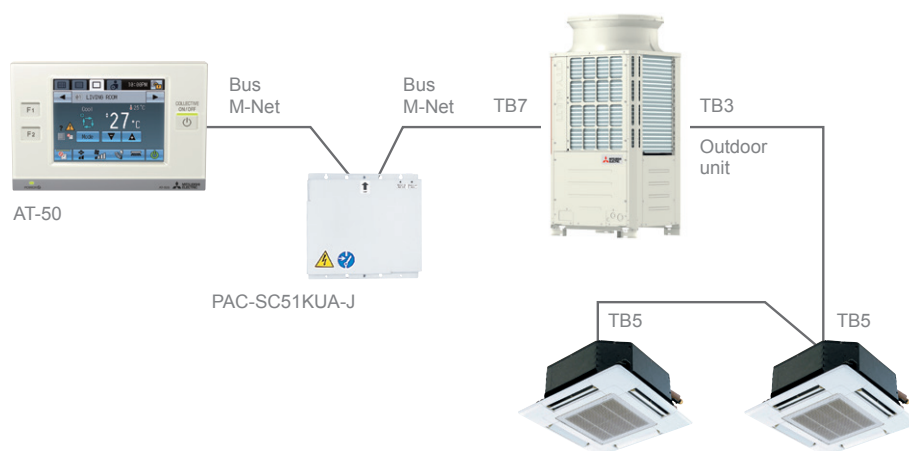

AE-200E

WEB SERVER CENTRALIZED CONTROLLER



3D TOUCH controller

- Generously sized backlit 10.4" SVGA touch screen with graphic layout display function.
- Built-in 240 V AC 50 / 60 Hz power supply.
- Standalone configuration: management of up to 50 indoor units.
- Extended configuration: management of up to 200 indoor units (with 3 expansion controllers EW-50).
- Individual or collective control of groups, blocks or zones.
- Ethernet interface for connection to BMS supervisor systems.
- Integrated WEB server software for management using Internet Explorer®.
- Integrated 2 GB SD memory card for storing system data.
- Direct management of 4 impulse meters with no external interface.
- Power consumption data for billing downloadable via internet connection.
- Complete support for all advanced RMI platform functions for energy consumption monitoring and for multi-installation and multi-user management.
- Temperature setpoints settable and viewable with a precision of 0.5°C.
- Energy saving functions: Maintenance temperature, Sliding temperature, Optimised start, Dual Setpoint.
- M-Net interfacing with Ecodan package Hot Water Heat Pump systems (CAHV and CRHV).
- **Allows direct connection to BMS BACnet NEW**

Superior management, functional and monitoring capabilities with new Mitsubishi Electric controller systems


The 3D TOUCH Controller supports the management, operational and monitoring capabilities of all the new functions offered by the new **ADVANCED remote control**.

Information concerning **occupancy, light levels**, relative humidity in the **indoor space and dual setpoints** is accessible directly from the display and via the WEB.




Key Technologies

				
---	--	--	--	--

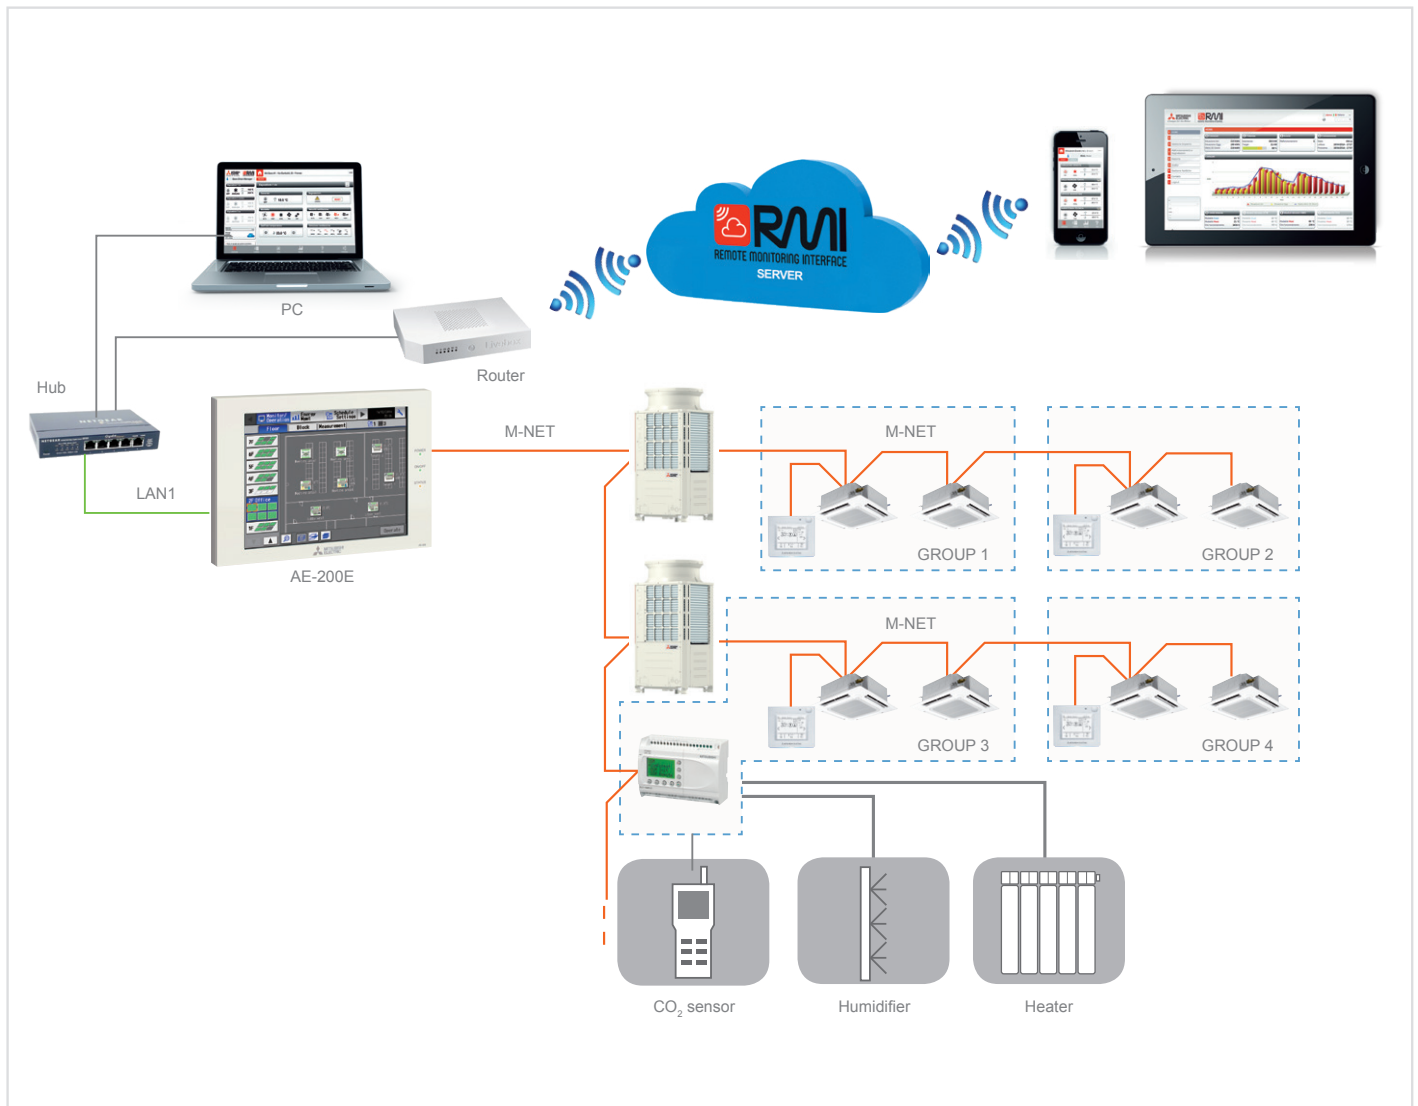

Power and flexibility in a compact device

While measuring practically the same as the previous AG-150, the new 3D TOUCH Controller WEB Server centralized controller offers a larger screen area, greater processing power and expandable flexibility for future applications.

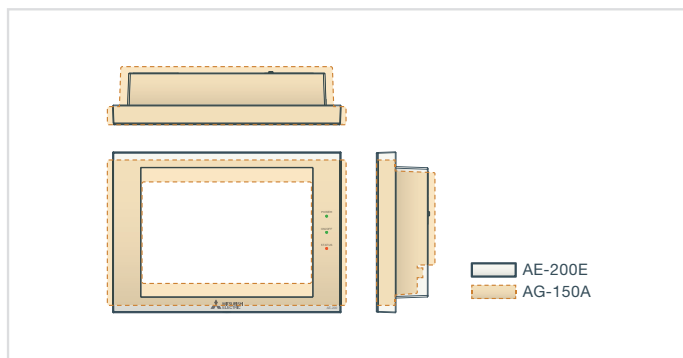

RMI Ready



The **3D TOUCH Controller WEB Server** centralized controller performs the crucial role of acquiring and monitoring data via the M-Net data transmission bus linking all the components of the VRF CITY MULTI, Mr. Slim or Residential system.

A router (available as wired ADSL or 3G Mobile versions) creates a secure, protected communication channel with the RMI Server. The modular flexibility of the RMI Server makes it possible to store enormous volumes of data, which is acquired, processed and archived for access from portable devices.

This infrastructural complexity, combined with superior processing, management and security capabilities, is encapsulated in an extremely user friendly concept, to help users optimise the energy usage of their systems.

EW-50

WEB SERVER CENTRALIZED CONTROLLER




3D blind controller

- “Black Box” version (no display).
- Compact dimensions (external 230V AC power supply).
- Usable to manage 50 groups for a total of up to 50 indoor units.
- Individual or collective group control.
- Ethernet interface for connection to supervisor systems.
- Integrated WEB server software for management using Internet Explorer®.
- Simplified connection, with single non-polarised two-core wire, using ME technology.
- Integrated 2 GB SD memory card for storing system data.
- Direct management of 4 impulse meters with no external interface.

- Status indicator LED indicating data transmission status and/or errors.
- Consumption data for billing downloadable via internet connection.
- A wide choice of energy saving functions offered as standard, with additional optional functions accessible with PIN code licenses.
- Complete support for all advanced RMI platform functions for energy consumption monitoring and for multi-installation and multi-user management.
- **Expansion controller for AE-200.**
- Allows direct connection to BMS BACnet NEW

Key Technologies

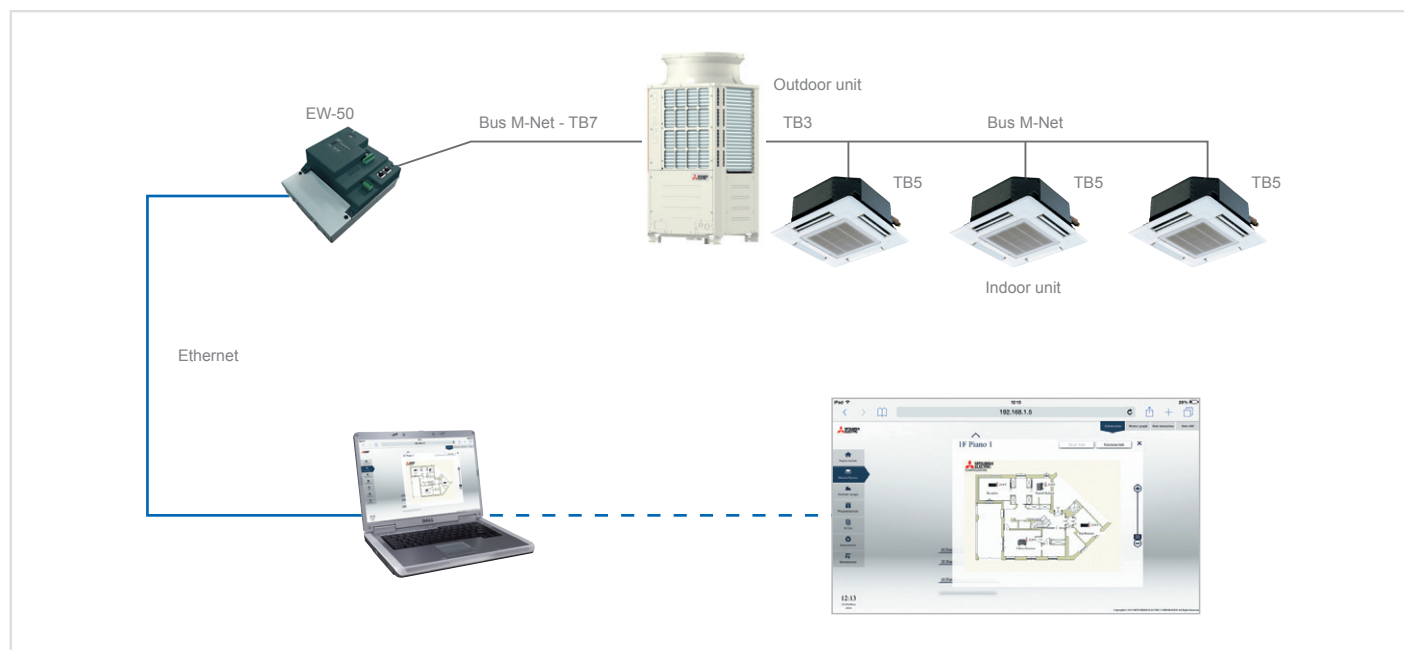

CHARGE

"CHARGE" SYSTEM FOR CENTRALIZED WEB SERVER CONTROLS


Apportioning system by web server centralized controllers

The Charge consumption monitoring and apportioning system may be used to meter the consumption of electric power, thermal power and water for air conditioning, air and/or water heating and domestic hot water production with a Mitsubishi Electric VRF CITY MULTI system, and calculate individual usage values.

The AE-200 and EW-50 CHARGE systems use proprietary Mitsubishi Electric calculation and apportioning methods. This consumption apportioning method indicates the consumption parameters of each user

as percentages of the total consumption of the system. Consumption values, as percentages and kWh, may be calculated separately for:

- Outdoor Units
- Indoor Units
- Ecodan HWS Hydronic Modules
- Ecodan ATW Hydronic Modules

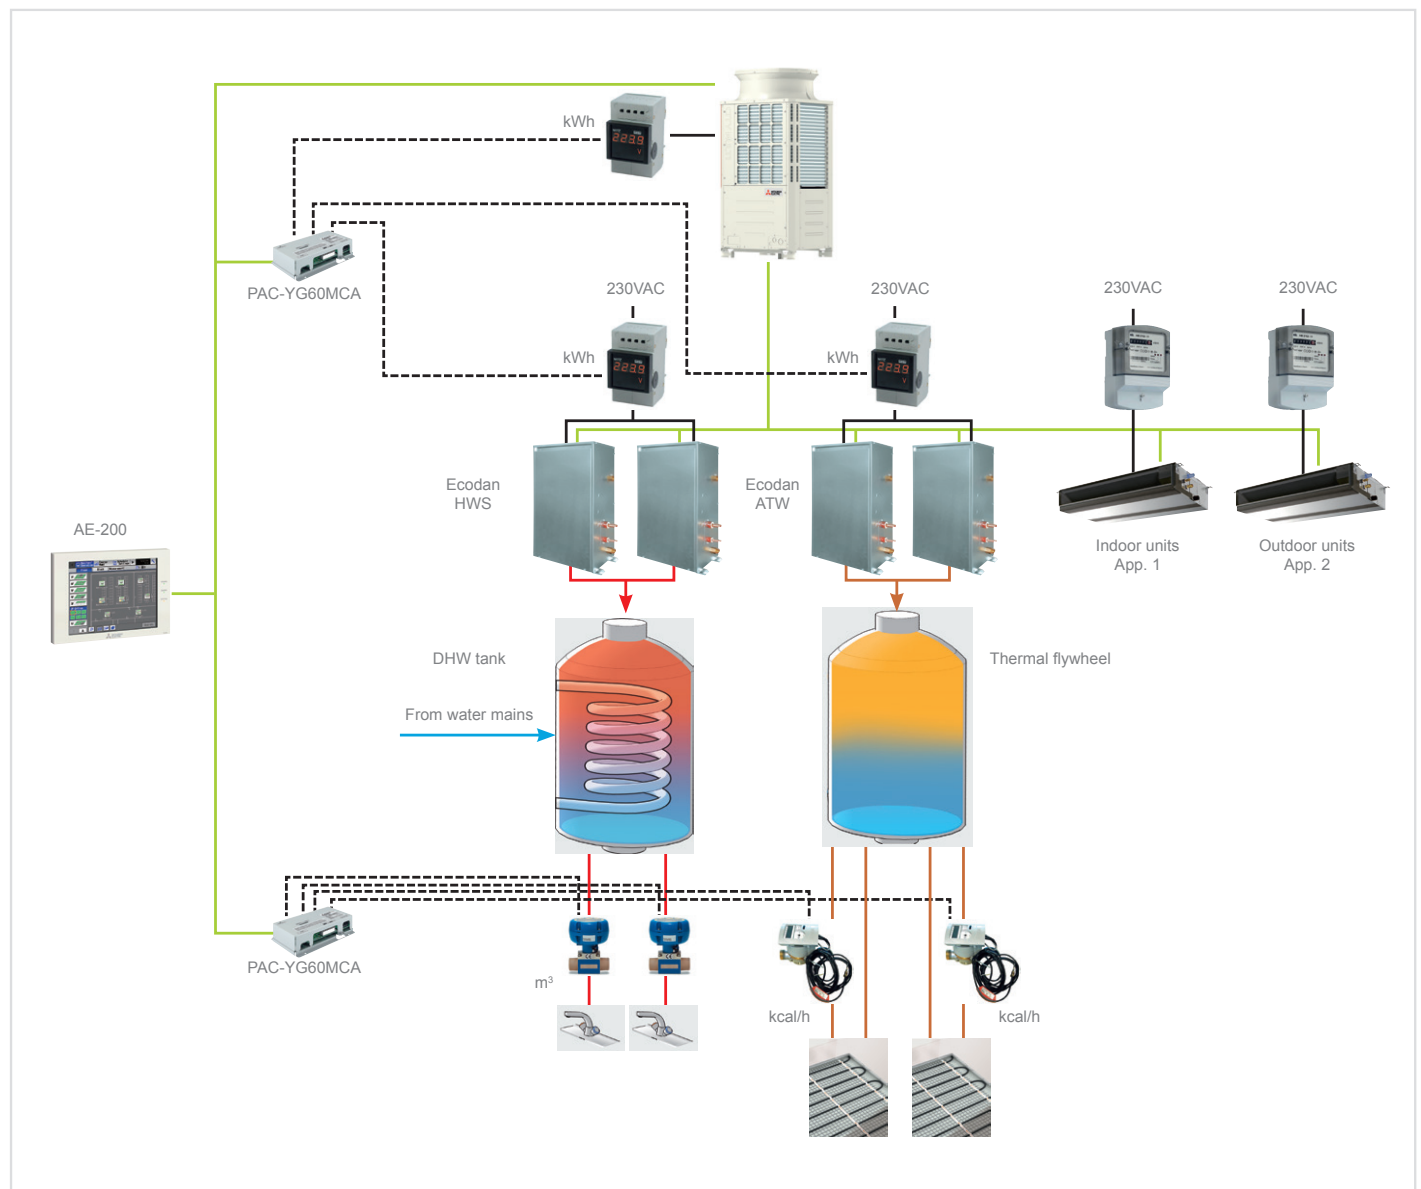

MELCOTEL


INTERFACE FOR HOTEL SIMPLIFIED APPLICATION



MELCOTEL

- Integrated solution interface for small-medium hotels;
- Centralized solution;
- Higher level of control and therefore greater energy saving and a substantial reduction in running costs;
- Key Card contact and Window contact management (1 PAC-SE55RA for each indoor unit is required)
- It works in combination with 1 AE-200 and up to 3 more Web Server Centralized Controllers AE-200/EW-50 (up to 200 Indoor Units).

HOTEL ROOM MANAGEMENT

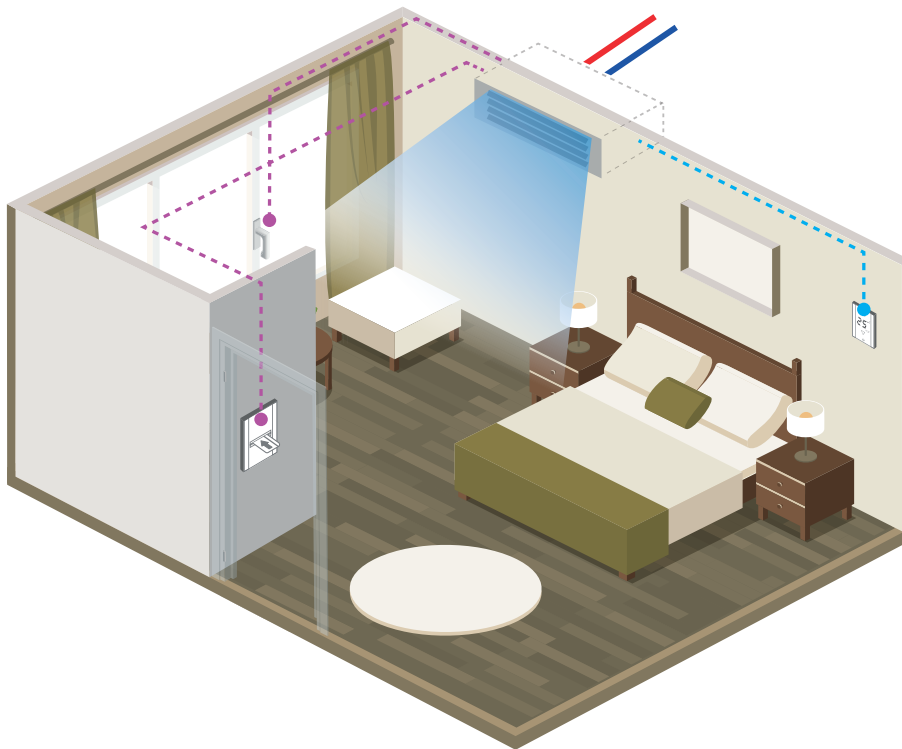


Key card contact and window contact management

The Melcotel Interface allows a hotel to have more accurate control over its air conditioning and can be used to control and monitor up to 200 bedrooms.

KEY CARD CONTACT MANAGEMENT

It allows the resetting of the status (Setpoint Temperature) set by Melcotel when key card is reinserted

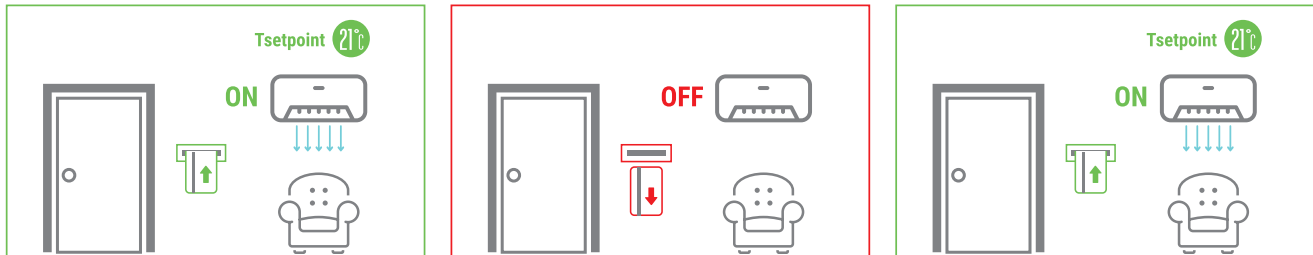


Application example:

When key card is inserted, the indoor unit switches on with the setpoint temperature set by MELCOTEL, for example 21°C. The chamber customer changes the setpoint to 24°C. When key card is removed the indoor unit switches off and remote control is disabled. When key card is reinserted, the indoor unit switches to ON with the setpoint of 21 °C, the one set by MELCOTEL, in order to guarantee energy savings.

WINDOW CONTACT MANAGEMENT


It allows restoring the previous state (ON / OFF status, Setpoint Temperature) when the window is reclosed;

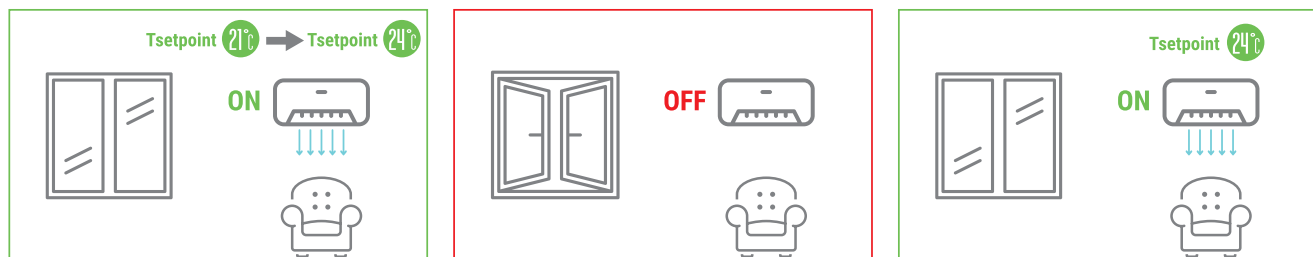

Application Example:

The indoor unit is on and with a setpoint temperature equal to that set by MELCOTEL, for example 21°C. The chamber customer changes the setpoint to 24°C. When the window is opened, the indoor unit switches off and remote control is disabled in order to avoid energy waste. When the window is reclosed, the state prior to opening is restored, i.e. the indoor unit returns to ON and to the setpoint previously set by the customer chamber, i.e. 24 °C.

ARCHITECTURE

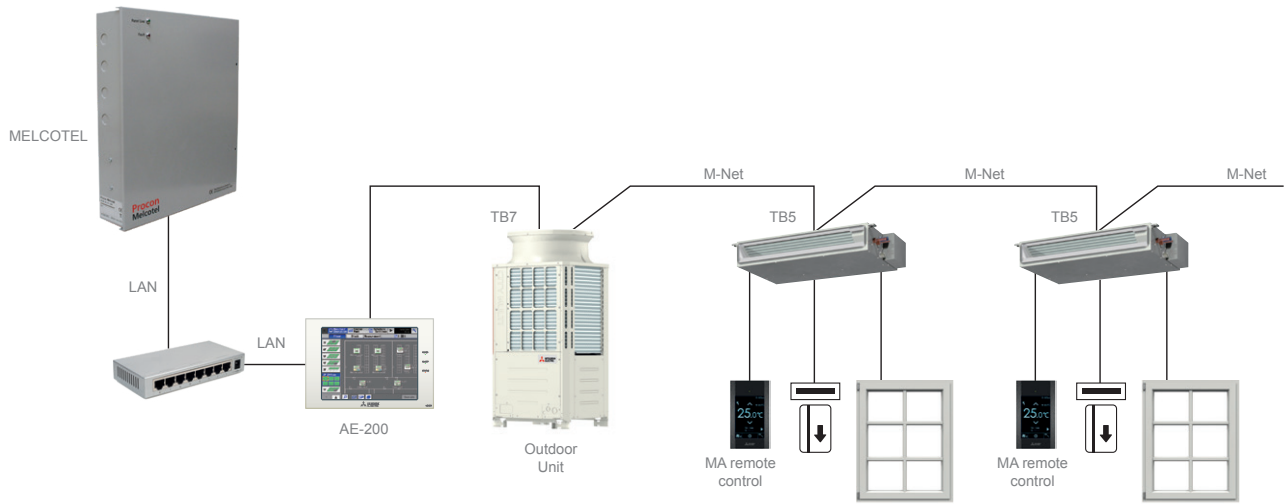

First Centralized Controller HAVE to be necessarily AE-200;
In order to implement the window and/or key card contact system it is necessary to provide one PAC-SE55RA for each indoor unit.





Remote monitoring and control system



3D Tablet Controller

3D Tablet Controller is the new solution by Mitsubishi Electric

allowing portable system management from Smartphone and Tablet **inside the building**. User configuration, with restrictions and privileges, makes it the ideal solution in those application serving different environments, such as offices or apartments. Thanks to its simple and intuitive interface the user is able to control and monitor **air conditioning** and **hot water production** units on **mobile device**, just as easily as he would on a traditional remote control.

This is possible thanks to WEB Server 3D centralized control installed on site, connected to the building Wi-Fi router*1.

*1 Not supplied by Mitsubishi Electric.

INSIDE THE BUILDING



MELCloud[®] MELCloud

CITY MULTI

• Cloud remote **monitoring and control** system.




- Born for residential applications, it's now being expanded to VRF CITY MULTI.
- **Complete and intuitive** solution with all main control and monitoring functions.
- Does not require WEB Server 3D centralized control (AE-200, EW-50).

RMI

REMOTE MONITORING INTERFACE

• Cloud remote monitoring and control system **for professional use**.

- Allows all main remote control and monitoring functions.
- **Advanced energy monitoring** features are available, such as hourly consumption view, custom charts and data collection and display.
- Geo-localized **multi-site** management.
- **Multi-user** management for centralized systems.
- **Energy consumption apportioning***2.

			
Group/Individual simplified management*2	•	•	•
Available for Smartphone and Tablet	•	•	•
Dedicated App		•	•
User restrictions	•	•	•
Outside the building (Cloud)		•	•
Internet connection needed		•	•
WEB Server centralized control needed	•		•
Advanced energy monitoring			•
Monthly/Custom charts and reports			•
Multi-site management			•
Energy consumption apportioning			•

*2 For compatible product lines please refer to catalogues or contact headoffice

OUTSIDE THE BUILDING



3D TABLET CONTROLLER

WI-FI REMOTE MANAGEMENT SYSTEM



New Wi-Fi management system by Mitsubishi Electric

3D Tablet Controller allows system management and control through Smartphone and Tablet under LAN Wi-Fi coverage.

Simple and intuitive interface

Thanks to its simple and intuitive interface the user is able to freely control air conditioning and water production units from mobile device, inside the building.


This interface has been designed to have the look&feel of a typical App for Smartphone, with immediate feedback from units and fast setting of operating parameters.

Access and components

WEB Server centralized control connected to Wi-Fi router is needed. 3D Tablet Controller is compatible with all Smartphone and Tablets, thank to access through internet browser.

The user can login at the address:


[http://\[AE-200/EW-50 IP address\]/mobile](http://[AE-200/EW-50 IP address]/mobile)

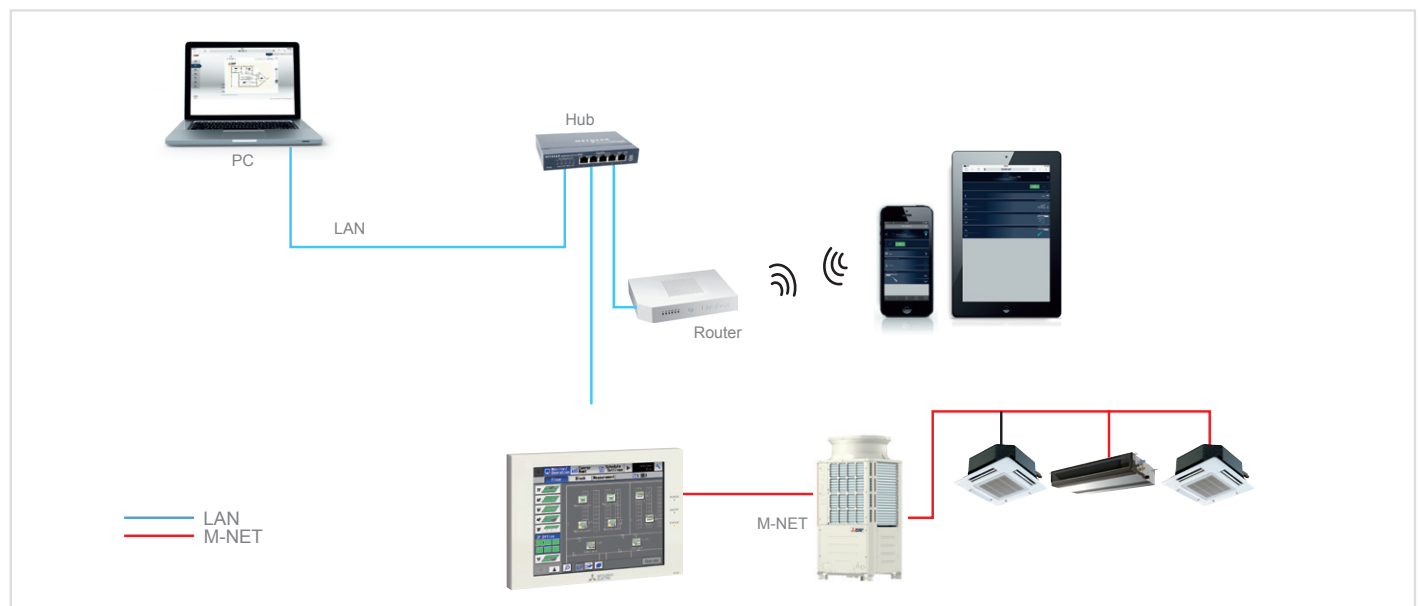



Mobile interface

The web interface has been designed following the modern style of App for Smartphone and Tablet, maximizing easy of use and intuitiveness for mobile use.

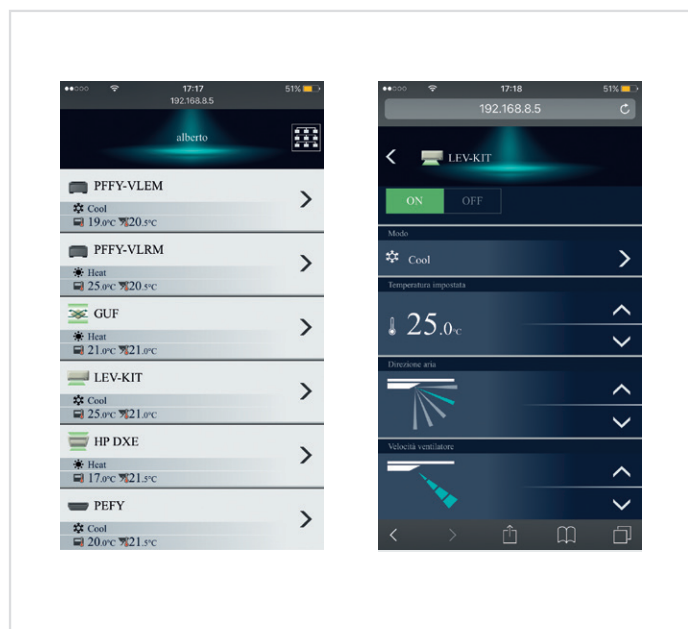

Advantages

- Compatible with all Smartphone and Tablet mobile devices, regardless of the brand and operating system.
- No need for internet connection, communication is direct between device, router and centralized controller.
- Possibility to replace the wired remote controls
- Possibility of configuring different users with privileges/restrictions on the available functions

MELCLOUD CITY MULTI

CLOUD-BASED REMOTE MANAGEMENT AND SUPERVISOR SYSTEM



MELCloud, the Wi-Fi controller for VRF CITY MULTI systems.




MELCloud, the new Wi-Fi controller for your Mitsubishi Electric VRF system. By using the cloud for sending and receiving information and the dedicated Wi-Fi interface (MAC-567IF-E), you can now control your VRF system easily wherever you are from any PC, tablet or smartphone with an internet connection.

The MELCloud service has been designed to ensure complete compatibility with PCs, tablets and smartphones via dedicated apps or via a web browser

Registering the system

The system must be registered to activate the MELCloud service. Once the interface is connected to the indoor unit and paired with the router, the system itself may be registered. To activate Wi-Fi control capability, simply access the website www.melcloud.com, sign up as a user and register the interface used. After registering, you will be able to take full advantage of the potential offered by the MELCloud service and manage your VRF system from any location over the internet.

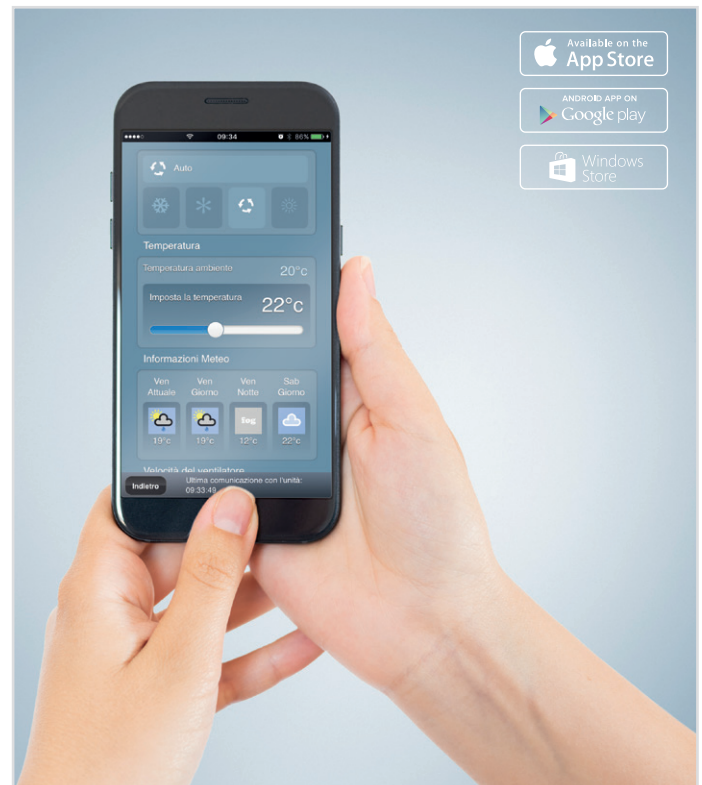

Control functions for CITY MULTI indoor units

Main functions:

- On / Off
- Mode (Auto/Heat./Cool./Ventilation)
- Fan speed
- Programmable weekly timer
- Louvre angle setting
- View and set ambient temperature
- Local weather information

(availability of functions depends on the model of indoor unit connected to the controller)



Control functions for Lossnay ventilation systems


Main functions:

- On / Off
- Ventilation mode
- Fan speed
- Timer



MELCloud® CITY MULTI - SYSTEM ELEMENTS

WWW.MELCLOUD.COM

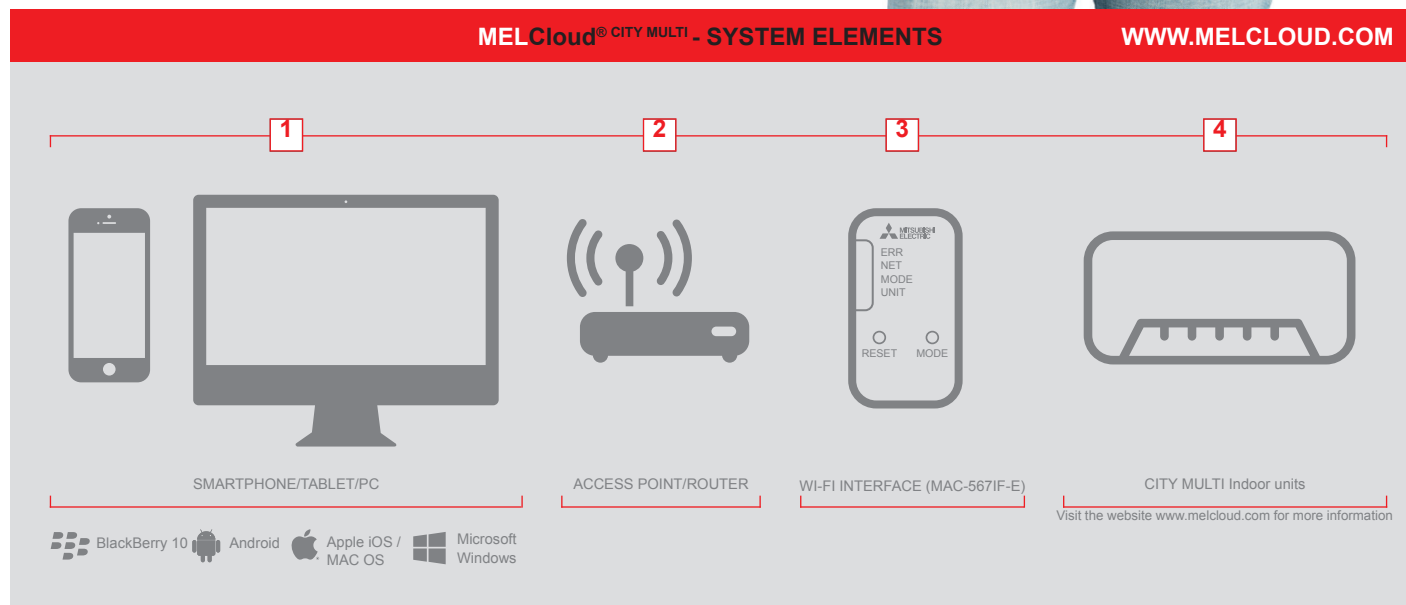

REMOTE MONITORING INTERFACE

CLOUD REMOTE MANAGEMENT SYSTEM




The Cloud system by Mitsubishi Electric for large installations

The RMI system lets you control your air conditioning, heating and domestic hot water production system remotely from a smartphone, tablet or PC. The system may be used to monitor the performance of your appliances, programme functions, check consumption and view operating states to optimise the efficiency of the system.

Your perfect climate in an App!

Control your air conditioner, adjust temperature and air flow settings, view and manage hot and cold water production status and check for system faults.

ALL FROM AN APP ON YOUR SMARTPHONE OR TABLET.

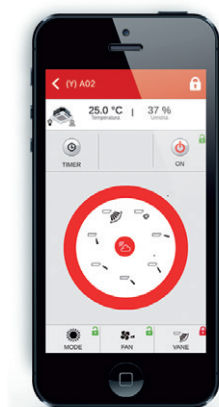

Simplified control for all of your systems

Set weekly programmes and special events, and view and analyse the operating parameters of your system remotely from a mobile device with a graphic interface that lets you change settings instantaneously when needed.



Manage your systems with detailed information and analytical functions


Manage multiple installations with different sizes and architectures conveniently from the application on your PC, view function parameters in a summarised dashboard interface, and analyse specifically created reports to make your installation work even more efficiently. RMI is also the ideal solution for the centralized management and supervision of multiple installations in different locations.



System architecture

The 3D TOUCH Controller WEB Server centralized controller performs the crucial role of acquiring and monitoring data via the M-Net data transmission bus linking all the components of the VRF CITY MULTI, Mr. Slim or Residential system.

A router (available as wired ADSL or 3G Mobile versions) creates a secure, protected communication channel with the RMI Server. The modular flexibility of the RMI Server makes it possible to store enormous volumes of data, which is acquired, processed and archived for access from portable devices. This infrastructural complexity, combined with superior processing, management and security capabilities, is encapsulated in an extremely user friendly concept, to help users optimise the energy usage of their systems.

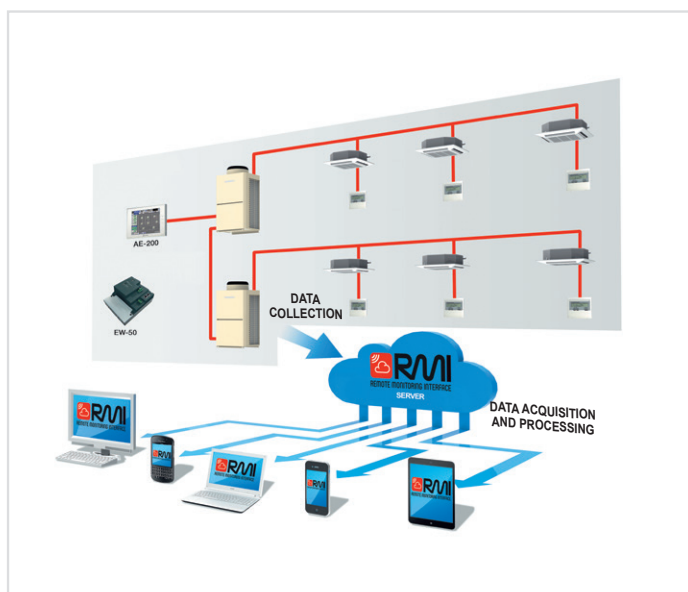

The project

The RMI project is the result of a forward thinking idea by Mitsubishi Electric to offer its customers the capability of managing their installations from portable devices, adding a significant new advantage offered by these systems. The all-new **RMI** system is the **FIRST** system of its kind based on **Cloud Computing** technology, which lets you interface with your system via a simple yet secure internet connection. RMI makes it possible to manage Mitsubishi Electric air conditioning solutions, with **energy consumption monitoring and maintenance functions**, from **smartphone** and **tablet** apps for the iOS and **Android** operating systems, and via a private **WEB Client** area from a **PC**. The RMI system is based on a dedicated infrastructure (RMI Server), which may be described as a container for installation data that is collected and made accessible **simply and intuitively**, and filtered and represented appropriately for the type of user analysing and using the data.

The project was designed from the start with security in mind, to protect the installation and the client against unauthorised access with a secure VPN connection (Virtual Private Network).

Who can use RMI?

Because of its many different functions, the RMI system is suitable for all types of installation, from centralized residential systems to commercial applications and large scale installations.

The remote management and monitoring functions are intended for end users (e.g. tenants), owners, administrators, energy/building managers, global service providers and installing and maintenance technicians.

RMI Service packages

RMI can also be applied to an existing VRF CITY MULTI system, by interfacing through the installation's existing WEB Server centralized controllers. Contact head office to check compatibility between hardware and available functions

See DEMO RMI at:

<http://demo-it.rmi.cloud>

RMI IS AVAILABLE IN THE FOLLOWING PACKAGES

RMI SMART
REMOTE MONITORING INTERFACE

RMI ADVANCED
REMOTE MONITORING INTERFACE

RMI MULTI-TENANT
REMOTE MONITORING INTERFACE

RMI PLAN
REMOTE MONITORING INTERFACE

RMI CHARGE
REMOTE MONITORING INTERFACE

ADVANCED HVAC CONTROLLER

EXTERNAL SIGNAL INTEGRATION



AHC – Advanced HVAC controller

- Solution consists of an ALPHA2 PLC and an M-Net interface, both by Mitsubishi Electric.
- Intuitive object-based graphic programming function.
- Create control strategies using either physical signals (inputs and outputs) or logical signals (via M-Net data transmission bus).
- Receive signals from 2 Groups for a total of up to 32 indoor units for each PLC.
- Programme synchronised energy saving strategies between power consuming utilities (such as lighting) and the air conditioning system.
- 15 inputs and 9 outputs.
- Number of physical inputs and outputs may be increased with dedicated expansion modules.
- Large backlit LCD display for programming functions and viewing graphics, text and values.
- Direct programming with 8 function keys on front control panel without using auxiliary devices.
- Superior installation flexibility with integrated DIN rail adapter.
- System may be password-protected.
- Possibilità di proteggere il sistema mediante password.

Total integration

The AHC programmable controller uses Mitsubishi Electric know-how acquired in industrial automation applications to integrate air conditioning, heating and domestic hot water production systems with third party systems, such as access control, security, lighting control systems etc., allowing communication between the systems via the M-Net data communication bus.

This makes it possible, for example, to use data acquired via the M-Net communication bus to control external devices instead of interlocking the operation of air conditioner units and external systems connected to the AHC Programmable Controller, or using other similar measures.

Flexible programming...

Up to 200 function blocks can be used in a single application (Set/Reset, Timer, Service messages etc.), offering extraordinary scope for controlling the entire installation.

... and safe data!

The application is stored permanently in an EEPROM memory module. This means that active data (such as meter counts) are backed up without requiring power.

Extensive operating temperature range

Designed to operate in a temperature range from 25°C to 55°C and with an IP20 protection rating, these devices are ideal for both indoor and outdoor installation.

Digital and analogue expansion modules

Dedicated expansion modules offer the possibility of increasing the number of both analogue and digital inputs and outputs.

Digital

AL2-4EX:

offers 4 digital inputs

AL2-4EYT:

offers 4 digital outputs

Analogue

AL2-2PT-ADP:

offers 2 analogue inputs

AL2-2DA:

offers 2 analogue outputs

LMAP04

BMS INTERFACE FOR LONWORKS® NETWORKS




LMAP04 BMS interface for LonWorks® networks

The LMAP04 interface allows Mitsubishi Electric air conditioners to communicate with third party BMS supervisor and management systems through the LonWorks® network system. The hardware of the interface consists of an electronic board with software integrated in the board itself which needs no configuration.


The LMAP04 interface may be installed with any remote control or centralized controller of the Mitsubishi Electric range. The LMAP04

interface can also be used in a mixed system, which also includes the TG-2000A supervisor. Each LMAP04 interface can control up to 50 indoor units, each with its own unique address. In installations with AE-200E or EW-50 WEB Server centralized controllers, the LMAP04 interface offers the same modularity as the controllers themselves. In these cases, a separate interface must be installed for each centralized controller.

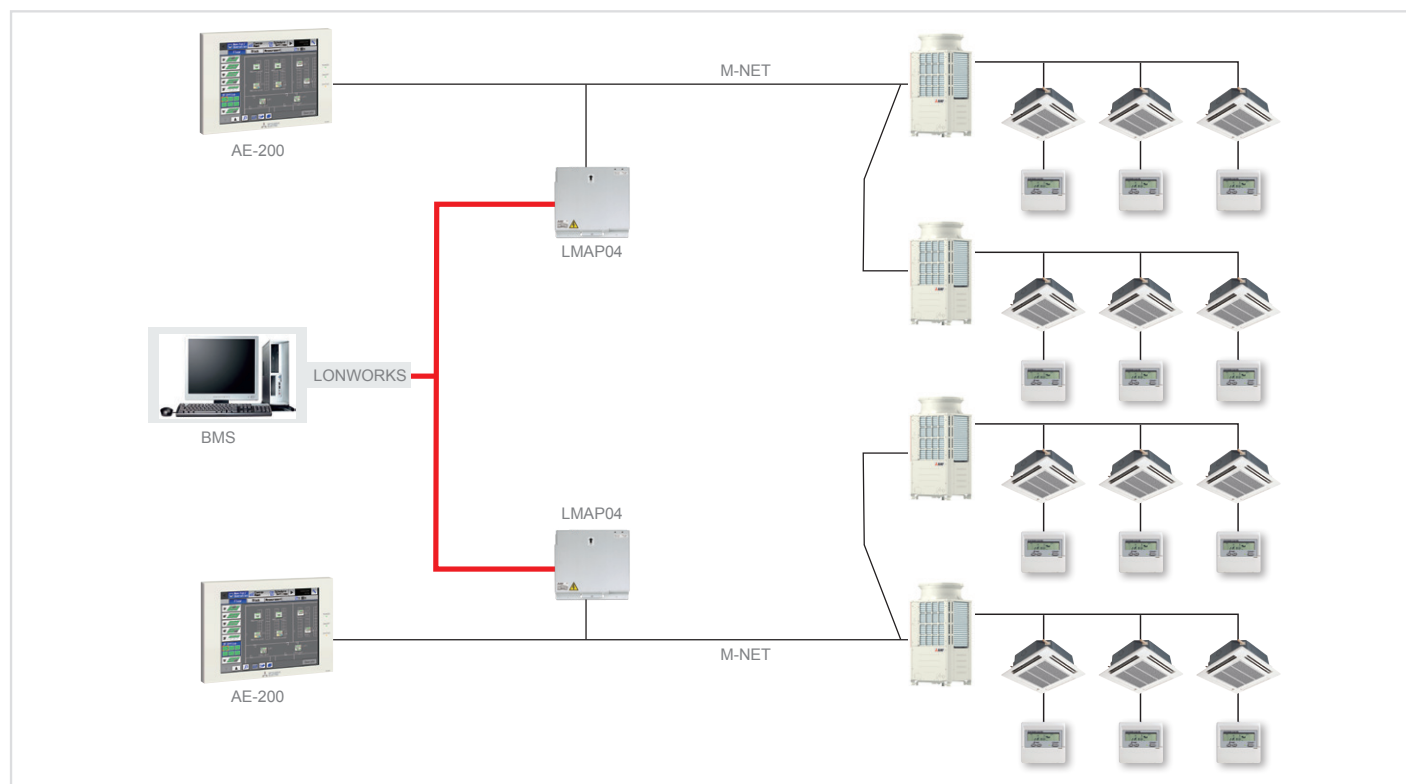

XML

BMS INTERFACE FOR ETHERNET NETWORKS

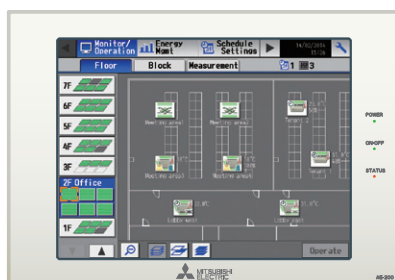

AE-200




EW-50

XML BMS interface for ethernet networks

XML is an innovative new communication system developed specifically for exchanging data over the web. XML makes it possible to create custom software extremely simply, which can even be used with a standard internet browser. The XML protocol makes it possible to integrate with a BMS system using the AE-200E or EW-50 WEB Server centralized controllers, with no additional dedicated hardware interfaces. As all the information necessary for the BMS system is available in XML

format directly over the Ethernet communication port of the AE-200E / EW-50 controller, all that needs to be done is to connect both the AE-200E / EW-50 WEB Server centralized controllers and the BMS computer system to the same network. Connecting to a BMS system with the XML protocol is extremely simple, as the Ethernet network platform is used. No dedicated conversion or interface hardware is needed, as shown in the typical layout schematic.

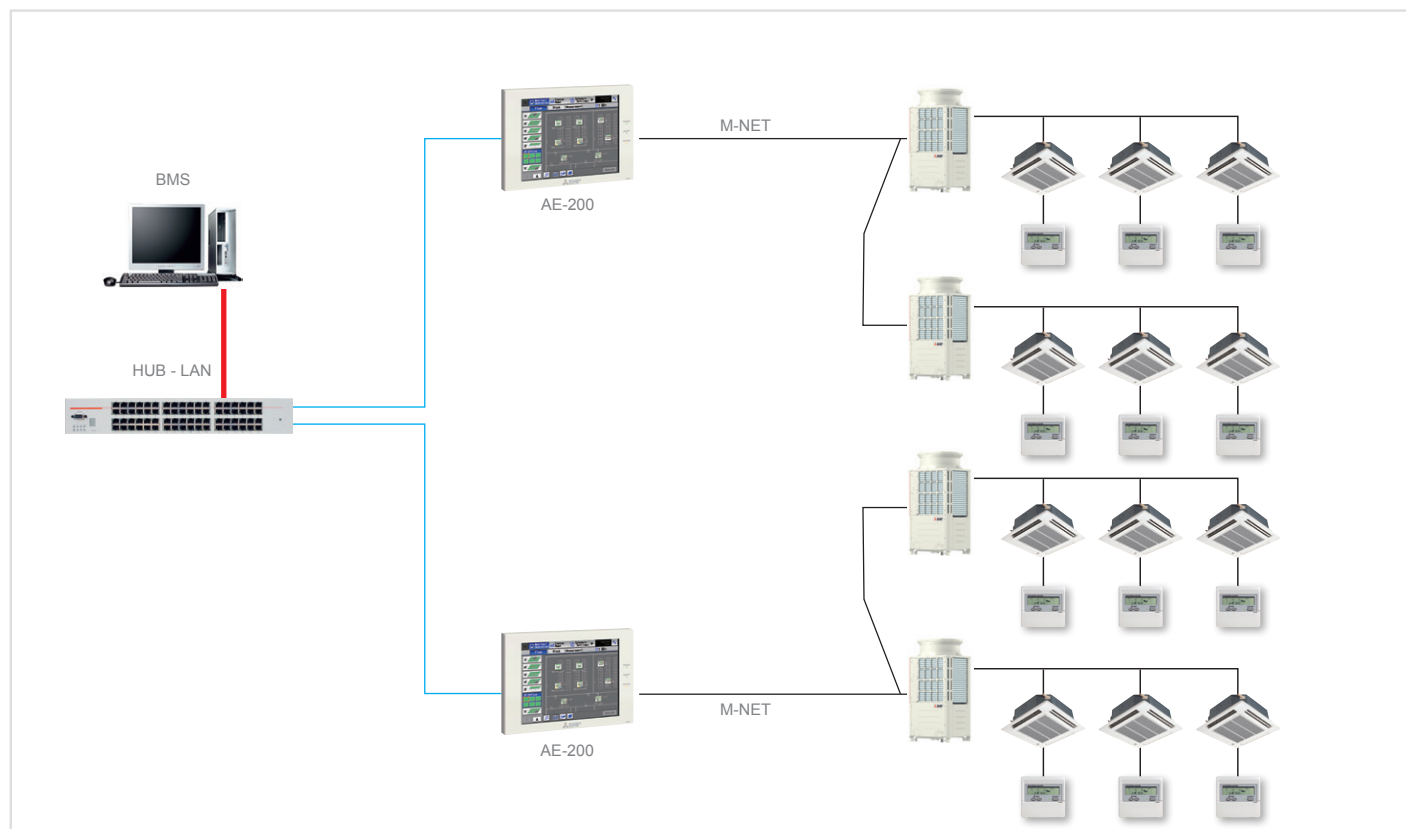

ME-AC-MBS-100


BMS INTERFACE FOR MODBUS® NETWORKS



ME-AC-MBS-100 – BMS interface for Modbus® networks

The Modbus communication protocol was initially used for PLC networks. Mitsubishi Electric offers an interface capable of controlling up to 100 indoor units (ME-AC-MBS-100) for managing a VRF CITY MULTI installation with a BMS system.

The interface is connected to the Modbus supervisor system either by an RS232/RS485 serial connection or a TCP/IP over Ethernet connection, and is connected to the Mitsubishi Electric VRF CITY MULTI installation by Ethernet.

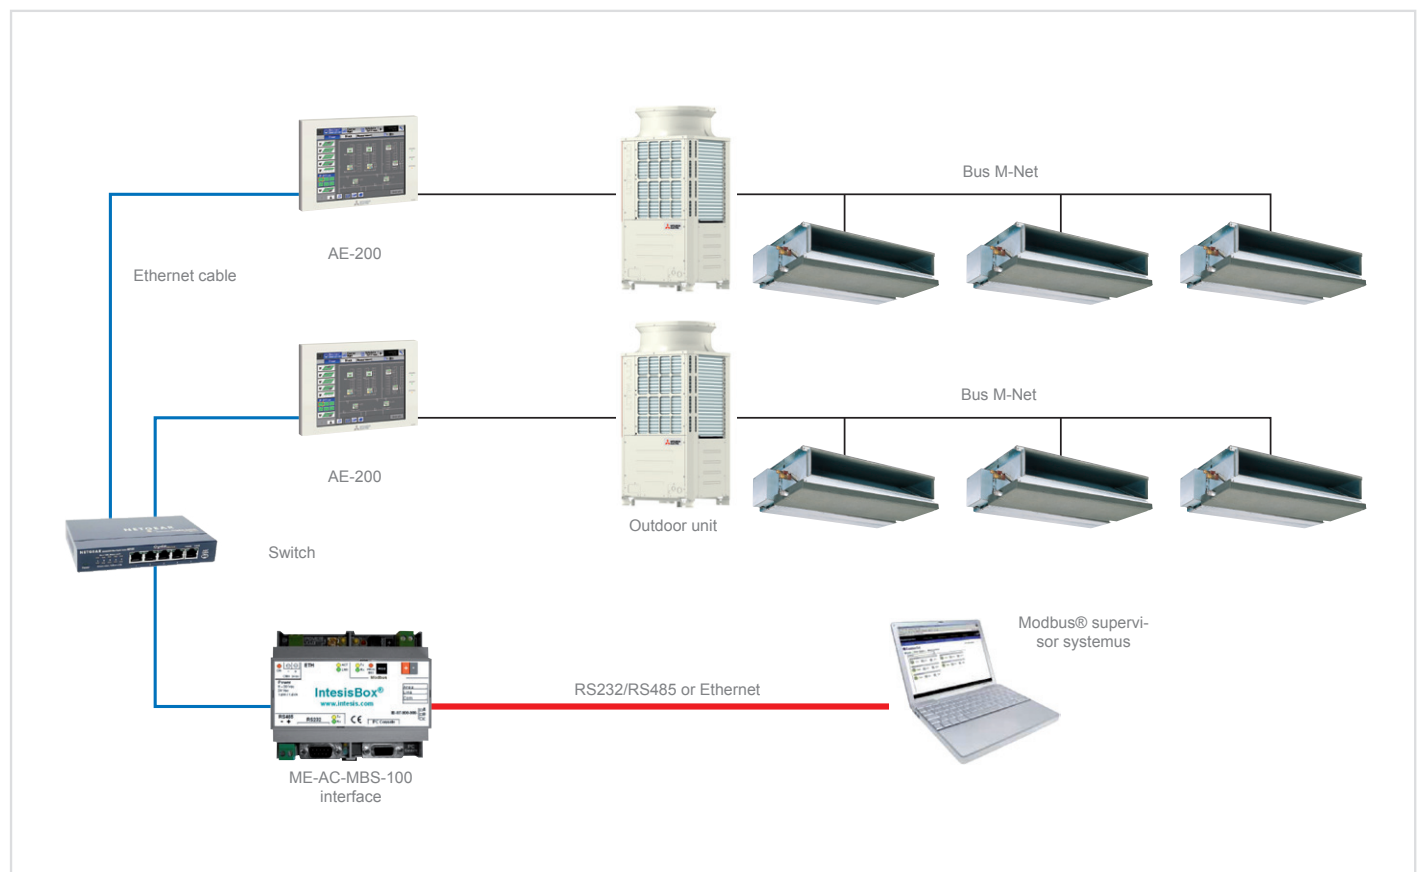

ME-AC-KNX-100


BMS INTERFACE FOR KNX® NETWORKS



ME-AC-KNX-100 – BMS interface for KNX® networks


KNX is one of the global standards for automated household and building control. This open protocol ensures cross-compatibility between products from different manufacturers. Mitsubishi Electric offers an interface capable of controlling up to 100 indoor units (ME AC KNX – 100) for

managing a VRF CITY MULTI installation with a BMS system. The interface is connected directly to the EIB bus linked to the KNX network, and to the Mitsubishi Electric VRF CITY MULTI installation by Ethernet.

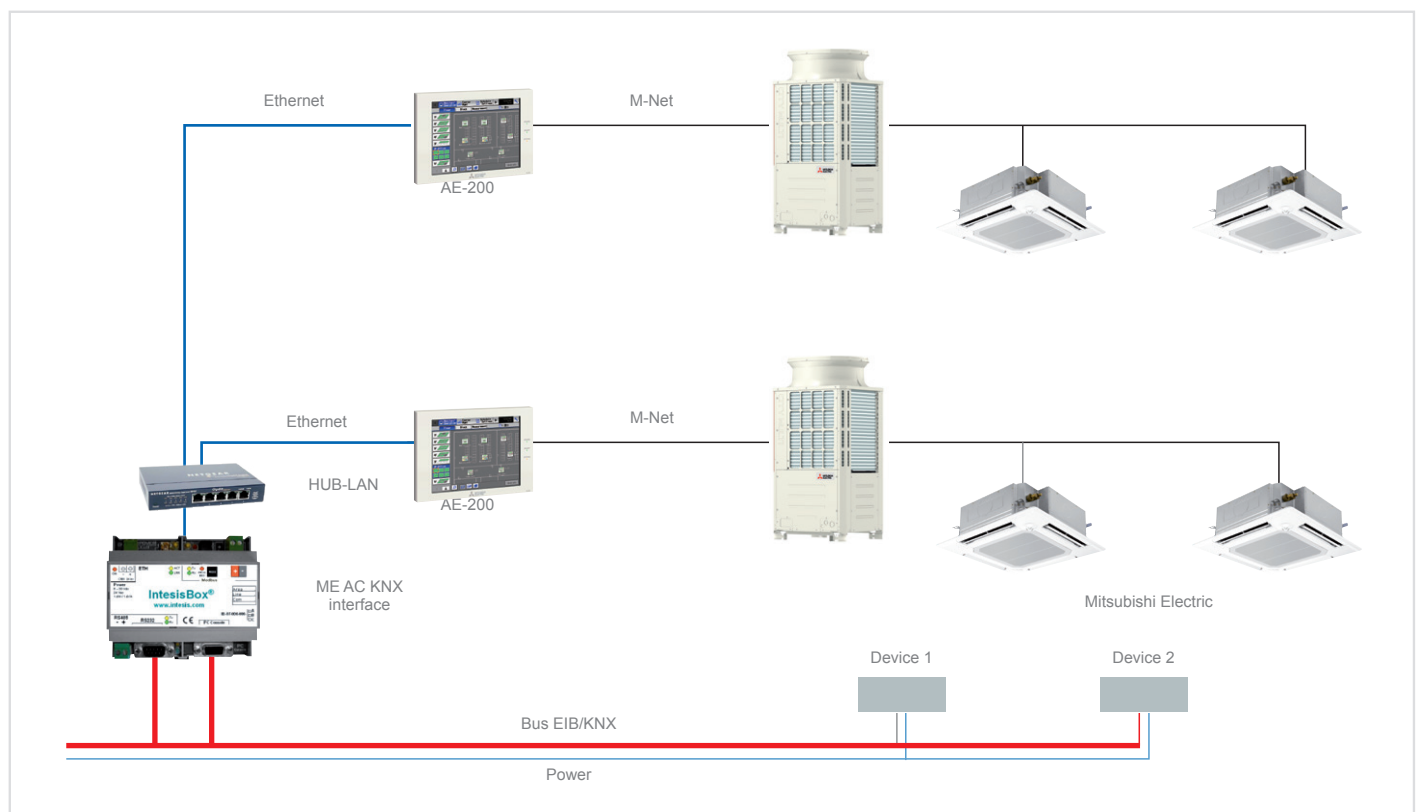

BACnet® PIN CODE


BMS INTERFACE FOR BACNET® NETWORKS

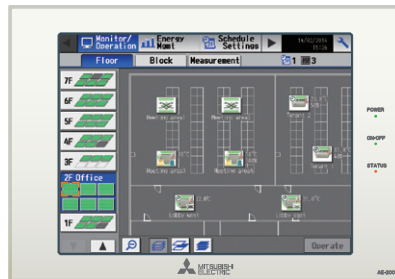

BACnet® PIN code

The BACnet® protocol was originally developed by ASHRAE in North America specifically for HVAC applications (Heat, Ventilation, Air Conditioning). It was subsequently also adopted in Europe as one of the standard communication solutions for air conditioning systems, together with LonWorks® and other protocols. One of the greatest advantages of this protocol is the extraordinary degree of cross-compatibility it offers, allowing systems from different manufacturers to be integrated with each other. New BACnet PIN code allows communication between Mitsubishi Electric system and BACnet BMS network with the same monitoring

information and settings which were available with BAC-HD150. **BACnet PIN code is available only for WEB Server 3D centralized controls (AE-200, EW-50).** Physical connection is via Ethernet cable through a dedicated port on centralized control. Thanks to new BACnet PIN code it is possible to remove one hardware component (BAC-HD150) from the system, simplifying its structure and removing one potential source of malfunction. Each centralized control equipped with BACnet PIN code is able to handle up to 50 indoor units and 50 groups.

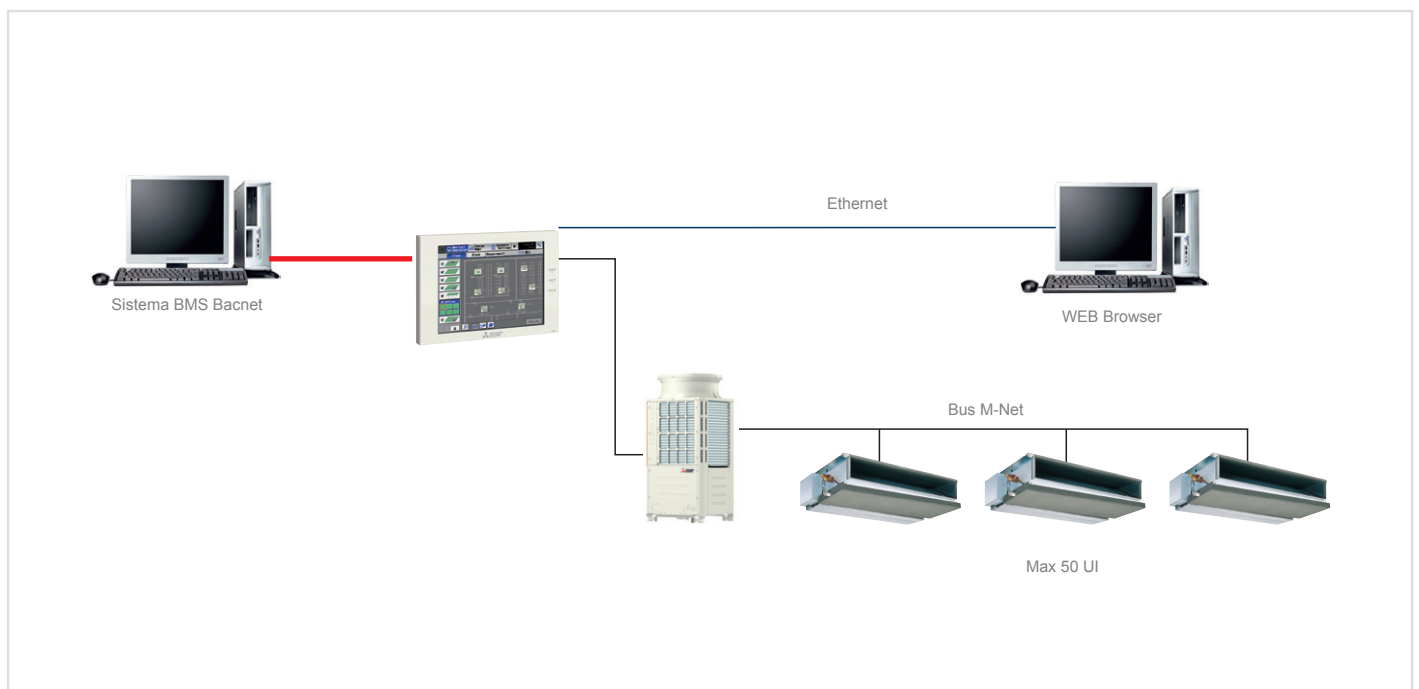

Modular Chiller

e-Series

Modular Chiller		294
P900		300
P1500/1800		312
M1500/1800	NEW	324



Modular chiller

NEW

e-series

R32

The e-series chiller allows for up to six individual units to be connected together. Available as a cooling only or heat pump version, the e-series is suitable for both comfort and process cooling applications.

Mitsubishi Electric's modular chiller line-up contributes to realizing high functionality, reliability and energy saving with its own control.

Three capacity modules with the side flow type of 30 HP, the top flow type of 50, 60 HP

Both the 50HP and 60HP models are available in two different refrigerant version, the traditional one R410A, and the new low GWP solution R32



A new generation of chiller technology

Mitsubishi Electric is the first name for comfort and efficiency.

Founded in 1921, Mitsubishi Electric is now a global, market leading environmental technologies manufacturer. In the worldwide market, the Living Environment Systems Division provides pioneering solutions that heat, cool, ventilate and control our buildings in some of the most energy efficient ways possible.

Through our technical expertise, long experience and innovative product range, we enable building operators everywhere to significantly improve energy efficiency, reduce running costs and adhere to increasingly tough legislation. We believe that global climate challenges need local solutions. There are number of challenges facing building owners and managers today, they must tackle ongoing requirements to reduce energy used in their buildings and their running costs, and our aim is to help them in achieving these goals.

At Mitsubishi Electric, we have evolved and today we offer advanced technology that really can make a world of difference. permettono la classificazione in **classe A+++** sia in **raffrescamento** che in **riscaldamento**.

Why chillers?

Today's building owners and managers face the challenge of providing a comfortable, productive space that is also energy efficient.


As the drive to reduce energy waste continues with further legislation, building services are being scrutinised to find more ways to optimise performance. Air conditioning is acknowledged as a significant energy user in buildings, therefore chillers can make a significant impact on the energy performance and running cost for many buildings. As manufacturers, we are being tasked with producing more efficient equipment and with enabling specifiers to compare products easily with regard to efficiency and performance.

In Commercial buildings HVAC accounts for 45% of total energy consumption

In commercial buildings, HVAC is by far the most energy intensive system, accounting for close to half of the total energy consumption. For this reason every efficiency improvement in HVAC performance can significantly reduce the energy profile of the building, turning HVAC optimisation into a value generating opportunity.

ErP Directive - Lot 21

The main impact of the ErP (Energy Related Products) Lot 21 will be on the way that chiller efficiency is measured. Ratings will be based on higher requirements for seasonal efficiency, and many older existing chillers will not comply. The ErP uses different performance parameters for different types of product to set the Minimum Energy Performance Standards (MEPS).

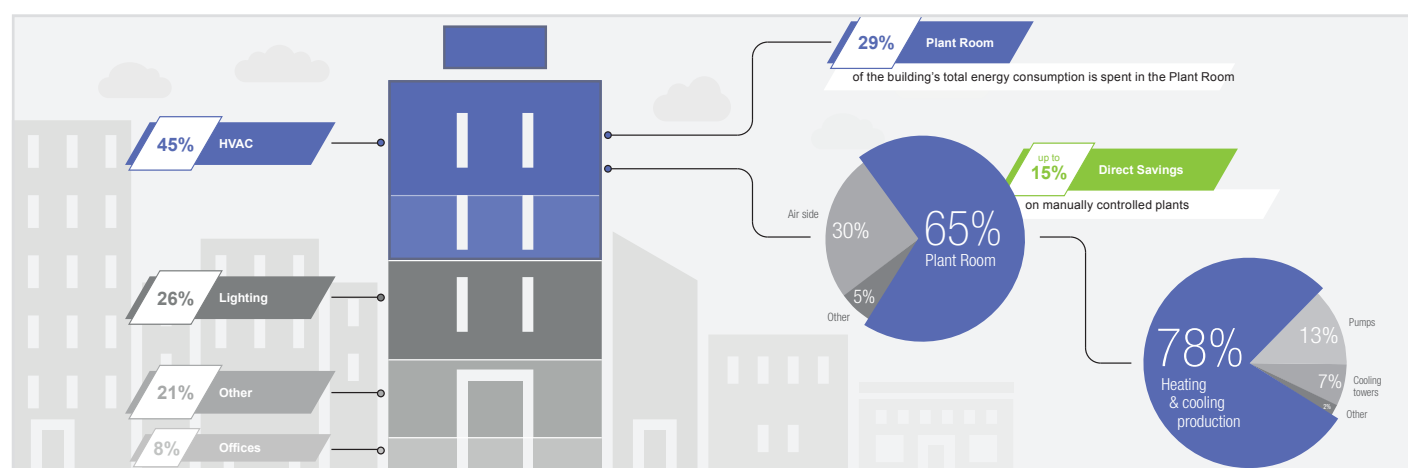

Source	Cooling Capacity	Minimum Efficiency	
		Jan 2018	Jan 2021
Air Cooled	<400kW	149%	161%
Air Cooled	≥400kW	161%	179%
Water Cooled	<400kW	196%	200%
Water Cooled	≥400kW ≤1500kW	227%	252%
Water Cooled	≥1500kW	245%	272%

The latest chiller technologies help to address the ERP Directive by ensuring that they operate to meet the precise cooling demand of the building, conserving energy usage within the building. The main components of water and air cooled chillers are very similar.

The way we use buildings today is changing, and the energy demands are changing with them. So now is a good time to consider the benefits of upgrading chiller plant.

With legislation pushing buildings towards greater energy efficiency and reducing carbon, and new regulations bringing even more efficient chiller options, such as heat recovery, to the market, specifiers have every reason to take a look at the benefits of a modern chiller for both new construction and retrofit scenarios.

The impact of a chiller on the comfort of occupants should also be considered. With a modern, robust technology in place, building owners can be assured that they are providing a comfortable and healthy environment, as well as saving themselves energy costs in the long-term.

Best in class efficiency for energy saving performance by the use of inverter compressors

- Inverter compressor is automatically controlled according to the load.
- Optimal control of fans by using inverters contributes to save energy.

High functionality of modular chiller

- Up to 6 modules can be connected.
- The combination control of modules helps to continue operation even when one module has stopped due to maintenance.

Saving space and installation work


- Small footprint installation helps to save space.
- Built-in header type is optional, external piping space can be reduced.

Easy system control




- Water temperature can be controlled remotely by using local remote controllers.
- By installing an AE-200E/A, it is possible to centrally control e-series and CITY MULTI at the same time.



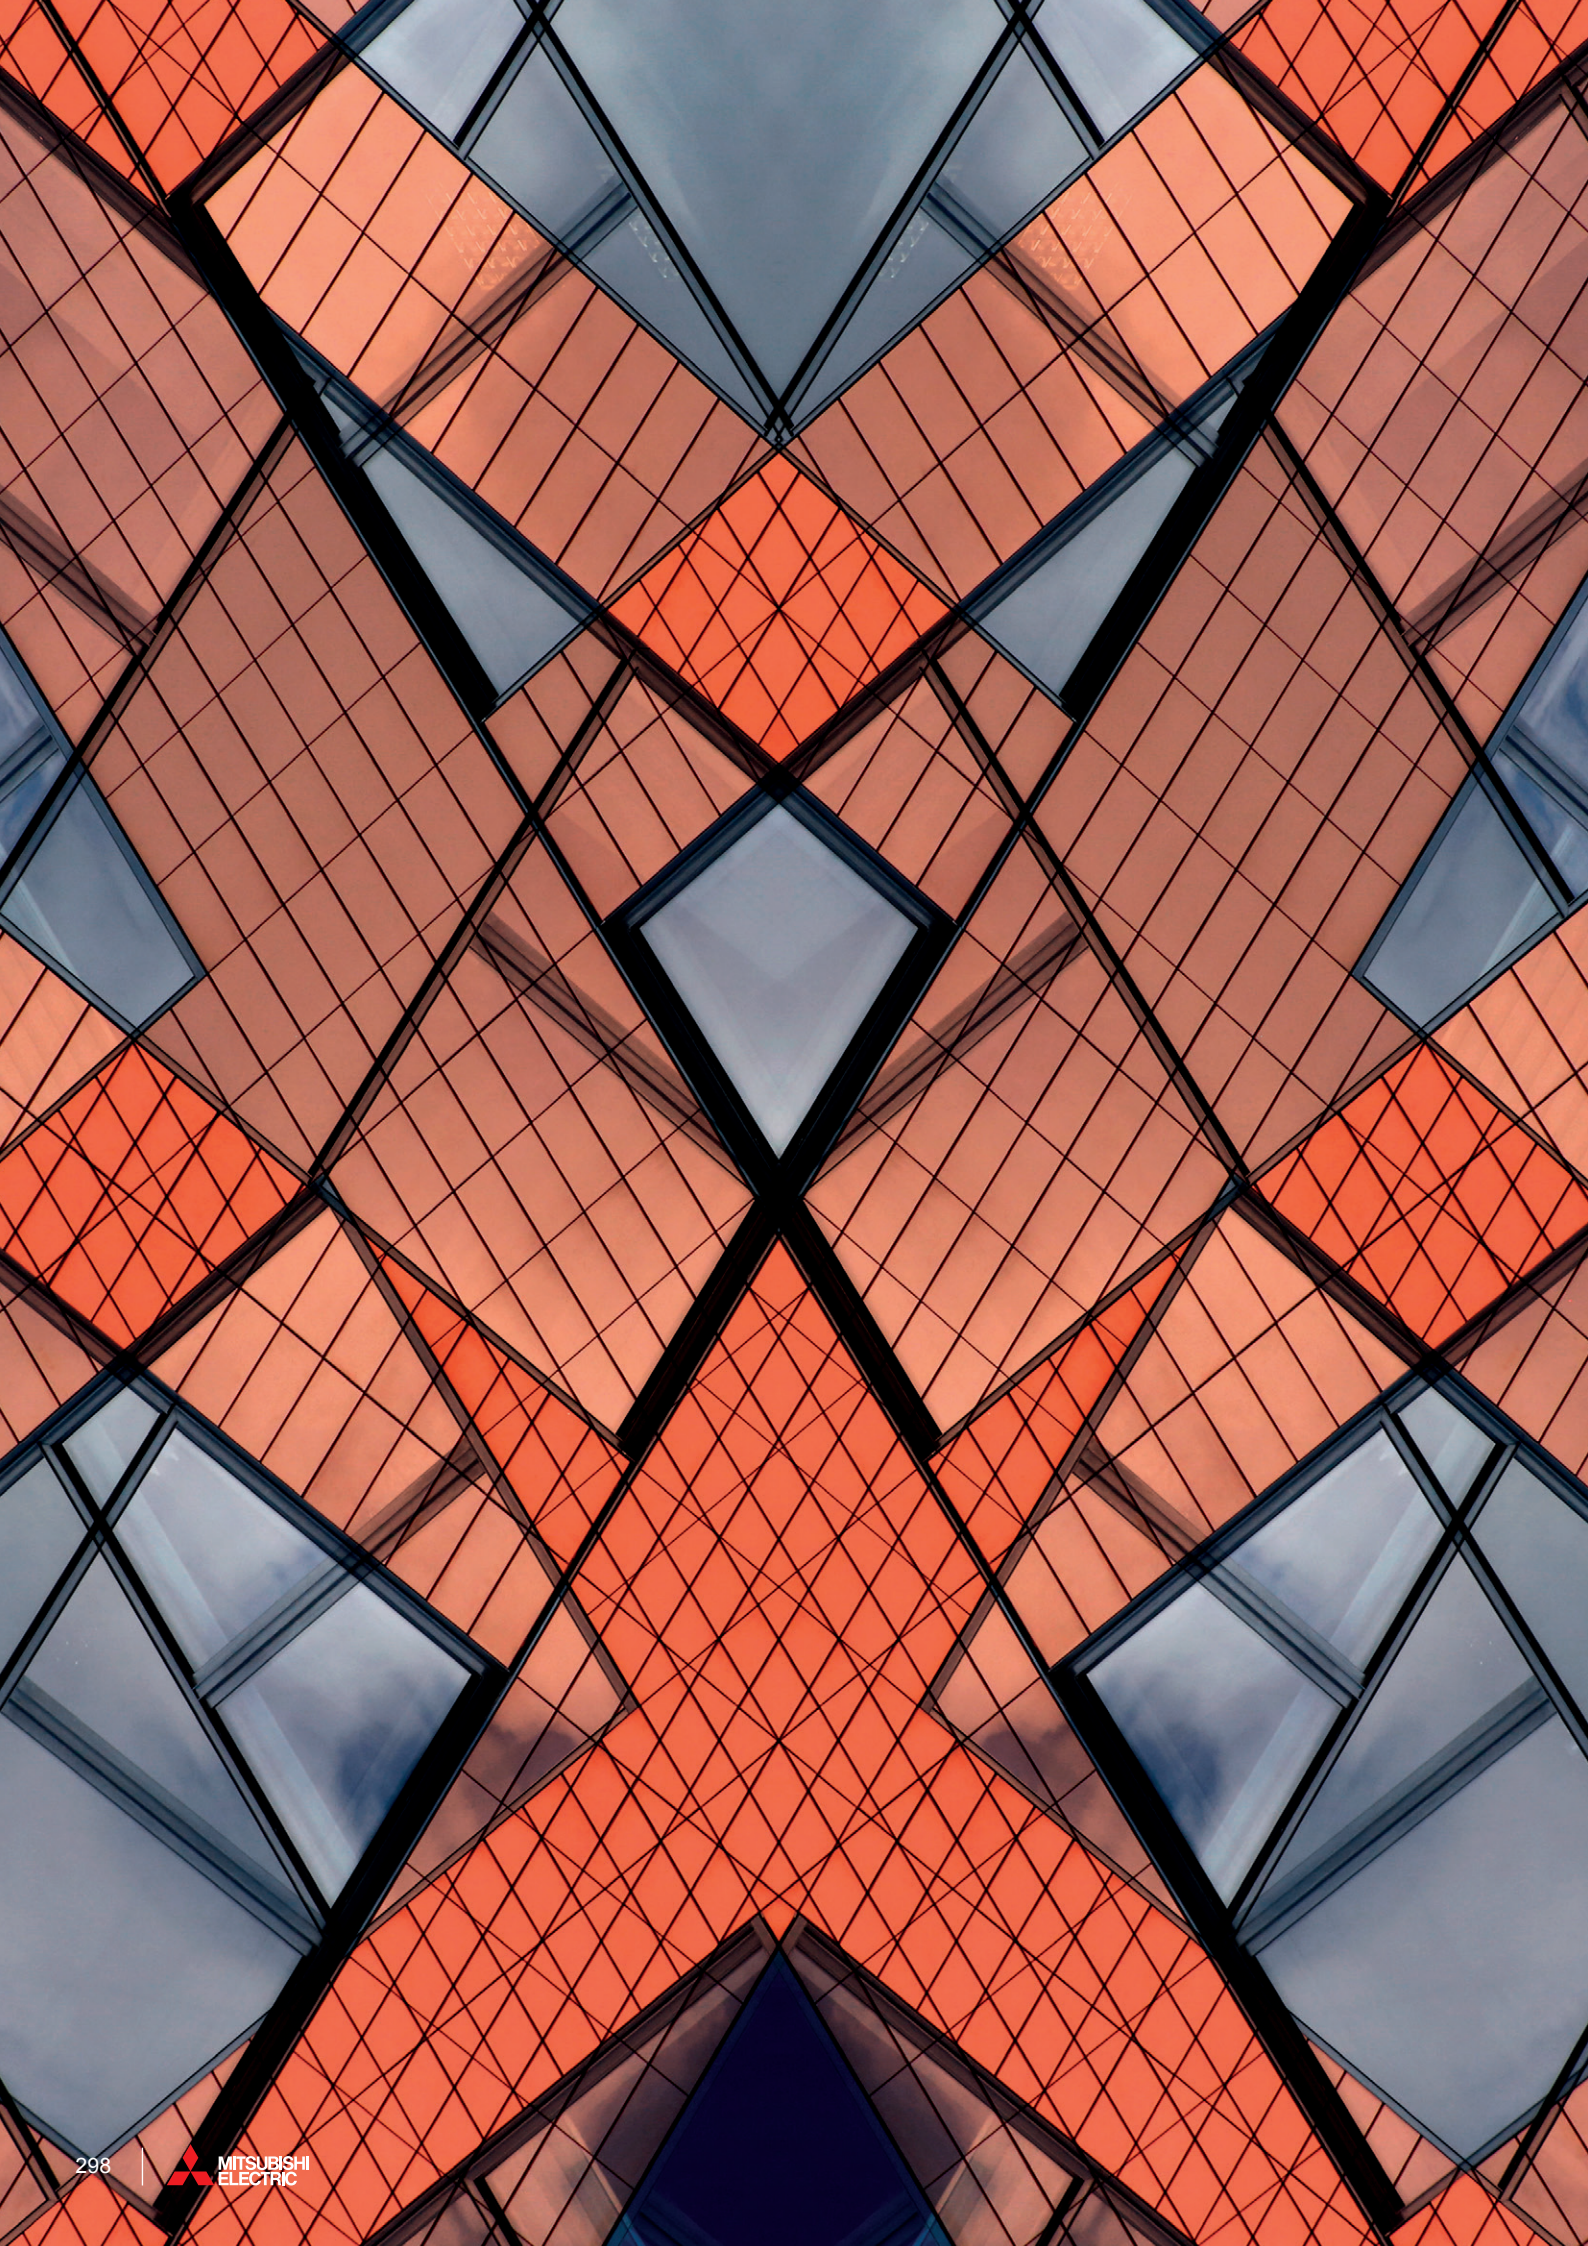




Module line-up

	90kW module* ¹	150kW module	180kW module
			
Heat Pump	EAHV-P900YAL(-N)(-BS)	EAHV-P1500YBL(-N)(-BS)	EAHV-P1800YBL(-N)(-BS)
	EAHV-P900YAF(-N)(-BS)	EAHV-M1500YCL(-N)(-BS) R32 <small>NEW</small>	EAHV-M1800YCL(-N)(-BS) R32 <small>NEW</small>
Heating Only	EAHV-P900YAL-H(-N)(-BS)	EAHV-P1500YBL-H(-N)(-BS)	EAHV-P1800YBL-H(-N)(-BS)
	EAHV-P900YAF-H(-N)(-BS)		
Cooling Only	EACV-P900YAL(-N)(-BS)	EACV-P1500YBL(-N)(-BS)	EACV-P1800YBL(-N)(-BS)
	EACV-P900YAF(-N)(-BS)	EACV-M1500YCL(-N)(-BS) R32 <small>NEW</small>	EACV-M1800YCL(-N)(-BS) R32 <small>NEW</small>

* (-N) indicates model with built-in header.

*¹ The amount of pre-charged refrigerant differs among models. YAF indicates full refrigerant charging model.

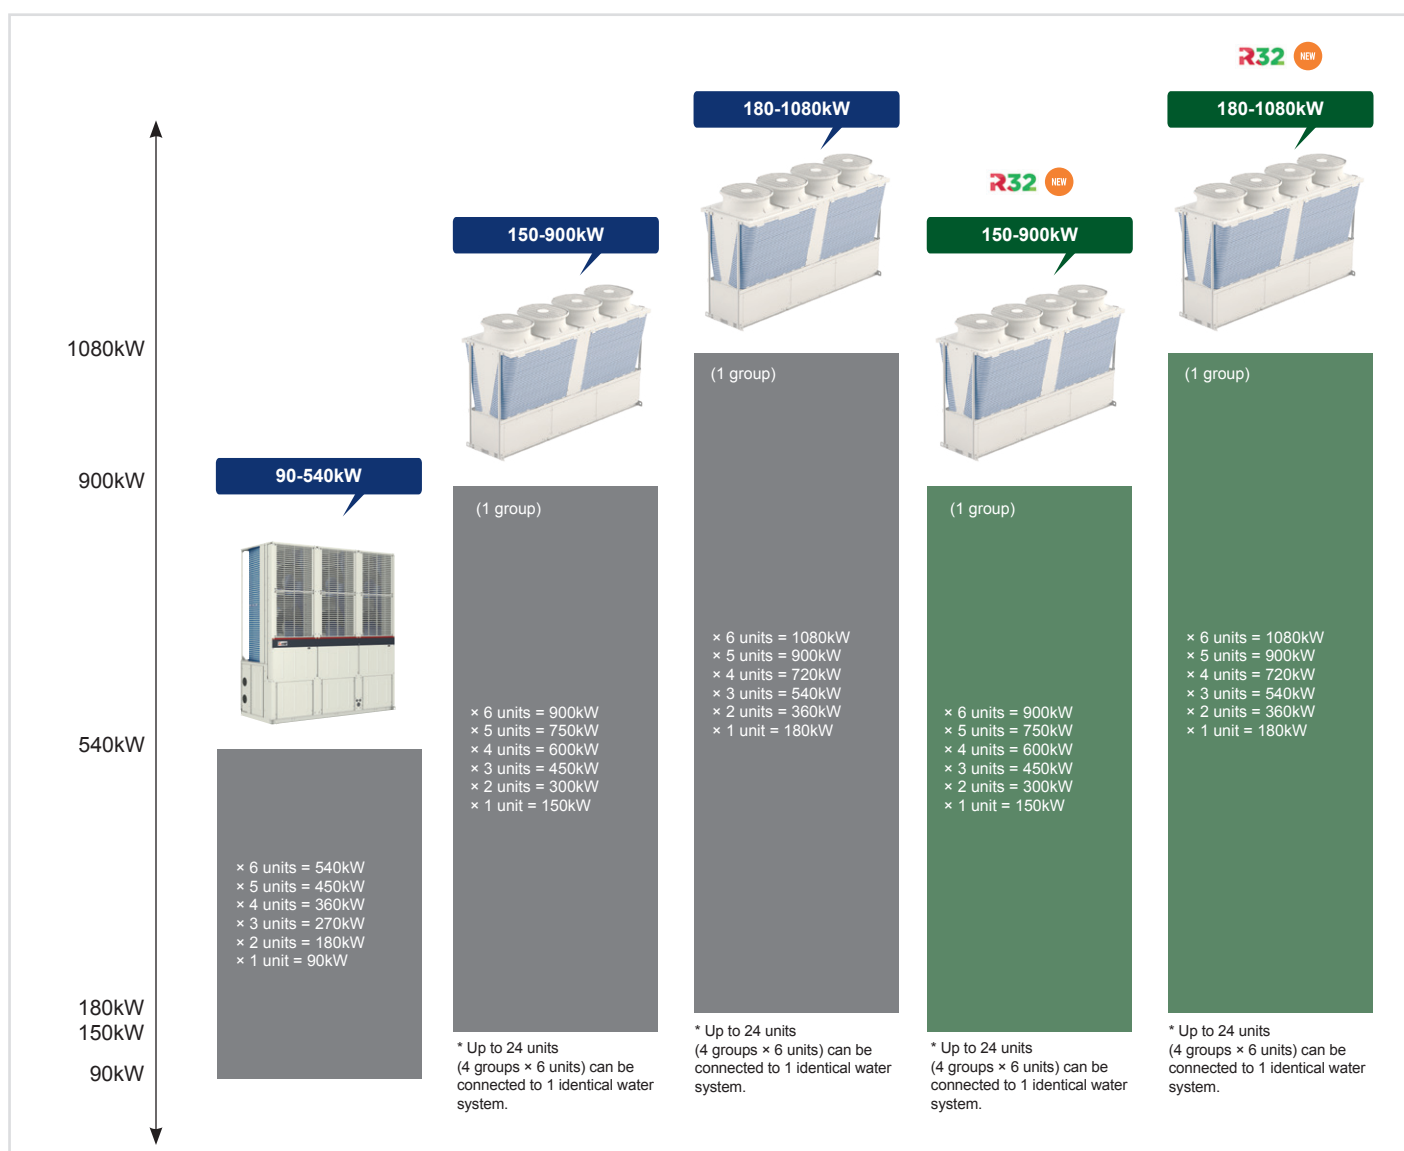

P900

R410A

e-series

HIGH ENERGY SAVING
PERFORMANCE BY
THE USE OF INVERTER
COMPRESSORS

BEST IN CLASS
EFFICIENCY FOR ENERGY
SAVING PERFORMANCE

ENERGY-SAVING
TECHNOLOGY

UP TO 6 MODULES
CAN BE CONNECTED

COMBINATION
CONTROL FUNCTION



High energy saving performance by the use of inverter compressors

Each module is provided with two high-efficiency inverter scroll compressors developed by Mitsubishi Electric and can operate optimally according to the load. This improves the high energy saving performance.

Best in class efficiency for energy saving performance

High EER, High COP

- The air suction area is expanded to maximize the performance of the air heat exchanger.
- Two independent refrigerant circuits are provided in the module to cool and heat water in two stages in series to improve EER and COP.

EER 3.30

COP 3.50

*EER shows the value at an outdoor air temperature of 35°C and cool water inlet/outlet temperatures of 12°C/7°C, respectively. COP shows the value at an outdoor air temperature of 7°C and hot water inlet/outlet temperatures of 40°C/45°C, respectively. Pump input is not included.

High SEER


- Achieved the same SEER from 30 to 180 HP.

SEER 4.48

* SEER shows the value at an outdoor air temperature of 35°C and cool water inlet/outlet temperatures of 12°C/7°C, respectively. Pump input is included based on EN14511.

Suppression of heating capacity drop at low outside temperatures

- A heat pump technology captures heat from the outdoor air. The heating performance decrease which occurs with a decrease in outdoor air temperature has been made up for by installing a larger number of units. This disadvantage has been eliminated with the e-series by increasing the heating performance in the low outdoor air temperature range. This allows the user to reduce the required number of units.

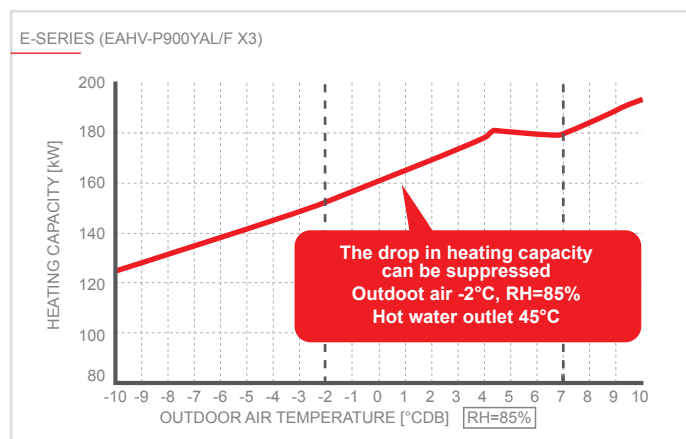

Energy-saving technology

High Efficiency Inverter Compressor

DC inverter scroll compressor is incorporated. Two compressors each are incorporated to increase efficiency.

Two refrigerating cycles

A configuration of two independent refrigerant circuits and the series connection of water-side heat exchangers increase the performance (two-stage cooling).




U-shaped High Performance Compact Air Heat Exchanger

U-shaped air heat exchangers are used. Installing them in a row makes the system thinner.

Weather resistant coating is provided for the heat transfer plate fin as standard.

Inflexed Fan

Adoption of a fan with improved ventilation characteristics and a newly designed trailing edge that suppresses wind turbulence raises fan operation efficiency.

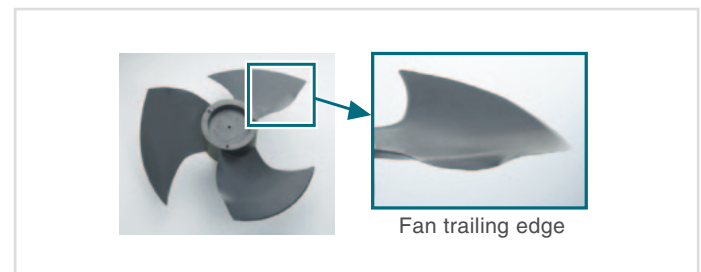


Fan Inverter Control

Air blower fans are also equipped with an inverter to save energy.


Up to 6 modules can be connected

The total capacity can be increased to up to 30HP × 6 modules = 180HP. Because modules can be installed horizontally in a row. Installation in narrow places such as along building walls is possible.

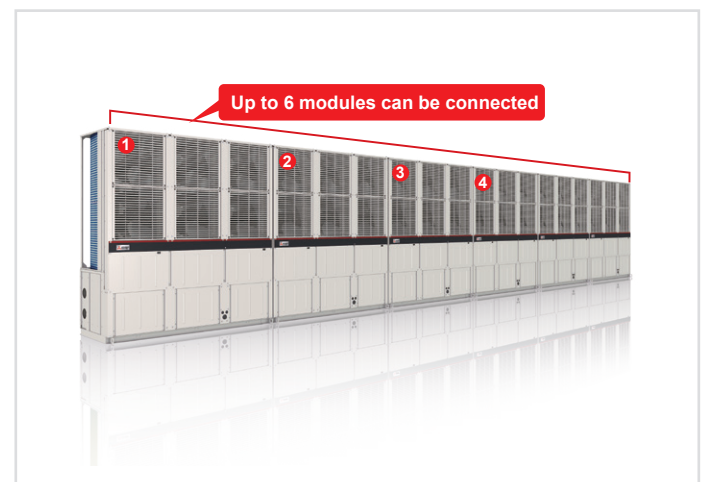


Combination control function

The flexible backup operation among the combined modules enables the continuous operation, even when one module is stopped due to maintenance.

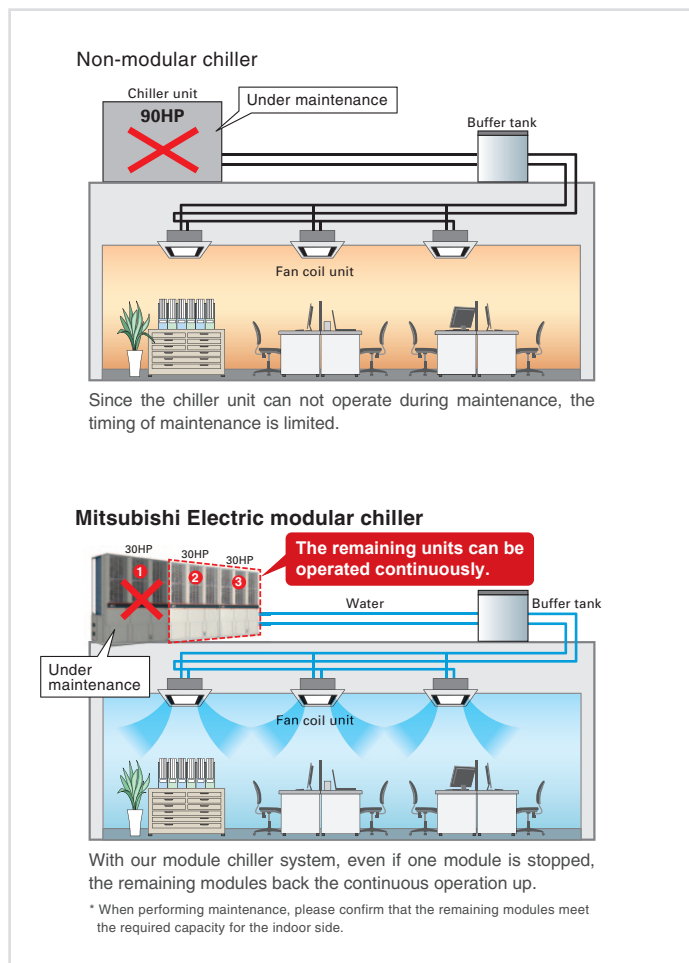

Small footprint installation

Since this module has a compact and thin body, it is suitable for installation along the exterior walls of buildings or in narrow spaces, and it is possible to install the modules on each floor.

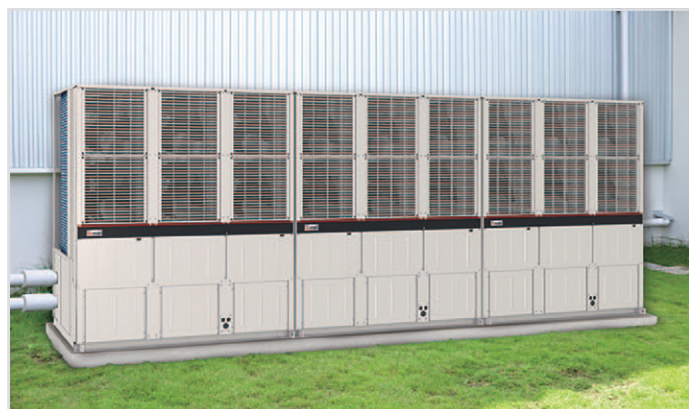


Installation example

Installable in limited space, such as along the outer wall or in the corner of a factory, or in a narrow space of a building. The compact and thin design allows for the consideration of installation on each floor of a building, as is the case with industrial air conditioners. (If the inside header specification is selected).


The figure shows the air blowing surface directed toward the wall (a diagonal blowing air guide is equipped as standard). Directing the air blowing surface toward the wall is effective in preventing short cycling.

The modules can be installed in two rows or in one row on each of two stages using a frame. They can be installed flexibly according to the installation space.


EXAMPLE OF INSTALLATION ALONG THE OUTER WALL OF A FACTORY

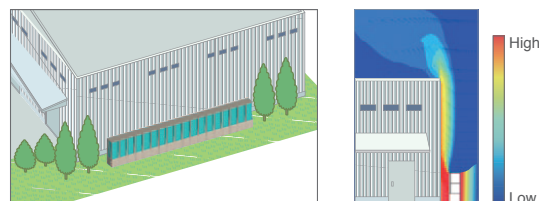


FRONT SURFACE-FACING DOUBLE-ROW INSTALLATION EXAMPLE

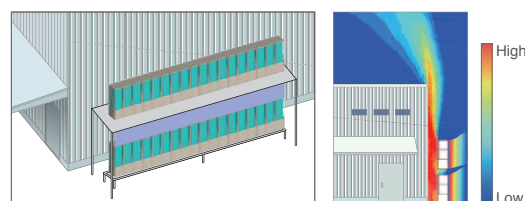

SINGLE-ROW DOUBLE-STACK INSTALLATION EXAMPLE

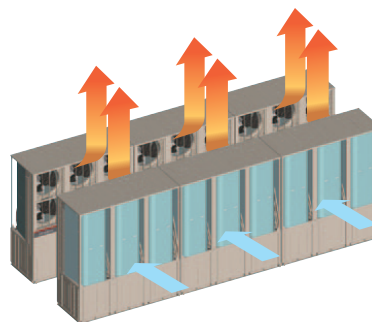

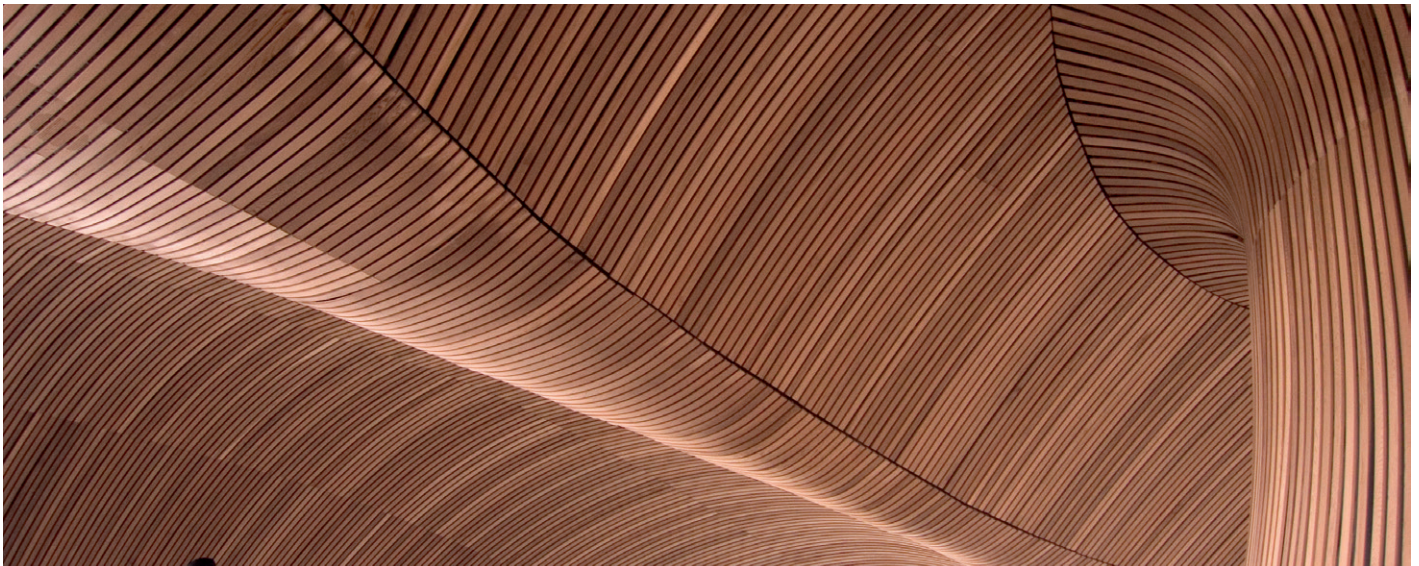


Inside Header

Mitsubishi Electric's Unique Inside Header Incorporates Field Water Pipe Header into Module


- The field water pipe header section that is usually required to connect the module to the field water pipe is now available as a manufacturer option (hereinafter referred to as the "inside header") which can be incorporated into the module at the factory before shipment (a supplied connection kit is used for the connection work at the customer's site).
- This allows for incorporating the field water pipe header section into the module.
- In addition, the field connection work of the inside header is very simple. Significant simplification of the water pipe connection compared to the previous one has reduced the installation time.

Standard Pipe Specification

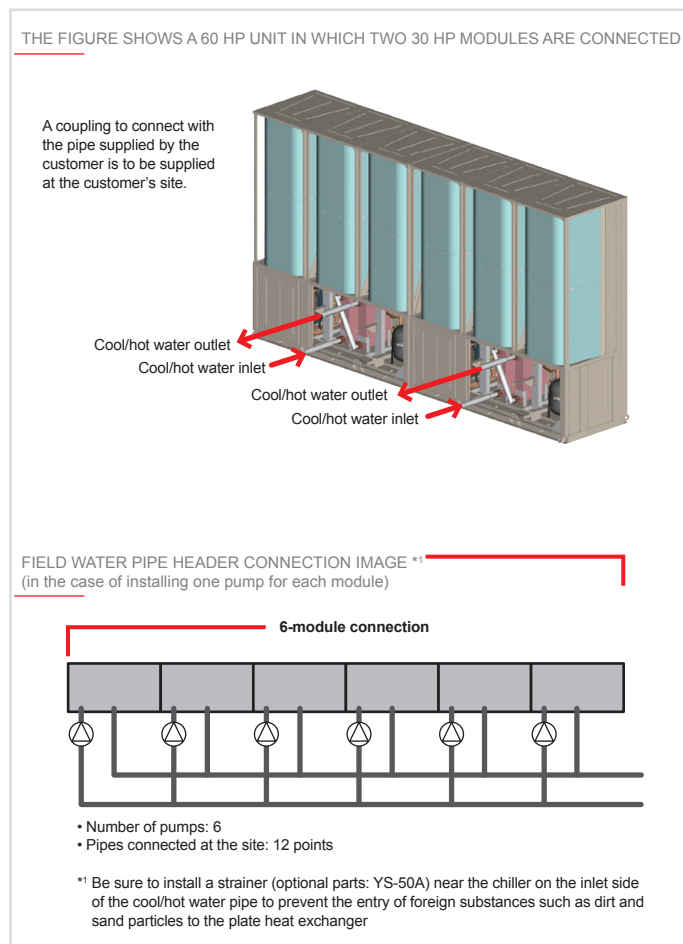


Inside Header Specification

(Left or right connection can be selected for the water pipes)

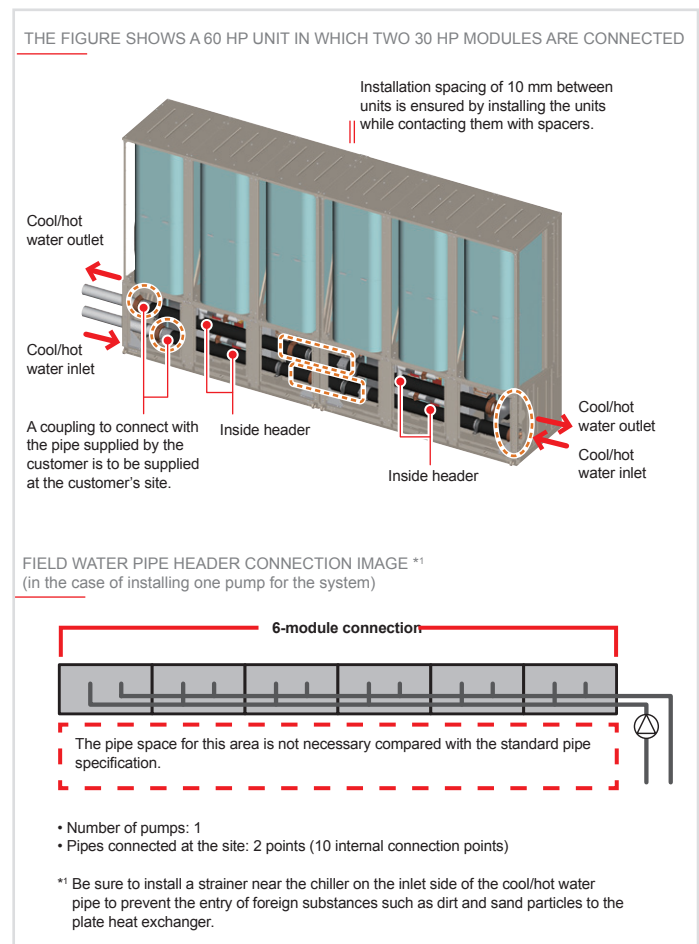


About Pipe Connection Kit


THIS FIGURE SHOWS 540 HP (EAHV-P900YAL/F-N×6) AS AN EXAMPLE.

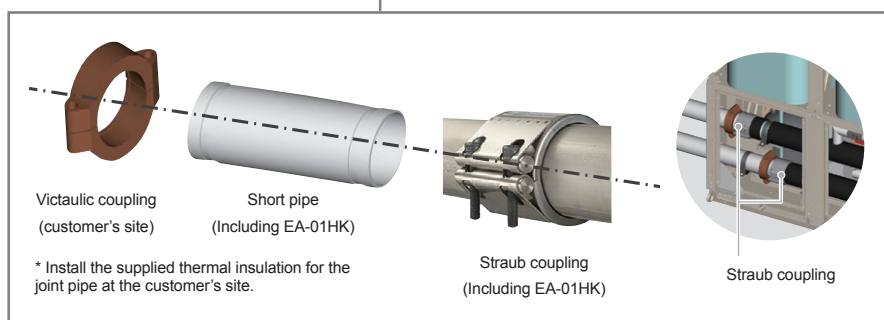

STRUCTURE




No.	Part name	Material
1	Casing	SUS 304
2	Sliding plate	SUS 301 or 304
3	Grip ring	SUS 301
4	Tightening bolt	SUS XM7
5	Rod washer	SUS 304
6	Rod nut	SUS 304
7	Rubber sleeve	EPDM




Allowable clearance and tilt range

Allowable pipe clearance value [W]=0 to 25 mm


Allowable pipe tilt angle [θ]=±2°




The sealed rubber has a lip structure to improve the water-stopping performance. Adjust the position of the Straub coupling so the marking on both sides can be seen.



Just tighten the bolt until the casing fits against (comes into contact with) the metal. Anyone can connect the pipes evenly and securely, regardless of their skills and the type of the pipe used.




CONNECTING PIPE END (Connection at Customer's Site)



Capacity	Module (Inside header)	Optional parts -1- EA-01HK (model)	Optional parts -2- EA-02HK (model)
30 HP	1	1	0
60 HP (30 HP×2)	2	1	1
90 HP (30 HP×3)	3	1	2
120 HP (30 HP×4)	4	1	3
150 HP (30 HP×5)	5	1	4
180 HP (30 HP×6)	6	1	5

Optional parts -1- (Piping Kit) EA-01HK

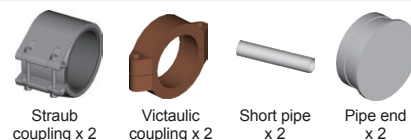

Optional parts -2- (Connection Piping Kit) EA-02HK



Optional parts -2-




The Victaulic coupling and Straub coupling mentioned in the explanation are product names.

Control technology

- Up to 6 modules and one unit can be connected for each remote control.
- Simultaneous control


Unit Remote Control

 <p>PAR-W31MAA</p>	
Control	Simultaneous control
Number of modules that can be connected	6
Number of units that can be connected	1
Number of supported water lines	1
ON/OFF	•
Cooling/heating switch	•
FAN operation switch for snowfall	•
Target outlet temperature setting	•
Scheduled operation	•
Individual error display	•
Outlet water temperature setting of 5°C or below (Brine)	•

Centralized controller*

When connected to the AE-200E/A centralized controller or the EW-50A/E expansion controller, up to 6 e-series modules can be connected to 1 group for centralized monitoring and management. Combined management of CITY MULTI is also possible.


* Centralized monitoring and management are possible only for M-NET-connected e-series units.

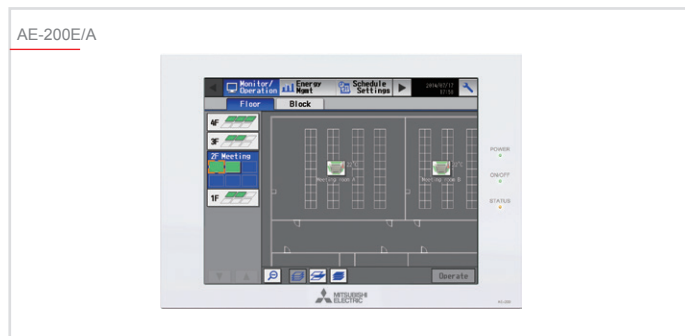

Monitoring on LCD touch panel and web browser

Monitoring of the operating condition—including the water temperature—of e-series units are possible from the LCD screen of the AE-200E/A or from a Web browser. Combined management of CITY MULTI is also possible.


System configuration

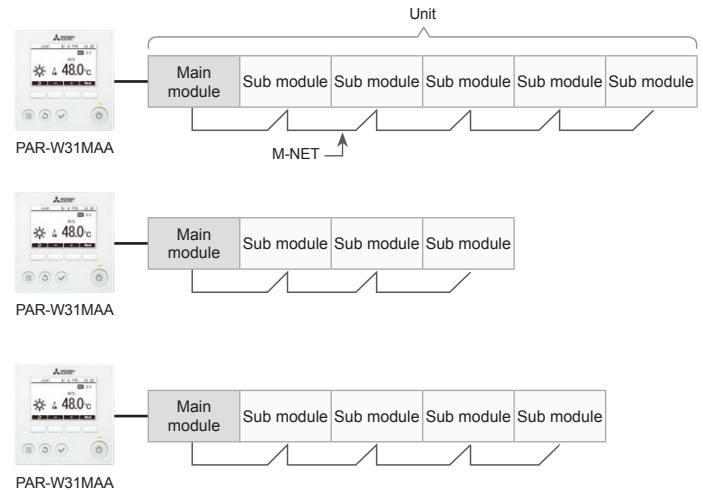

Demand control

Forced capacity control up to the demand upper limit by an external input to the unit (non-voltage normal open). Heating demand is possible in addition to the cooling demand.

SYSTEM CONFIGURATION AE-200E/A

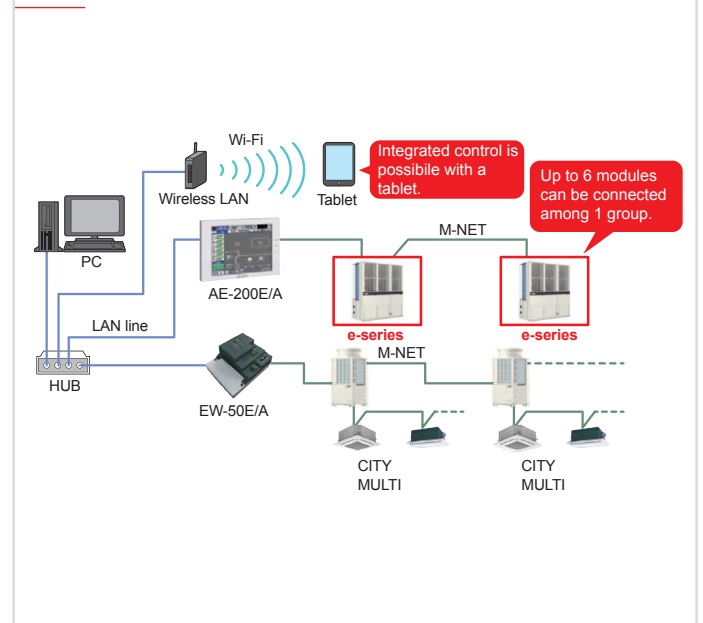

Technical specifications COOLING ONLY MODEL



MODEL			SET	EACV-P900YAL(-N)(-BS) EACV-P900YAF(-N)(-BS)	
Power source			3-phase 4-wire 380-400-415V 50/60Hz		
Capacity change mode			Capacity priority		COP priority
Cooling capacity *1 Water			kW	90.00	63.00
			kcal/h	77,400	54,180
			BTU/h	307,080	214,956
	Power input *2		kW	27.27	16.27
	Current input 380-400-415V		A	46.0 - 43.7 - 42.2	27.5 - 26.1 - 25.2
	Pump input is not included	EER	3.30		3.87
		ESEER	5.66		-
	Certified value by EUROVENT	EER *3	3.08		3.76
		ESEER *3 *4	4.71		-
	ESEER (Includes pump input based on EN14511) *3 *5		5.46		-
SEER (Includes pump input based on EN14511) *3		4.88		-	
IPLV *6		kW/kW	6.34		-
Water flow rate		m³/h	15.5		10.8
Cooling capacity *7 *8 Brine(ethylene glycol 35wt%)			kW	56.73	39.34
			kcal/h	48,788	33,832
			BTU/h	193,563	134,228
	Power input *2		kW	25.98	15.78
	Current input 380-400-415V		A	43.9 - 41.7 - 40.2	26.7 - 25.4 - 24.4
	EER(Pump input is not included)		2.18		2.49
	EER(Includes pump input based on EN14511) *3		2.10		2.42
	Brine flow rate	m³/h	11.5		8.0
Maximum current input			A	61	
Water pressure drop	Water *9	kPa	135	65	
	Brine(ethylene glycol 35wt%) *8 *10	kPa	106	50	
Temp range	Cooling	°C	Outlet water 5~25 *11		
	Water	°F	Outlet water 41~77 *11		
	Cooling	°C	Outlet brine -10~25 *8 *12		
	Brine(ethylene glycol 35wt%)	°F	Outlet brine 14~77 *8 *12		
	Outdoor	°C	-15~43 *11 *12		
		°F	5~109.4 *11 *12		
Circulating water volume range			m³/h	7.7~25.8	
Sound pressure level (measured in anechoic room) at 1m *1			dB (A)	65	63
Sound power level (measured in anechoic room) *1			dB (A)	77	75
Diameter of water pipe (Standard piping)	Inlet	mm (in)	50A (2B) housing type joint		
	Outlet	mm (in)	50A (2B) housing type joint		
Diameter of water pipe (Inside header piping)	Inlet	mm (in)	100A (4B) housing type joint		
	Outlet	mm (in)	100A (4B) housing type joint		
External finish			Polyester powder coating steel plate		
External dimension HxWxD			mm	2450 x 2250 x 900	
Net weight	Standard piping	kg (lbs)	957 (2110)		
	Inside header piping	kg (lbs)	992 (2187)		
Design pressure	R410A	MPa	4.15		
	Water	MPa	1.0		
Heat exchanger	Water side			Stainless steel plate and copper brazing	
	Air side			Plate fin and copper tube	
Compressor	Type			Inverter scroll hermetic compressor	
	Maker			MITSUBISHI ELECTRIC CORPORATION	
	Starting method			Inverter	
	Quantity			2	
	Motor output	kW	11.7 x 2		
	Case heater	kW	0.045 x 2		
	Lubricant			MEL32	
	Fan	Air flow rate	m³/min	77 x 6	
L/s			1283 x 6		
cfm			2719 x 6		
Type, Quantity		Propeller fan x 6			
Starting method		Inverter			
Motor output		kW	0.19 x 6		
Protection	High pressure protection		High pres.Sensor & High pres.Switch at 4.15MPa (601psi)		
	Inverter circuit		Over-heat protection, Over current protection		
	Compressor		Over-heat protection		

*1 Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F).

*2 Pump input is not included.

*3 Pump is not included in e-series.

*4 EN14511 standard (2013) formula is applied to figure out this value in case of fixed flow rate operation (flow rate is fixed at any heat load)

Pump input is included in cooling capacity for EER calculation. Condition of water inlet and outlet is fixed at inlet 12°C and outlet 7°C.

*5 EN14511 standard (2013) formula is applied to figure out this value in case of variable flow rate operation (flow rate varies per heat load).

Pump input is included in cooling capacity for EER calculation. Condition of water temperature : inlet water temperature varies due to fixed water flow rate and outlet is fixed at outlet 7°C.

*6 Calculations according to standard performances (in accordance with AHRI 550-590).

*7 Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet brine temp -5°C (23.0°F) inlet brine temp 0°C (32.0°F).

*8 Set the dipswitch SW3-6 on both main and sub modules to ON.

*9 Under normal cooling conditions capacity 90kW, water flow rate 15.5m³/h

*10 Under normal cooling conditions capacity 56.73kW, brine flow rate 11.5m³/h

*Please don't use the steel material for the water piping.

*Please always make water circulate, or pull the circulation water out completely when not in use.

*Please do not use groundwater or well water in direct.

*The water circuit must be closed circuit.

*Due to continuous improvement, the above specifications may be subject to change without notice.

Technical specifications HEATPUMP MODEL



MODEL		SET	EAHV-P900YAL(-N)(-BS) EAHV-P900YAF(-N)(-BS)	
Power source			3-phase 4-wire 380-400-415V 50/60Hz	
Capacity change mode			Capacity priority	COP priority
Cooling capacity ^{*1}		kW	90.00	63.00
		kcal/h	77,400	54,180
		BTU/h	307,080	214,956
	Power input ^{*3}	kW	27.27	16.27
	Current input 380-400-415V	A	46.0 - 43.7 - 42.2	27.5 - 26.1 - 25.2
	Pump input is not included	EER	3.30	3.87
		ESEER	5.66	-
	Certified value by EUROVENT	EER ^{*4}	2.94	3.76
		ESEER ^{*4 *6}	4.71	-
		ESEER (Includes pump input based on EN14511) ^{*4 *7}	5.46	-
Heating capacity ^{*2}		kW	90.00	63.00
		kcal/h	77,400	54,180
		BTU/h	307,080	214,956
	Power input ^{*3}	kW	25.71	16.96
	Current input 380-400-415V	A	43.4 - 41.2 - 39.7	28.6 - 27.2 - 26.2
	COP (Pump input is not included)		3.50	3.71
		COP (Includes pump input based on EN14511) ^{*4}	3.25	3.61
		SCOP (Reversible) Low/Medium (Includes pump input based on EN14511) ^{*4}	3.66/2.89	-
		Seasonal space heating energy efficiency class for medium-temperature application	A+	-
		Seasonal space heating energy efficiency class for low-temperature application	A+	-
Maximum current input		A	61	
Water pressure drop ^{*5}		kPa	135	65
Temp range	Cooling	°C	Outlet water 5~25 ^{*9}	
		°F	Outlet water 41~77 ^{*9}	
	Heating	°C	Outlet water 30~55 ^{*9}	
		°F	Outlet water 86~131 ^{*9}	
	Outdoor	°C	-15~43 ^{*9}	
Circulating water volume range		m³/h	7.7~25.8	
Sound pressure level (measured in anechoic room) at 1m ^{*1}		dB (A)	65	63
Sound power level (measured in anechoic room) ^{*1}		dB (A)	77	75
Diameter of water pipe (Standard piping)	Inlet	mm (in)	50A (2B) housing type joint	
	Outlet	mm (in)	50A (2B) housing type joint	
Diameter of water pipe (Inside header piping)	Inlet	mm (in)	100A (4B) housing type joint	
	Outlet	mm (in)	100A (4B) housing type joint	
External finish			Polyester powder coating steel plate	
External dimension HxWxD		mm	2450 x 2250 x 900	
Net weight	Standard piping	kg (lbs)	987 (2176)	
	Inside header piping	kg (lbs)	1022 (2253)	
Design pressure	R410A	MPa	4.15	
	Water	MPa	1.0	
Heat exchanger	Water side		Stainless steel plate and copper brazing	
	Air side		Plate fin and copper tube	
Compressor	Type		Inverter scroll hermetic compressor	
	Maker		MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter	
	Quantity		2	
	Motor output	kW	11.7 x 2	
	Case heater	kW	0.045 x 2	
	Lubricant		MEL32	
Fan	Air flow rate	m³/min	77 x 6	
		L/s	1283 x 6	
		cfm	2719 x 6	
	Type, Quantity		Propeller fan x 6	
	Starting method		Inverter	
Protection	High pressure protection		High pres.Sensor & High pres.Switch at 4.15MPa (601psi)	
	Inverter circuit		Over-heat protection, Over current protection	
	Compressor		Over-heat protection	

^{*1} Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F).

^{*2} Under normal heating conditions at outdoor temp 7°CDB/6°CWB (44.6°FDB/42.8°FWB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F).

^{*3} Pump input is not included.

^{*4} Pump is not included in e-series.

^{*5} Under normal cooling or heating conditions capacity 90kW, water flow rate 15.5m³/h

^{*6} EN14511 standard (2013) formula is applied to figure out this value in case of fixed flow rate operation (flow rate is fixed at any heat load)

Pump input is included in cooling capacity for EER calculation. Condition of water inlet and outlet is fixed at inlet 12°C and outlet 7°C.

^{*7} EN14511 standard (2013) formula is applied to figure out this value in case of variable flow rate operation (flow rate varies per heat load). Pump input is included in cooling capacity for EER calculation. Condition of water temperature : inlet water temperature varies due to fixed water flow rate and outlet is fixed at outlet 7°C.

^{*8} Calculations according to standard performances (in accordance with AHRI 550-590).

*Please don't use the steel material for the water piping.

*Please always make water circulate, or pull the circulation water out completely when not in use.

*Please do not use groundwater or well water in direct.

*The water circuit must be closed circuit.

*Due to continuous improvement, the above specifications may be subject to change without notice.

Technical specifications HEATING ONLY MODEL

MODEL		SET	EAHV-P900YAL-H(-N)(-BS) EAHV-P900YAF-H(-N)(-BS)	
Power source			3-phase 4-wire 380-400-415V 50/60Hz	
Capacity change mode			Capacity priority	COP priority
Heating capacity ^{*1}		kW	90.00	63.00
		kcal/h	77,400	54,180
		BTU/h	307,080	214,956
	Power input ^{*2}	kW	25.71	16.96
	Current input 380-400-415V	A	43.4 - 41.2 - 39.7	28.6 - 27.2 - 26.2
	COP (Pump input is not included)		3.50	3.71
	COP (Includes pump input based on EN14511) ^{*3}		3.25	3.61
	SCOP (Reversible) Low/Medium (Includes pump input based on EN14511) ^{*4}		3.56/2.83	-
	Seasonal space heating energy efficiency class for medium-temperature application		A+	-
	Seasonal space heating energy efficiency class for low-temperature application		A+	-
	Water flow rate	m ³ /h	15.5	10.8
Maximum current input		A	61	
Water pressure drop ^{*5}		kPa	135	65
Temp range	Heating	°C	Outlet water 30~55 ^{*6}	
		°F	Outlet water 86~131 ^{*6}	
	Outdoor	°C	-15~43 ^{*6}	
		°F	5~109.4 ^{*6}	
Circulating water volume range		m ³ /h	7.7~25.8	
Sound pressure level (measured in anechoic room) at 1m ^{*4}		dB (A)	65	63
Sound power level (measured in anechoic room) ^{*4}		dB (A)	77	75
Diameter of water pipe (Standard piping)	Inlet	mm (in)	50A (2B) housing type joint	
	Outlet	mm (in)	50A (2B) housing type joint	
Diameter of water pipe (Inside header piping)	Inlet	mm (in)	100A (4B) housing type joint	
	Outlet	mm (in)	100A (4B) housing type joint	
External finish			Polyester powder coating steel plate	
External dimension HxWxD		mm	2450 x 2250 x 900	
Net weight	Standard piping	kg (lbs)	987 (2176)	
	Inside header piping	kg (lbs)	1022 (2253)	
Design pressure	R410A	MPa	4.15	
	Water	MPa	1.0	
Heat exchanger	Water side		Stainless steel plate and copper brazing	
	Air side		Plate fin and copper tube	
Compressor	Type		Inverter scroll hermetic compressor	
	Maker		MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter	
	Quantity		2	
	Motor output	kW	11.7 x 2	
	Case heater	kW	0.045 x 2	
	Lubricant		MEL32	
Fan	Air flow rate	m ³ /min	77 x 6	
		L/s	1283 x 6	
		cfm	2719 x 6	
	Type, Quantity		Propeller fan x 6	
	Starting method		Inverter	
	Motor output	kW	0.19 x 6	
Protection	High pressure protection		High pres.Sensor & High pres.Switch at 4.15MPa (601psi)	
	Inverter circuit		Over-heat protection, Over current protection	
	Compressor		Over-heat protection	

^{*1} Under normal heating conditions at outdoor temp 7°CDB/6°CWB (44.6°FDB/42.8°FWB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F).

^{*2} Pump input is not included.

^{*3} Pump is not included in e-series.

^{*4} Under normal heating conditions at outdoor temp 7°CDB/6°CWB (44.6°FDB/42.8°FWB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F).

^{*5} Under normal heating conditions capacity 90kW, water flow rate 15.5m³/h

^{*6} Please don't use the steel material for the water piping material.

*Please always make water circulate, or pull the circulation water out completely when not in use.




*Please do not use groundwater or well water in direct.

*The water circuit must be closed circuit.


*Due to continuous improvement, the above specifications may be subject to change without notice.

Operating limits

COOLING ONLY

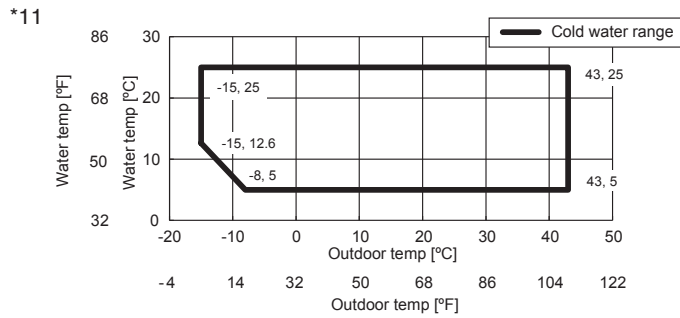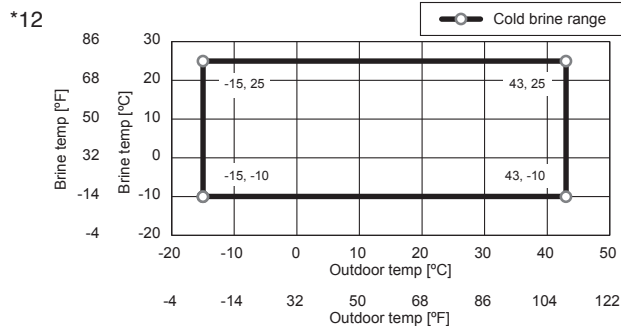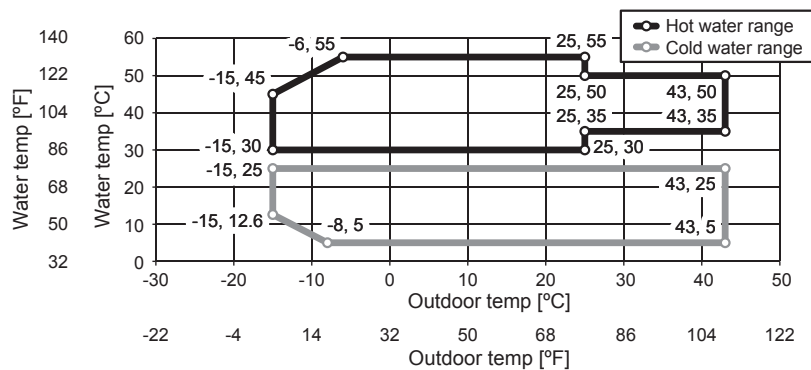COOLING ONLY -
BRINE MODEREVERSIBLE HEAT
PUMP

HEATING ONLY

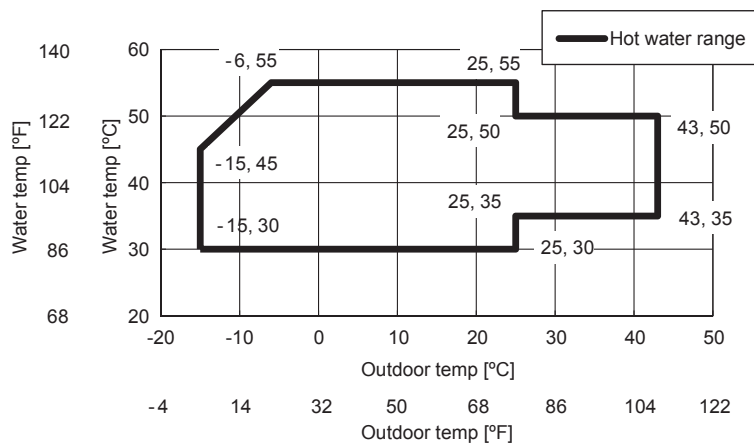

Unit converter

kcal/h = kW x 860
 BTU/h = kW x 3,412
 lbs = kg/0.4536
 cfm = m³/min x 35.31





P1500/P1800

R410A

e-series

KEY COMPONENTS
SAVE ENERGY

HIGH
FUNCTIONALITY
OF MODULAR
CHILLER

BEST IN CLASS
EFFICIENCY FOR
ENERGY SAVING
PERFORMANCE

OPTIMUM FREQUENCY
CONTROL

IMPROVED
REDUNDANCY &
RESILIENCE



High energy-saving performance thanks to high-performance inverter compressor and proprietary Y-shaped construction.

Best in class efficiency for energy saving performance

The rated and seasonal energy efficiency ratios have been increased to achieve high energy saving performance.

Rated efficiency

The use of the high-efficiency inverter compressors achieves high energy saving performance. The 50 HP model has cooling EER and heating COP rating corresponding to energy saving class A.

Model **P1500**
EER 3.19^{*1}

Model **P1500**
COP 3.29^{*2}

^{*1} Under normal cooling conditions at outdoor temp 35°DB/24°WB(95°FDB/75.2°FWB) outlet water temp 7°C(44.6°F) inlet water temp 12°C(53.6°F). Pump input is included in cooling capacity and power input based on EN14511.

^{*2} Under normal heating conditions at outdoor temp 7°DB/6°WB(44.6°FDB/42.8°FWB) outlet water temp 45°C(113°F) inlet water temp 40°C(104°F). Pump input is included in heating capacity and power input based on EN14511.

Seasonal efficiency

The use of the high-efficiency inverter compressors ensures optimum operation according to the operation load. The compressors can operate efficiently even during nighttime and intermediate seasons with low load, thereby saving energy throughout the year.

Model **P1500**
SEER 4.62^{*1}

Model **P1800**
SEER 4.58^{*1}


^{*1} Compliant with EN14511

Key components save energy

By controlling the frequency of the inverter compressors, the rated efficiency and the seasonal efficiency are higher. This achieves optimum energy saving according to the operation load.

Equipped with high-efficiency inverter compressors

Each unit is equipped with four high-efficiency inverter compressors, developed by Mitsubishi Electric. The four compressors operate as two pairs. The inverters observe the load and control the compressors so that they can optimally operate in one unit. The compressors use the IH warmer method. Heat is generated by the magnetic material characteristics of the motor core unit to prevent liquid refrigerant from remaining in the compressor when the unit stops. This reduces standby power compared to the crankcase heater method when the unit is stopped.

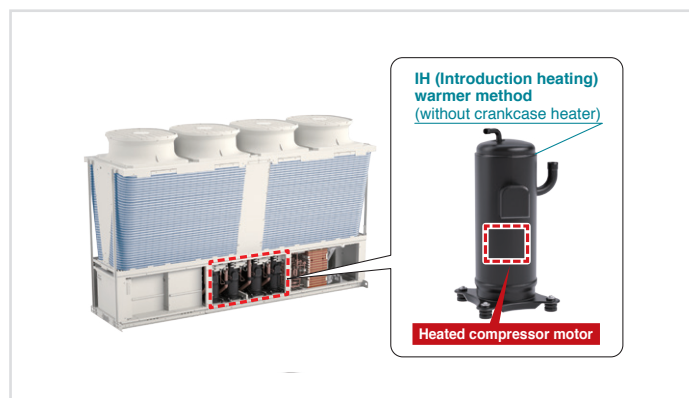

Use of Y-shape structure for effective operation

When the modules are connected, the intake air passages can be ensured on the floor and sides. This structure contributes to effective operation.



High functionality of modular chiller

The capacity among 1 group can be increased to up to 360 HP by combining units.


Large-capacity 50 HP and 60 HP units are available. Even a 360 HP system using six 60 HP units can be installed in a floor area of 8.53 m × 5.2 m including the service space

* Only modules with the same capacity can be combined.



Heat Pump	EAHV-P1500YBL(-N)
Heating Only	EAHV-P1500YBL-H(-N)
Cooling Only	EACV-P1500YBL(-N)


Heat Pump	EAHV-P1800YBL(-N)
Heating Only	EAHV-P1800YBL-H(-N)
Cooling Only	EACV-P1800YBL(-N)

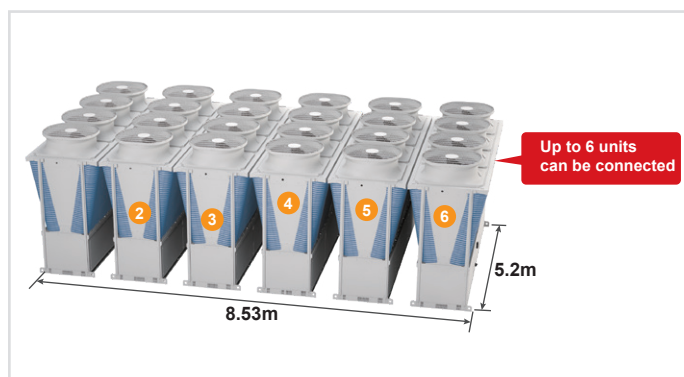

Optimum frequency control


When multiple modules are connected, the frequency of each inverter compressor is controlled during operation to increase the efficiency of each module, achieving a high energy saving performance.

This control can be implemented by simply using our unique M-NET control, without the need for any other on-site design.

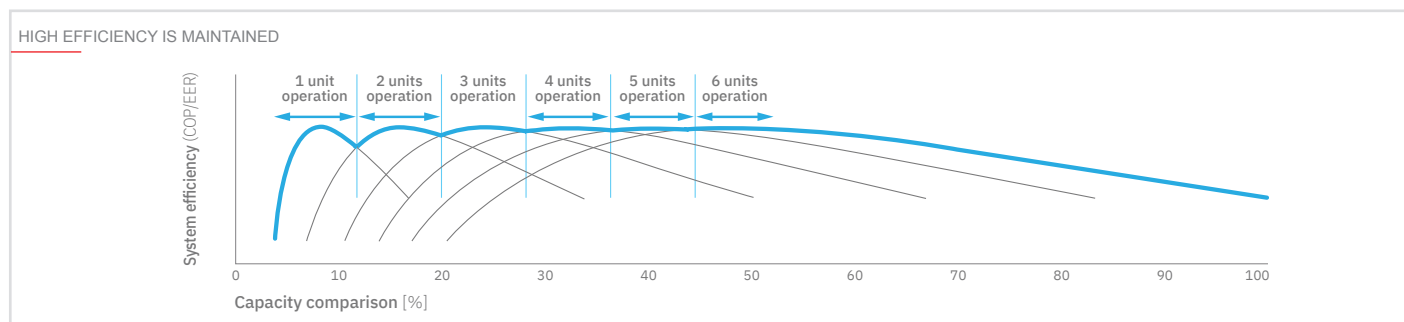


WHEN THE OVERALL SYSTEM LOAD IS 60%

Without optimum frequency control

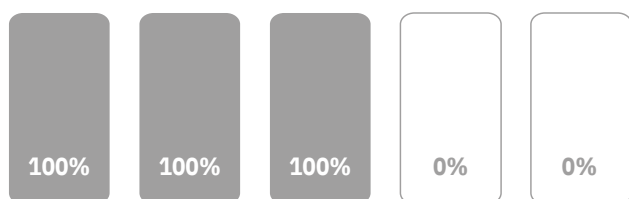

With non-inverter compressors, it is only possible to turn the unit on or off, and the compressor frequency cannot be adjusted according to the required capacity.


With optimum frequency control

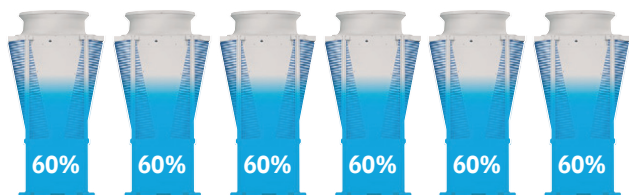

Our modules are equipped with inverter compressors, so the system can be operated in frequency ranges in which the efficiency of each module is at its peak. Optimum frequency control of each unit increases the efficiency of the whole system.


WHEN THE OVERALL SYSTEM LOAD IS 20%

Without optimum frequency control

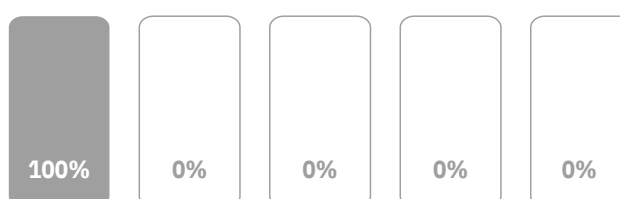

Since the compressors are running at inefficient frequencies, the efficiency of the whole system is lower.

With optimum frequency control


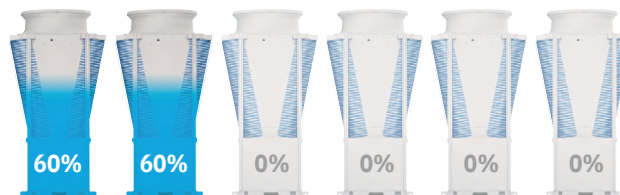


Peak efficiency is between 40 and 60%. In low load conditions, modules can be switched off to **keep remaining modules at optimum efficiency.**

The output of the pumps connected to the remaining group can be decreased, and the efficiency of the whole system is then increased. This control is achieved by connecting to M-NET. There is no need to prepare sensors, and the instrumentation is simple.

Improved redundancy & resilience


When a non-modular chiller is used as the main 300kW unit, as in this example, the same capacity would also be required as a backup. However, when a Mitsubishi Electric e-series modular chiller is used, two modules can still operate even if one module goes down, continuing normal operation. This reduces the backup capacity requirement.

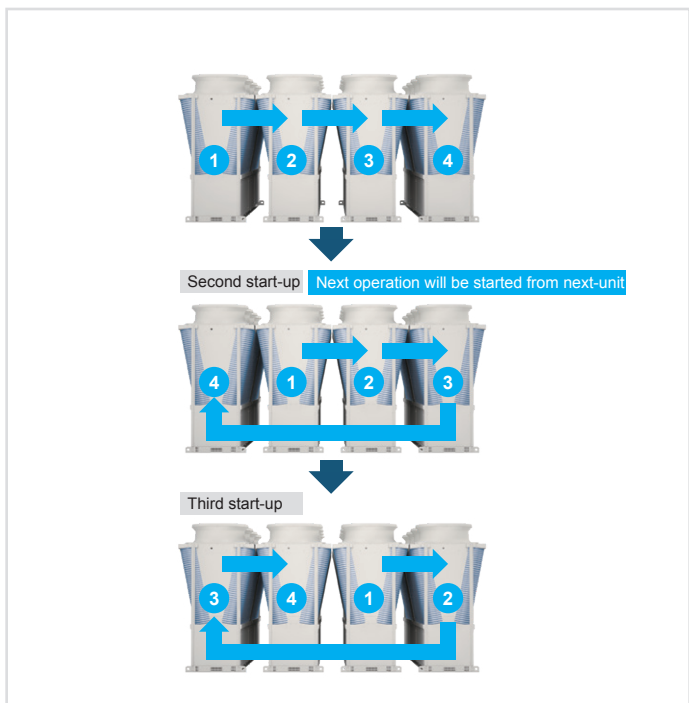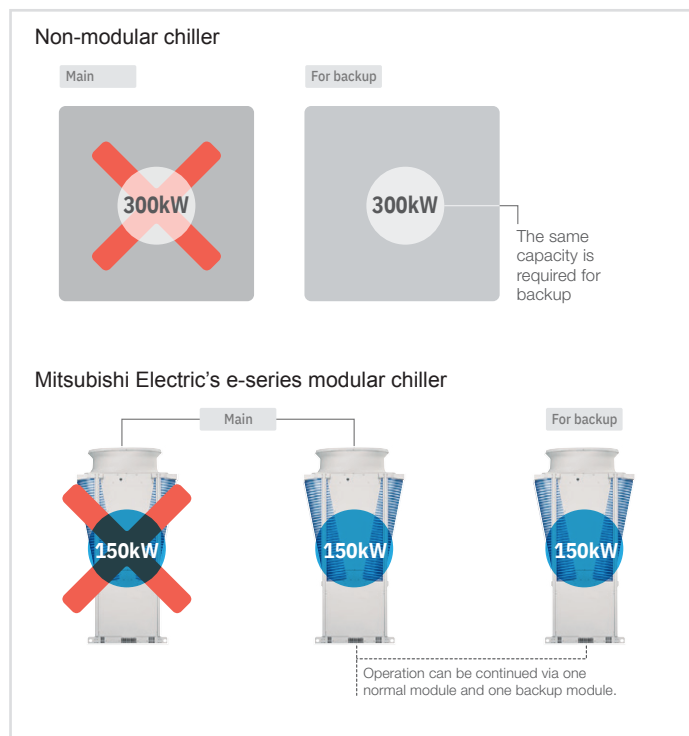

Emergency operation mode

■ When a single module

The e-series module contains four compressors (two for the 90kW module) developed by Mitsubishi Electric. The four compressors operate as two pairs. If something is wrong with one of the two pairs, the other pair can temporarily continue to operate. The 90kW module achieves this by operating its two compressors independently.

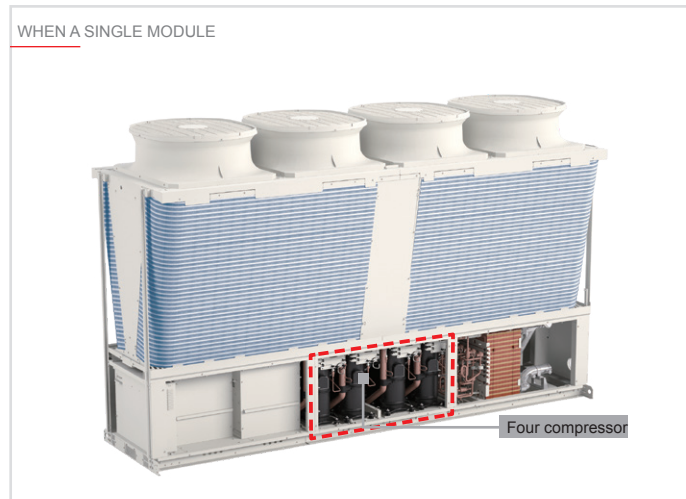

■ When multiple modules



If one of the e-series modules goes down, the remaining modules can continue to operate. Each module can independently control the outlet water temperature. Even if the main module goes down, operation can be continued.



Procedure for installing the connection kit


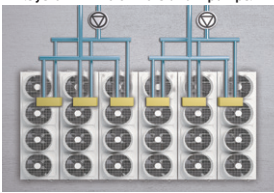
Selectable piping system

Standard piping and built-in header types are available. The optimum type can be selected according to the design and construction needs of the building.

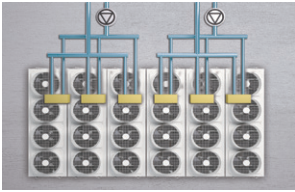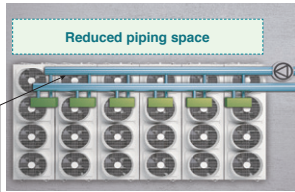STANDARD PIPING TYPE	BUILT-IN HEADER TYPE (models with "-N" in the name only)
<p>Type without built-in pump or header</p> 	<p>Type of built-in header piping for connection between modules</p> 
<p>Advantages</p> <p>The flexibility of design is high, and it is possible to select the most suitable number of pumps and water circuit for the on-site system.</p>	<p>Advantages</p> <p>The piping space and number of connections are reduced, allowing simple construction and short construction times.</p> <p>Advantages</p> <p>* It is not possible to build both the pump and the header in each unit.</p>


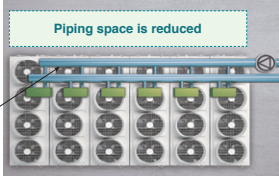
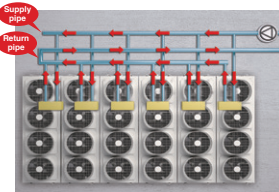
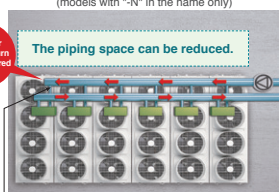
Standard piping type

The flexibility of design is high, and the system can be designed according to the on-site system and load pattern. Up to 24 units (4 groups × 6 units) can be connected to one system. The number of pumps and the piping structure can be designed according to the on-site.

STANDARD PIPING TYPE	
<p><System with 6 chillers and one pump></p> 	<p><System with 6 chillers and 2 pumps></p> 


Built-in header type

The piping to connect to other units is built into each unit. The number of piping connections is reduced (saving construction work and reducing the construction time), and the installation space can be also reduced.

BUILT-IN HEADER TYPE	
<p><Standard piping construction></p> 	<p><Built-in header type></p> <p>Piping space is reduced</p> 
<p>SPACE FOR RETURN PIPING IS NOT REQUIRED</p>	
<p><Standard piping construction></p> 	<p><Built-in header type> (models with "-N" in the name only)</p> <p>The piping space can be reduced.</p> 

Details of built-in header type modules

Up to six units with built-in headers can be connected. (Piping size: 150A)
When 6 units or a less are connected, flow adjustment and reverse return piping for each unit are unnecessary.

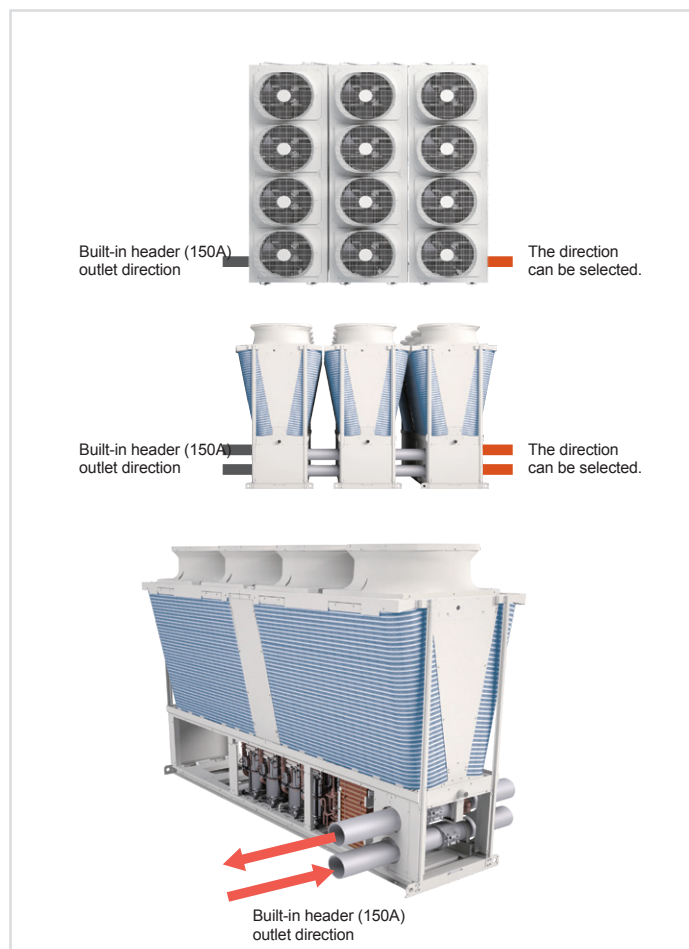


INSTALLATION OF PANELS


1 Install the panels on the end unit.

*Note: install panel S and then the closing panel.


2 Install panel B.

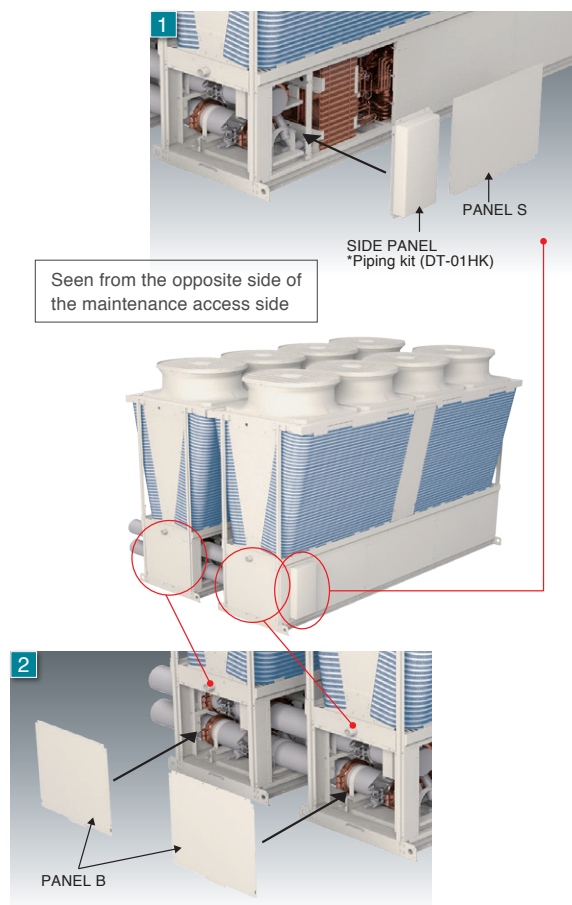

INSTALLATION OF END CONNECTION KIT (DT-01HK, EXCLUDING PANELS)

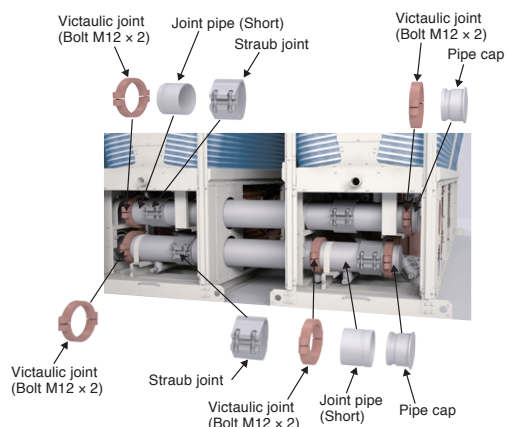


Optional parts ① (Piping Kit)
DT-01HK





INSTALLATION OF CONNECTION KIT (DT-02HK, EXCLUDING PANELS)

* Please remove the panels before installing the connection kit.

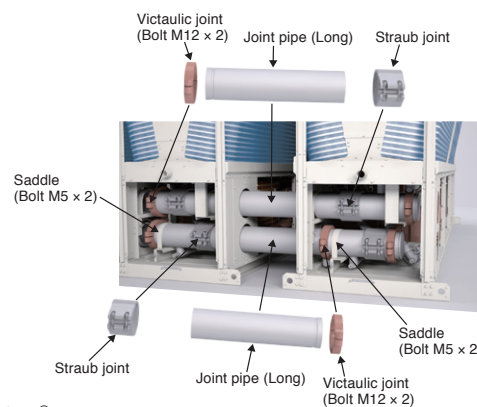

Optional parts ② (Connection Piping Kit)
DT-02HK



Control technology

You can perform basic operations, such as starting, stopping, mode switching, water temperature setting and schedule setting, by connecting a remote controller.




Operation/setting	ON/OFF
	Cooling/Heating/HeatingECO/Anti-freeze
	Snow/regular
	Demand
	Scheduled operation (daily/weekly)
Display	Operation mode
	Current water temperature
	Error code
Control function (function of chiller body)	Control of number of units Control to prevent simultaneous defrosting

External signal input

Basic operations, such as starting, stopping, mode switching and water temperature setting, can be performed by inputting external signals directly to the unit.

* Optional products, such as remote controllers, are not always required.

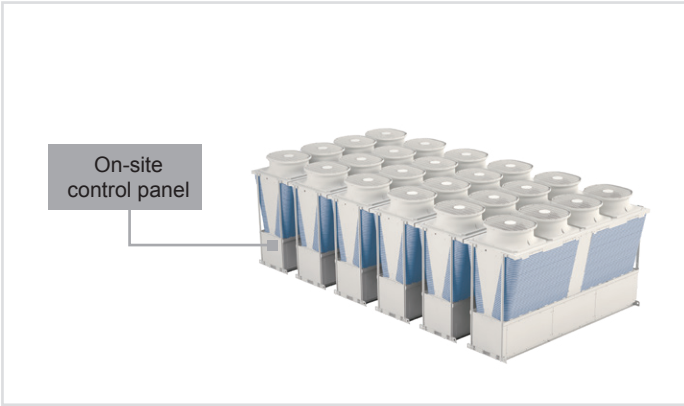

Input	ON/OFF
	Cooling/Heating
	Snow/regular
	Demand
	Target water temperature
Output	Operation mode
	Under operation
	Under defrosting
	Error
Control function (function of chiller)	Control of number of units Control to prevent simultaneous defrosting



Technical specifications COOLING ONLY MODEL



MODEL		SET	EACV-P1500YBL(-N)(-BS)	EACV-P1800YBL(-N)(-BS)
Power source			3-phase 4-wire 380-400-415V 50/60Hz	
Cooling capacity *1		kW	150.00	180.00
		kcal/h	129,000	154,800
		BTU/h	511,800	614,160
	Power input	kW	45.10	59.01
	EER		3.33	3.05
	IPLV *5		6.55	6.33
Cooling capacity(EN14511) *2	Water flow rate	m³/h	25.8	31.0
		kW	148.58	177.76
		kcal/h	127,779	152,874
		BTU/h	506,955	606,517
	Power input	kW	46.52	61.25
	EER		3.19	2.90
	Eurovent efficiency class		A	B
	ESEER *6		4.74	4.45
	SEER		4.62	4.58
Current input	Water flow rate	m³/h	25.8	31.0
	Cooling current 380-400-415V *1	A	77 - 73 - 70	
	Maximum current	A	111	
Water pressure drop *1		kPa	114	164
Temp range	Cooling	°C	Outlet water 5~30 *7	
		°F	Outlet water 41~86 *7	
	Outdoor	°C	-15~43 *6	
		°F	5~109.4 *6	
Circulating water volume range		m³/h	12.9~34.0	
Sound pressure level (measured in anechoic room) at 1m *1		dB (A)	66	68
Sound power level (measured in anechoic room) *1		dB (A)	84	86
Diameter of water pipe (Standard piping)	Inlet	mm (in)	65A (2 1/2B) housing type joint	
	Outlet	mm (in)	65A (2 1/2B) housing type joint	
Diameter of water pipe (Inside header piping)	Inlet	mm (in)	150A (6B) housing type joint	
	Outlet	mm (in)	150A (6B) housing type joint	
External finish			Polyester powder coating steel plate	
External dimension HxWxD		mm	2350 x 3400 x 1080	
Net weight	Standard piping	kg (lbs)	1240 (2734)	
	Inside header piping	kg (lbs)	1256 (2769)	
Design pressure	R410A	MPa	4.15	
	Water	MPa	1.0	
Heat exchanger	Water side		Stainless steel plate and copper brazing	
	Air side		Plate fin and copper tube	
Compressor	Type		Inverter scroll hermetic compressor	
	Maker		MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter	
	Quantity		4	
	Motor output	kW	11.7 x 4	
	Lubricant		MEL32	
Fan	Air flow rate	m³/min	265 x 4	
		L/s	4417 x 4	
		cfm	9357 x 4	
	Type, Quantity		Propeller fan x 4	
	Starting method		Inverter	
	Motor output	kW	0.94 x 4	
Protection	High pressure protection		High pres.Sensor & High pres.Switch at 4.15MPa (601psi)	
	Inverter circuit		Over-heat protection, Over current protection	
	Compressor		Over-heat protection	
Refrigerant *3	Type / GWP *4		R410A / 2088	
	Factory charged	Weight	kg	12.0
		CO2 equivalent *4	t	25.06
	Maximum additional charge	Weight	kg	48.0
		CO2 equivalent *4	t	100.23
	Total charge	Weight	kg	60.0
		CO2 equivalent *4	t	125.29
	Control		LEV	

*1 Under normal cooling conditions at outdoor temp 35°CDB/24°CWB(95°FDB/75.2°FWB) outlet water temp 7°C(44.6°F) inlet water temp 12°C(53.6°F). Pump input is not included in cooling capacity and power input.

*2 Under normal cooling conditions at outdoor temp 35°CDB/24°CWB(95°FDB/75.2°FWB) outlet water temp 7°C(44.6°F) inlet water temp 12°C(53.6°F). Pump input is included in cooling capacity and power input based on EN14511.

*3 Amount of factory-charged refrigerant is 3(kg) x 4. Please add the refrigerant at the field.

*4 These values are based on Regulation(EU) No.517 / 2014.

*5 IPLV is calculated in accordance with AHRI 550-590.

*6 ESEER is calculated in accordance with EUROVENT conditions.

*Please don't use the steel material for the water piping.

*Please always make water circulate, or pull the circulation water out completely when not in use.

*Please do not use groundwater or well water in direct.

*The water circuit must be closed circuit.

*Due to continuous improvement, the above specifications may be subject to change without notice.

*This model doesn't equip with a pump.

Technical specifications HEATPUMP MODEL



MODEL			SET	EAHV-P1500YBL(-N)(-BS)		EAHV-P1800YBL(-N)(-BS)		
Power source				3-phase 4-wire 380-400-415V 50/60Hz				
Cooling capacity ^{*1}			kW	150.00		180.00		
			kcal/h	129,000		154,800		
			BTU/h	511,800		614,160		
	Power input		kW	45.10		59.01		
	EER			3.33		3.05		
	IPLV ^{*7}			6.55		6.33		
	Water flow rate		m³/h	25.8		31.0		
Cooling capacity(EN14511) ^{*2}			kW	148.58		177.76		
			kcal/h	127,779		152,874		
			BTU/h	506,955		606,517		
	Power input		kW	46.52		61.25		
	EER			3.19		2.90		
	Eurovent efficiency class			A		B		
	ESEER ^{*8}			4.74		4.45		
	SEER			4.62		4.58		
	Water flow rate		m³/h	25.8		31.0		
	Heating capacity ^{*3}			kW	150.00		180.00	
			kcal/h	129,000		154,800		
			BTU/h	511,800		614,160		
Power input			kW	44.59		55.68		
COP				3.36		3.23		
Water flow rate			m³/h	25.8		31.0		
Heating capacity(EN14511) ^{*4}			kW	151.42		182.24		
			kcal/h	130,221		156,726		
			BTU/h	516,645		621,803		
	Power input		kW	46.01		57.92		
	COP			3.29		3.15		
	Eurovent efficiency class			A		B		
	SCOP (Reversible) Low/Medium				3.24 / 2.85			
	Water flow rate		m³/h	25.8		31.0		
Current input	Cooling current 380-400-415V ^{*1}		A		77 - 73 - 70			
	Heating current 380-400-415V ^{*3}		A		76 - 72 - 69			
	Maximum current		A		111			
	Water pressure drop ^{*1}		kPa	114		164		
Temp range	Cooling		°C		Outlet water 5~30 ^{*9}			
			°F		Outlet water 41~86 ^{*9}			
	Heating		°C		Outlet water 30~55 ^{*9}			
			°F		Outlet water 86~131 ^{*9}			
	Outdoor		°C		-15~43 ^{*9}			
			°F		5~109.4 ^{*9}			
Circulating water volume range				m³/h	12.9~34.0			
Sound pressure level (measured in anechoic room) at 1m ^{*1}				dB (A)	66	68		
Sound power level (measured in anechoic room) ^{*1}				dB (A)	64	86		
Diameter of water pipe (Standard piping)	Inlet		mm (in)	65A (2 1/2B) housing type joint				
	Outlet		mm (in)	65A (2 1/2B) housing type joint				
Diameter of water pipe (Inside header piping)	Inlet		mm (in)	150A (6B) housing type joint				
	Outlet		mm (in)	150A (6B) housing type joint				
External finish				Polyester powder coating steel plate				
External dimension HxWxD				mm	2350 x 3400 x 1080			
Net weight	Standard piping		kg (lbs)	1310 (2888)				
	Inside header piping		kg (lbs)	1326 (2923)				
Design pressure	R410A		MPa	4.15				
	Water		MPa	1.0				
Heat exchanger	Water side			Stainless steel plate and copper brazing				
	Air side			Plate fin and copper tube				
Compressor	Type			Inverter scroll hermetic compressor				
	Maker			MITSUBISHI ELECTRIC CORPORATION				
	Starting method			Inverter				
	Quantity			4				
	Motor output		kW	11.7 x 4				
	Lubricant			MEL32				
	Fan	Air flow rate		m³/min	265 x 4			
			L/s	4417 x 4				
			cfm	9357 x 4				
Type, Quantity				Propeller fan x 4				
Starting method				Inverter				
Motor output			kW	0.92 x 4				
Protection	High pressure protection			High pres.Sensor & High pres.Switch at 4.15MPa (601psi)				
	Inverter circuit			Over-heat protection, Over current protection				
	Compressor			Over-heat protection				
Refrigerant ^{*5}	Type / GWP ^{*6}			R410A / 2088				
	Factory charged	Weight	kg	12.0				
		CO2 equivalent ^{*6}	t	25.06				
	Maximum additional charge	Weight	kg	48.0				
		CO2 equivalent ^{*6}	t	100.23				
	Total charge	Weight	kg	60.0				
		CO2 equivalent ^{*6}	t	125.29				
	Control			LEV				

*1 Under normal cooling conditions at outdoor temp 35°DB/24°WB(95°FDB/75.2°FWB) outlet water temp 7°C(44.6°F) inlet water temp 12°C(53.6°F). Pump input is not included in cooling capacity and power input.

*2 Under normal cooling conditions at outdoor temp 35°DB/24°WB(95°FDB/75.2°FWB) outlet water temp 7°C(44.6°F) inlet water temp 12°C(53.6°F). Pump input is included in cooling capacity and power input based on EN14511.

*3 Under normal heating conditions at outdoor temp 7°DB/6°WB(44.6°FDB/42.8°FWB) outlet water temp 45°C(113°F) inlet water temp 40°C(104°F). Pump input is not included in heating capacity and power input.

*4 Under normal heating conditions at outdoor temp 7°DB/6°WB(44.6°FDB/42.8°FWB) outlet water temp 45°C(113°F) inlet water temp 40°C(104°F). Pump input is included in heating capacity and power input based on EN14511.

*5 Amount of factory-charged refrigerant is 3(kg) x 4. Please add the refrigerant at the field.

*6 These values are based on Regulation(EU) No.517 / 2014.

*7 IPLV is calculated in accordance with AHRI 550-590.

*8 ESEER is calculated in accordance with EUROVENT conditions.

*Please don't use the steel material for the water piping.

*Please always make water circulate, or pull the circulation water out completely when not in use.

*Please do not use groundwater or well water in direct.

*The water circuit must be closed circuit.

*Due to continuous improvement, the above specifications may be subject to change without notice.

*This model doesn't equip with a pump.

Technical specifications HEATYNG ONLY MODEL

MODEL		SET	EAHV-P1500YBL-H(-N)(-BS)	EAHV-P1800YBL-H(-N)(-BS)
Power source			3-phase 4-wire 380-400-415V 50/60Hz	
Heating capacity *1		kW	150.00	180.00
		kcal/h	129,000	154,800
		BTU/h	511,800	614,160
	Power input	kW	44.59	55.68
	COP		3.36	3.23
	Water flow rate	m³/h	25.8	31.0
Heating capacity (EN14511) *2		kW	151.42	182.24
		kcal/h	130,221	156,726
		BTU/h	516,645	621,803
	Power input	kW	46.01	57.92
	COP		3.29	3.15
	Eurovent efficiency class		A	B
	SCOP (Heating only) Low/Medium		3.20 / 2.83	
	Water flow rate	m³/h	25.8	31.0
		Heating current 380-400-415V *3	A	76 - 72 - 69
	Maximum current	A	111	
Water pressure drop *1		kPa	114	164
Temp range	Cooling	°C	Outlet water 30~55 *5	
		°F	Outlet water 86~131 *5	
	Outdoor	°C	-15~43 *4	
		°F	5~109.4 *4	
Circulating water volume range		m³/h	12.9~34.0	
Sound pressure level (measured in anechoic room) at 1m *1		dB (A)	66	67
Sound power level (measured in anechoic room) *1		dB (A)	84	86
Diameter of water pipe (Standard piping)	Inlet	mm (in)	65A (2 1/2B) housing type joint	
	Outlet	mm (in)	65A (2 1/2B) housing type joint	
Diameter of water pipe (Inside header piping)	Inlet	mm (in)	150A (6B) housing type joint	
	Outlet	mm (in)	150A (6B) housing type joint	
External finish			Polyester powder coating steel plate	
External dimension HxWxD		mm	2350 x 3400 x 1080	
Net weight	Standard piping	kg (lbs)	1310 (2888)	
	Inside header piping	kg (lbs)	1326 (2923)	
Design pressure	R410A	MPa	4.15	
	Water	MPa	1.0	
Heat exchanger	Water side		Stainless steel plate and copper brazing	
	Air side		Plate fin and copper tube	
Compressor	Type		Inverter scroll hermetic compressor	
	Maker		MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter	
	Quantity		4	
	Motor output	kW	11.7 x 4	
	Lubricant		MEL32	
Fan	Air flow rate	m³/min	265 x 4	
		L/s	4417 x 4	
		cfm	9357 x 4	
	Type, Quantity		Propeller fan x 4	
	Starting method		Inverter	
	Motor output	kW	0.94 x 4	
Protection	High pressure protection		High pres.Sensor & High pres.Switch at 4.15MPa (601psi)	
	Inverter circuit		Over-heat protection, Over current protection	
	Compressor		Over-heat protection	
Refrigerant *3	Type / GWP *4		R410A / 2088	
	Factory charged	Weight	kg	12.0
		CO2 equivalent *4	t	25.06
	Maximum additional charge	Weight	kg	48.0
		CO2 equivalent *4	t	100.23
	Total charge	Weight	kg	60.0
		CO2 equivalent *4	t	125.29
	Control		LEV	

*1 Under normal heating conditions at outdoor temp 7°CDB/6°CWB(44.6°FDB/42.8°FWB) outlet water temp 45°C(113°F) inlet water temp 40°C(104°F). Pump input is not included in heating capacity and power input.

*2 Under normal heating conditions at outdoor temp 7°CDB/6°CWB(44.6°FDB/42.8°FWB) outlet water temp 45°C(113°F) inlet water temp 40°C(104°F). Pump input is included in heating capacity and power input based on EN14511.

*3 Amount of factory-charged refrigerant is 3(kg) x 4. Please add the refrigerant at the field.

*4 These values are based on Regulation(EU) No.517 / 2014.

*Please don't use the steel material for the water piping.

*Please always make water circulate, or pull the circulation water out completely when not in use.

*Please do not use groundwater or well water in direct.


*The water circuit must be closed circuit.

*Due to continuous improvement, the above specifications may be subject to change without notice.


*This model doesn't equip with a pump.

Operating limits


COOLING ONLY

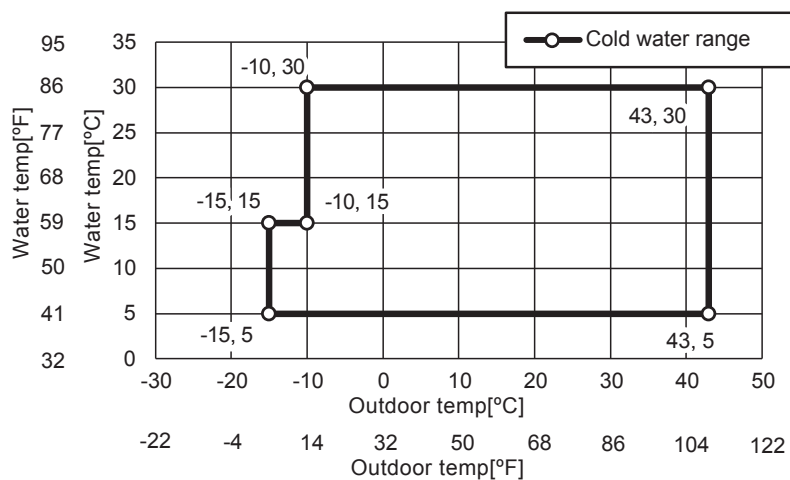

REVERSIBLE
HEAT PUMP

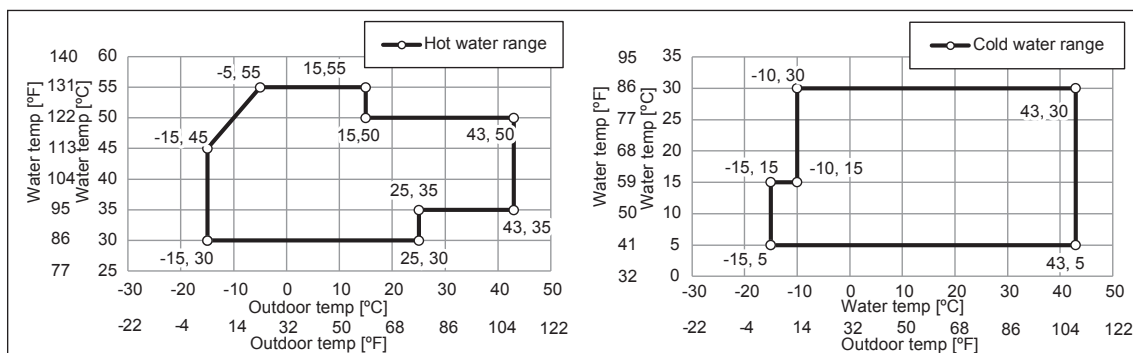

HEATING ONLY

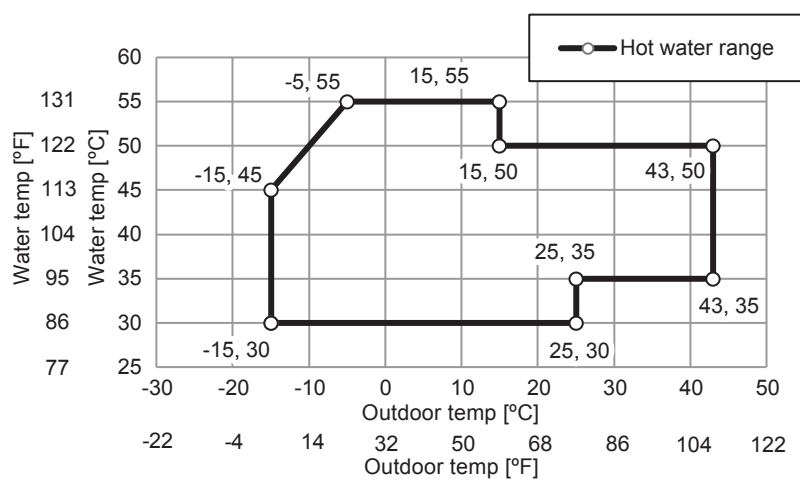

Unit converter

kcal/h = kW x 860
 BTU/h = kW x 3,412
 lbs = kg/0.4536
 cfm = m³/min x 35.31



M1500/M1800

NEW

R32

e-series

KEY COMPONENTS
SAVE ENERGY

HIGH FUNCTIONALITY
OF MODULAR CHILLERS


BEST IN CLASS
EFFICIENCY FOR
ENERGY SAVING
PERFORMANCE

WIDE OPERATING RANGE
BOTH IN COOLING AND
HEATING MODE

OPTIMUM FREQUENCY
CONTROL

LOW GWP REFRIGERANT R32
FOR REDUCED IMPACT ON
THE ENVIRONMENT

IMPROVED
REDUNDANCY &
RESILIENCE

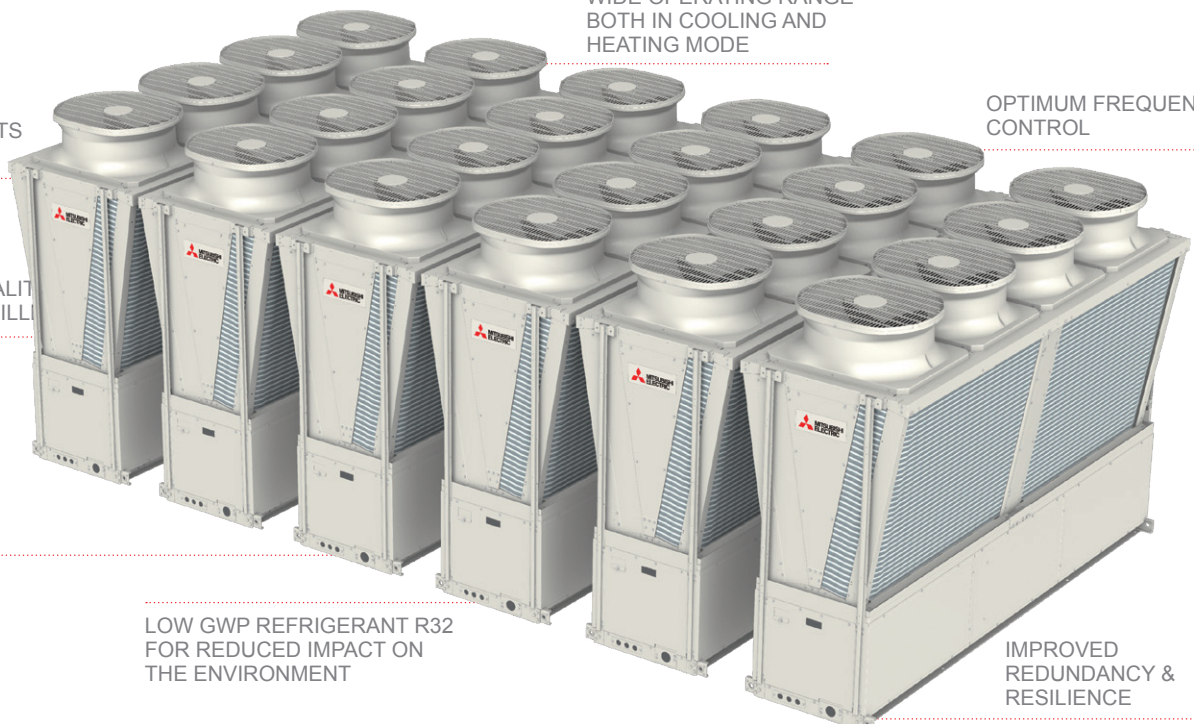

High energy-saving performance thanks to high-performance inverter compressor and proprietary Y-shaped construction.

Best in class efficiency for energy saving performance

The rated and seasonal energy efficiency ratios have been increased to achieve high energy saving performance.

Rated efficiency

The use of the high-efficiency inverter compressors achieves high energy saving performance. The 50 HP model has cooling EER and heating COP rating corresponding to energy saving class A.

Model M1500
EER 3.28^{*1}

Eurovent efficiency
class Rank A
achieved

Model M1500
COP 3.47^{*2}

^{*1} Under normal cooling conditions at outdoor temp 35°C/DB/24°C/WB(95°F/DB/75.2°F/WB) outlet water temp 7°C(44.6°F) inlet water temp 12°C(53.6°F). Pump input is included in cooling capacity and power input based on EN14511.

^{*2} Under normal heating conditions at outdoor temp 7°C/DB/6°C/WB(44.6°F/DB/42.8°F/WB) outlet water temp 45°C(113°F) inlet water temp 40°C(104°F). Pump input is included in heating capacity and power input based on EN14511.

Seasonal efficiency

The use of the high-efficiency inverter compressors ensures optimum operation according to the operation load. The compressors can operate efficiently even during nighttime and intermediate seasons with low load, thereby saving energy throughout the year.

Model M1500
SEER 5.52^{*1}
SCOP 3.31^{*1}

SEERavg. +18%
vs R410 version

Model M1800
SEER 5.36^{*1}
SCOP 3.31^{*1}

^{*1} Compliant with EN14511

Key Components and Technologies

The high-grade functionality, energy efficiency, and endurance of the e-series are achieved by Mitsubishi Electric's technology.

Compressor

R32-compatible high-efficiency inverter compressor


Each unit has four high-efficiency R32-compatible inverter compressors. Compared to R410A, R32 has low pressure loss, contributing to better operation efficiency. The inverter compressor automatically controls the compressor frequencies based on various air-conditioning conditions such as outside air temperature and changes in load, helping to achieve higher seasonal efficiency.



Stable operation with a suction chamber injection mechanism


Returning the liquid refrigerant to the suction chamber suppresses a rise in the discharge temperature of R32 while the units are operated at low outside temperatures. The amount of injected refrigerant is adjusted according to the refrigerant state, allowing the units to operate in heating mode at an intake temperature as low as -20°C.

IH (induction heating) warmer

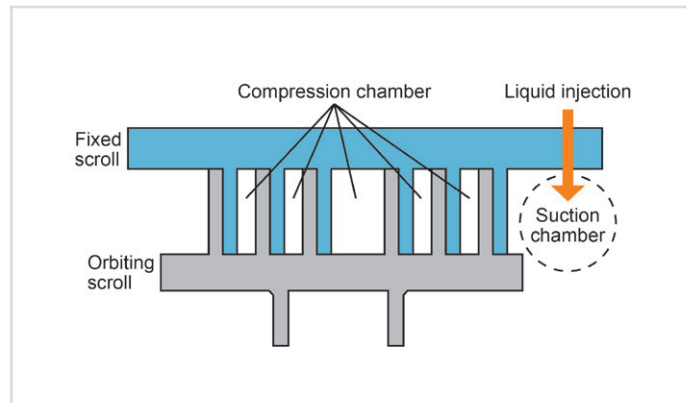

The e-series adopts an IH (induction heating) warmer to prevent refrigerant stagnation while the unit is stopped. The IH warmer suppresses standby power more than the belt case heater, which is wrapped around the compressor shell surface to constantly heat the compressor.

CASE HEATER




IH WARMER

The magnetic property of the iron motor core inside the compressor is used to heat the compressor shell and prevent refrigerant stagnation while the unit is stopped. In addition, compressor heating remains on for 30 minutes after operation is stopped, and subsequently is switched on and off every 30 minutes. Standby power consumption therefore is lower than a case heater.

Heated by energizing the motor

* Low voltage at a level that will not start up the compressor



Operation while the air conditioner is stopped

On/off is repeated every 30 minutes




* Normally the compressor is heated while the unit is stopped to prevent liquid refrigerant from remaining in the compressor and to evaporate the liquid refrigerant in the compressor.

Water heat exchanger


Reduction in head loss

Head loss in the water pipe is reduced by the use of a different water heat exchanger and by reducing the number of water piping routes in the unit.

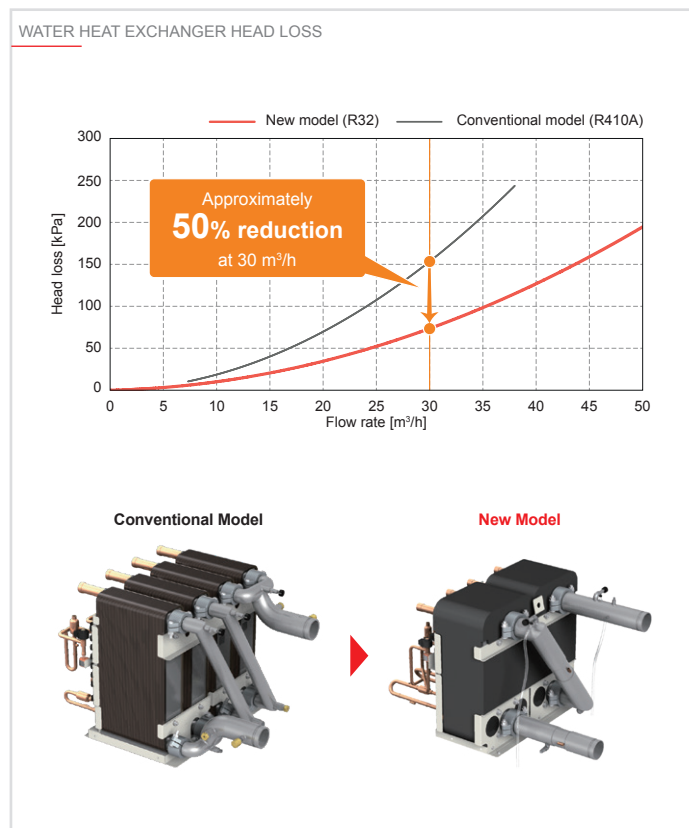

Water piping in the unit


- A water-release plug prevents water splashing when bleeding air.
- Separate air-vent valves are installed at both the inlet and outlet of the water pipes, allowing for easy water drainage just by plugging in and out the plugs.

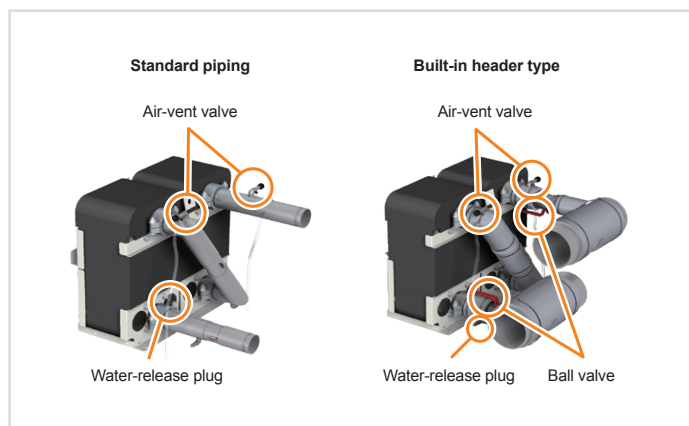


Flat tube heat exchanger

Flat tubes are sub-divided into smaller fins to increase the contact area with the refrigerant, resulting in greater heat-exchanging efficiency. The cooling only models and the heat pump models have fins that are shaped differently to increase the overall heat-exchange efficiency of each model, resulting in reduced refrigerant volume, greater operating range, and higher operation efficiency.

Conventional Model (R410A)




New Model (R32)

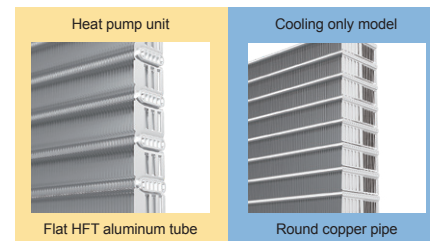

Parallel flow condenser


The heat pump and cooling only models adopt different fins in consideration of the influence of drain water clogging during heating. The heat pump model uses a horizontal flat tube and the cooling only model uses a parallel flow condenser.

The shape of the corrugated fin used in the cooling only model increases the contact area with air and the amount of heat exchange in cooling operation.

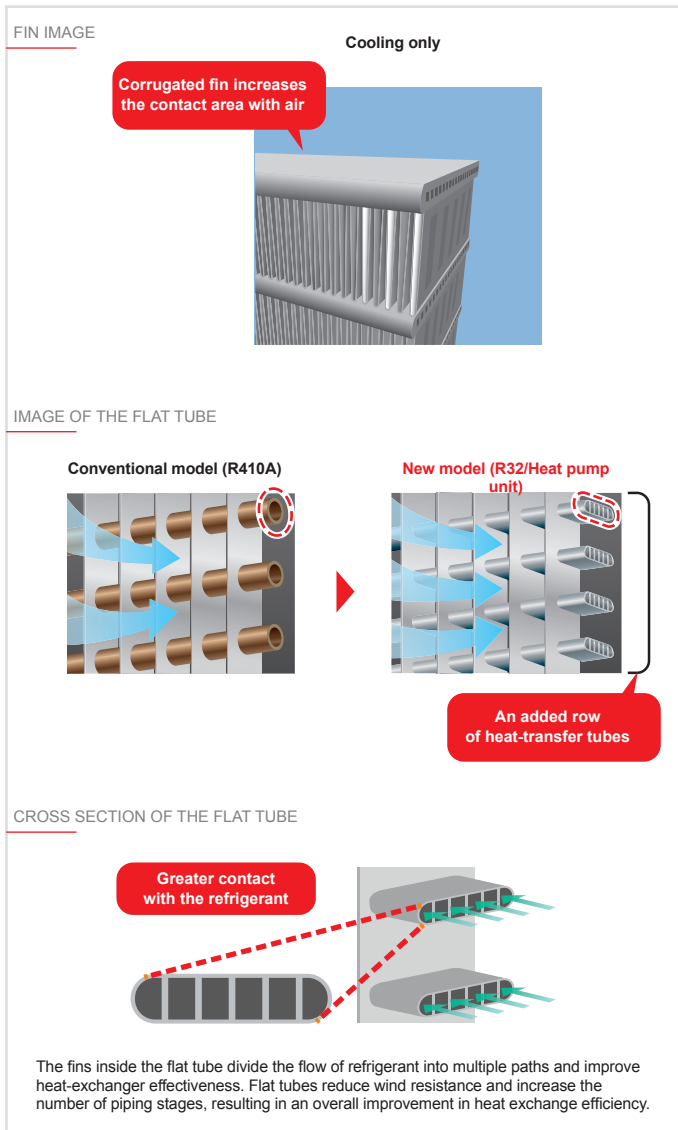

Use of Y-shape structure for effective operation

When the modules are connected, the intake air passages can be ensured on the floor and sides. This structure contributes to effective operation.

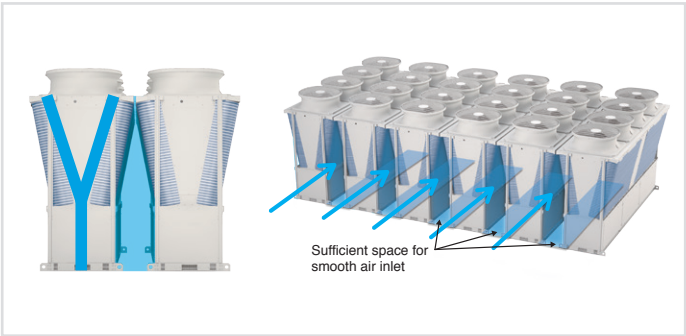

High functionality of modular chiller

The capacity among 1 group can be increased to up to 360 HP by combining units.


Large-capacity 50 HP and 60 HP units are available. Even a 360 HP system using six 60 HP units can be installed in a floor area of 8.53 m × 5.2 m including the service space

* Only modules with the same capacity can be combined.



Heat Pump	EAHV-M1500YCL(-N)
Cooling Only	EACV-M1500YCL(-N)


Heat Pump	EAHV-M1800YCL(-N)
Cooling Only	EACV-M1800YCL(-N)

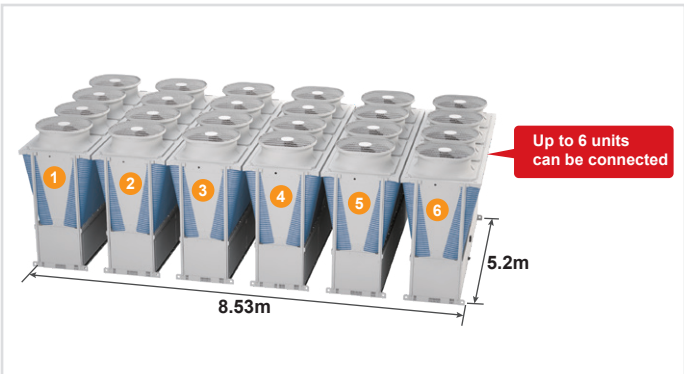

Optimum frequency control


When multiple modules are connected, the frequency of each inverter compressor is controlled during operation to increase the efficiency of each module, achieving a high energy saving performance.

This control can be implemented by simply using our unique M-NET control, without the need for any other on-site design.

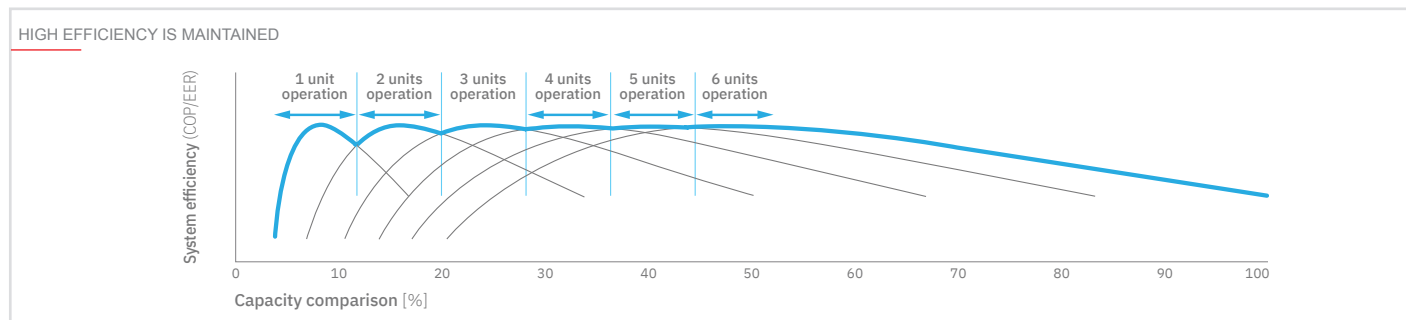


WHEN THE OVERALL SYSTEM LOAD IS 60%

Without optimum frequency control

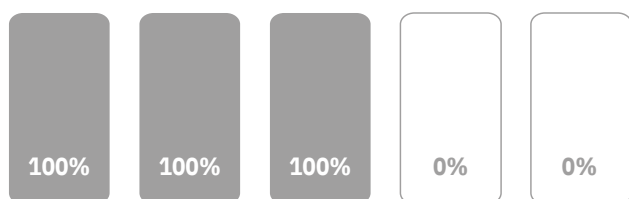

With non-inverter compressors, it is only possible to turn the unit on or off, and the compressor frequency cannot be adjusted according to the required capacity.


With optimum frequency control

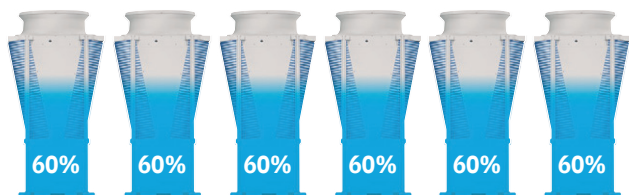

Our modules are equipped with inverter compressors, so the system can be operated in frequency ranges in which the efficiency of each module is at its peak. Optimum frequency control of each unit increases the efficiency of the whole system.

WHEN THE OVERALL SYSTEM LOAD IS 20%

Without optimum frequency control

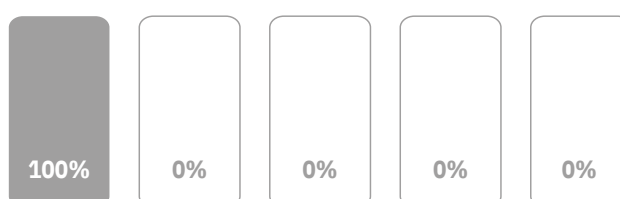

Since the compressors are running at inefficient frequencies, the efficiency of the whole system is lower.

With optimum frequency control





Peak efficiency is between 40 and 60%. In low load conditions, modules can be switched off to **keep remaining modules at optimum efficiency.**

The output of the pumps connected to the remaining group can be decreased, and the efficiency of the whole system is then increased. This control is achieved by connecting to M-NET. There is no need to prepare sensors, and the instrumentation is simple.

Improved redundancy & resilience


When a non-modular chiller is used as the main 300kW unit, as in this example, the same capacity would also be required as a backup. However, when a Mitsubishi Electric e-series modular chiller is used, two modules can still operate even if one module goes down, continuing normal operation. This reduces the backup capacity requirement.

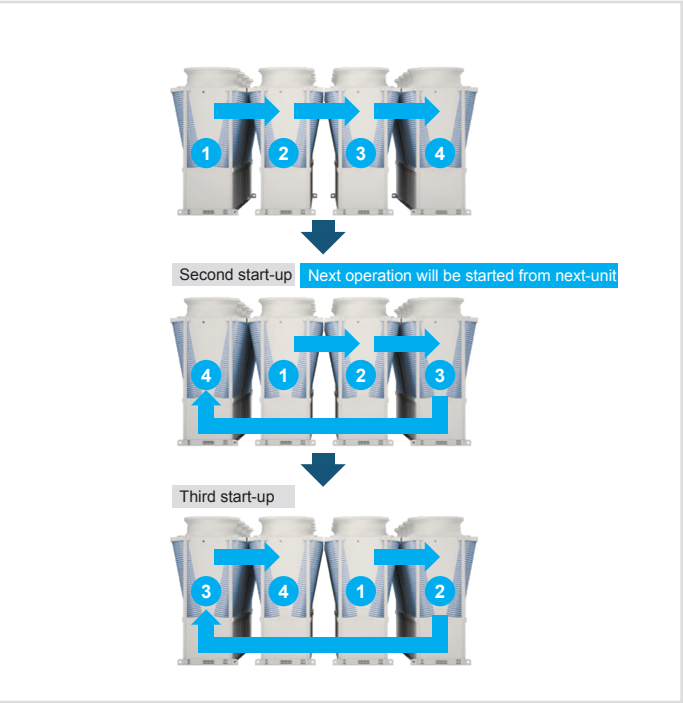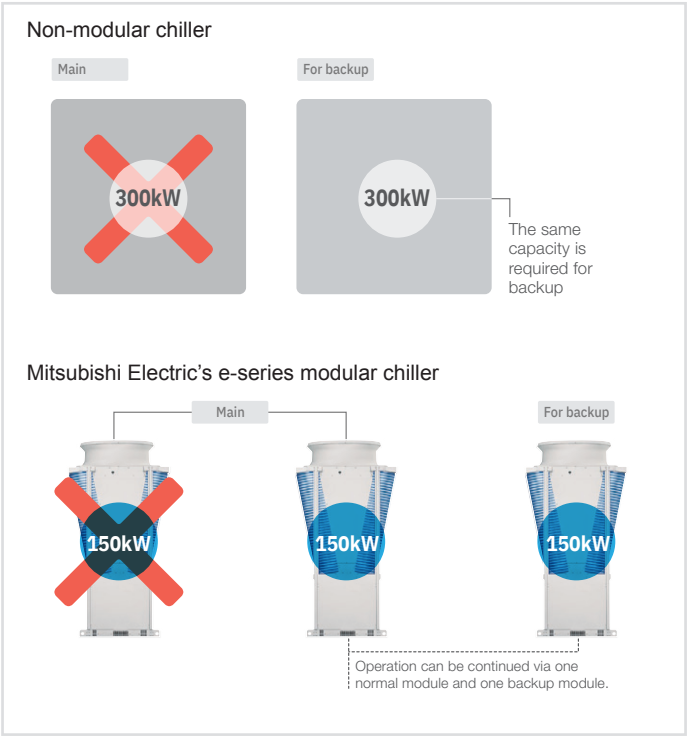

Emergency operation mode


When a single module

The e-series module contains four compressors (two for the 90kW module) developed by Mitsubishi Electric. The four compressors operate as two pairs. If something is wrong with one of the two pairs, the other pair can temporarily continue to operate. The 90kW module achieves this by operating its two compressors independently.

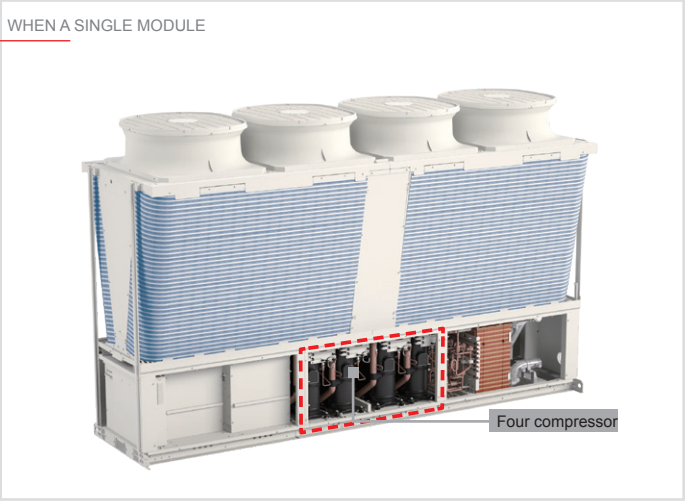

When multiple modules



If one of the e-series modules goes down, the remaining modules can continue to operate. Each module can independently control the outlet water temperature. Even if the main module goes down, operation can be continued.

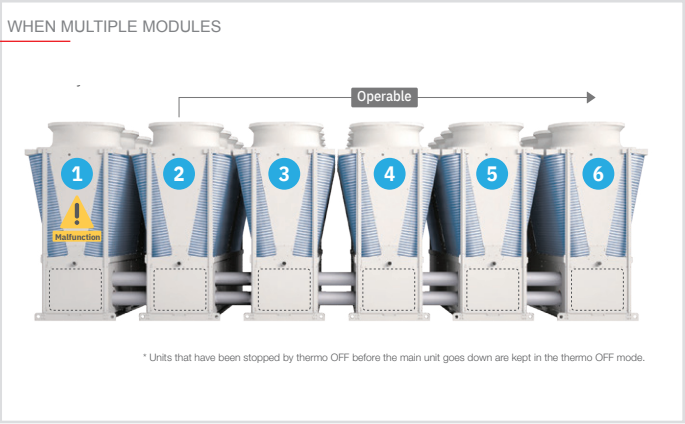

Procedure for installing the connection kit

Selectable piping system


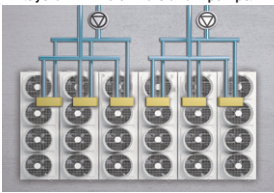
Standard piping and built-in header types are available. The optimum type can be selected according to the design and construction needs of the building.

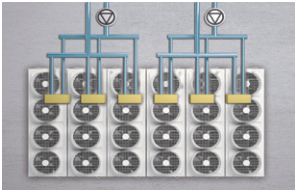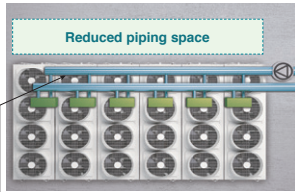STANDARD PIPING TYPE	BUILT-IN HEADER TYPE (models with "-N" in the name only)
<p>Type without built-in pump or header</p>  <p>Advantages The flexibility of design is high, and it is possible to select the most suitable number of pumps and water circuit for the on-site system.</p>	<p>Type of built-in header piping for connection between modules</p>  <p>Advantages The piping space and number of connections are reduced, allowing simple construction and short construction times. * It is not possible to build both the pump and the header in each unit.</p>

Standard piping type

The flexibility of design is high, and the system can be designed according to the on-site system and load pattern. Up to 24 units (4 groups × 6 units) can be connected to one system. The number of pumps and the piping structure can be designed according to the on-site.


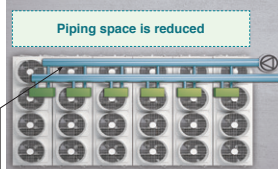
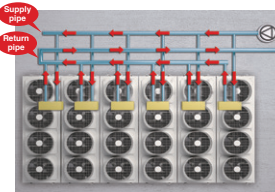
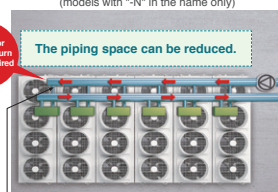
STANDARD PIPING TYPE

<p><System with 6 chillers and one pump></p> 	<p><System with 6 chillers and 2 pumps></p> 
--	---

Built-in header type

The piping to connect to other units is built into each unit. The number of piping connections is reduced (saving construction work and reducing the construction time), and the installation space can be also reduced.

BUILT-IN HEADER TYPE

<p><Standard piping construction></p>  <p>* Less space and equipment cost</p>	<p><Built-in header type></p>  <p>Piping space is reduced</p>
<p>SPACE FOR RETURN PIPING IS NOT REQUIRED</p>	
<p><Standard piping construction></p>  <p>* Reduced installation work</p>	<p><Built-in header type> (models with "-N" in the name only)</p>  <p>The piping space can be reduced.</p>


Details of built-in header type modules

Up to six units with built-in headers can be connected. (Piping size: 150A)
When 6 units or a less are connected, flow adjustment and reverse return piping for each unit are unnecessary.


Built-in header type

Header pipings, which are normally required for connecting the unit to local water pipes, are built into the unit. Multiple units are easily connectable by using optional parts. This eliminates the need to procure water pipes for connecting the units, and reduces installation work.

BUILT-IN HEADER TYPE

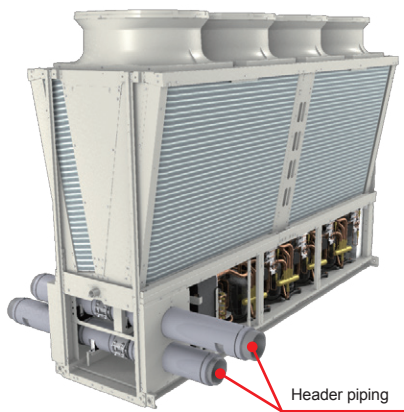


* This photo shows the angle from the piping side.

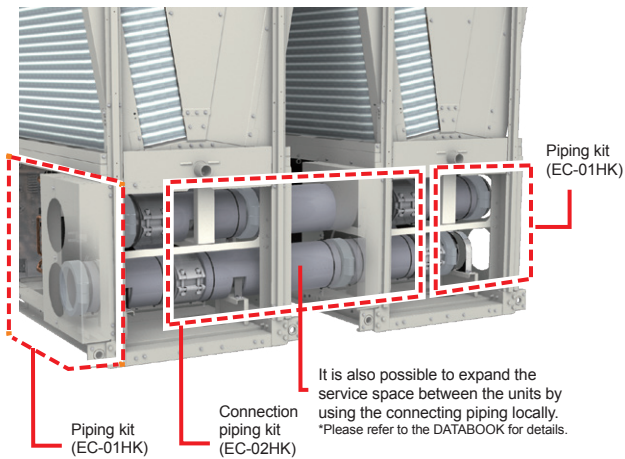


PARTS LIST

EC-01HK
Optional parts
(Piping kit)

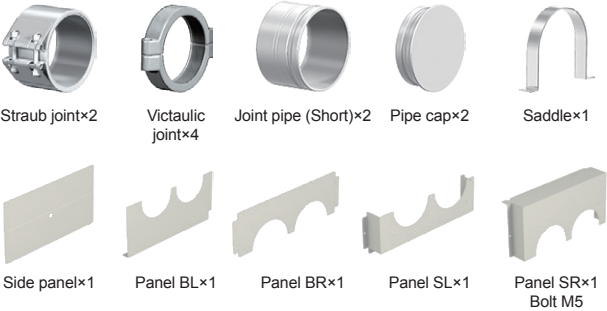


INSTALLING THE PIPING KIT (EC-01HK)

Header piping

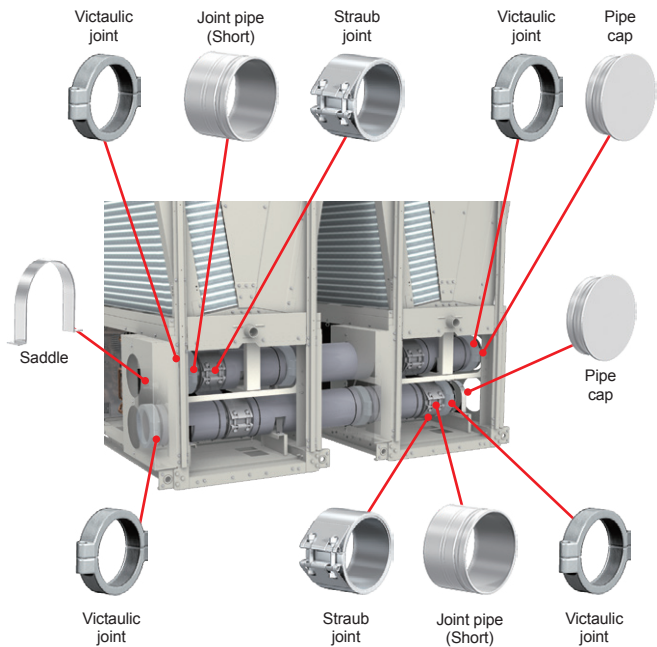


INSTALLING THE PIPING KIT (EC-01HK)

Panel

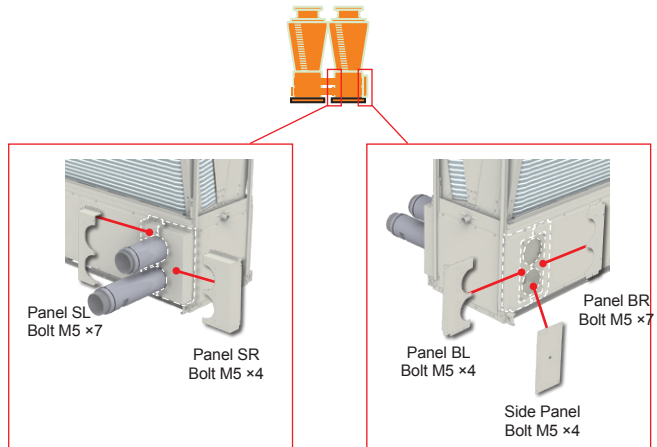


PARTS LIST

EC-02HK (Connection piping kit)

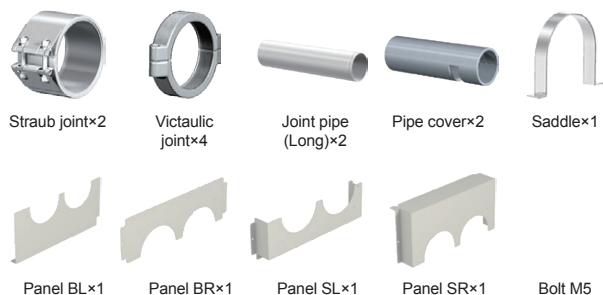


INSTALLING THE PIPING KIT (EC-02HK)

Header piping

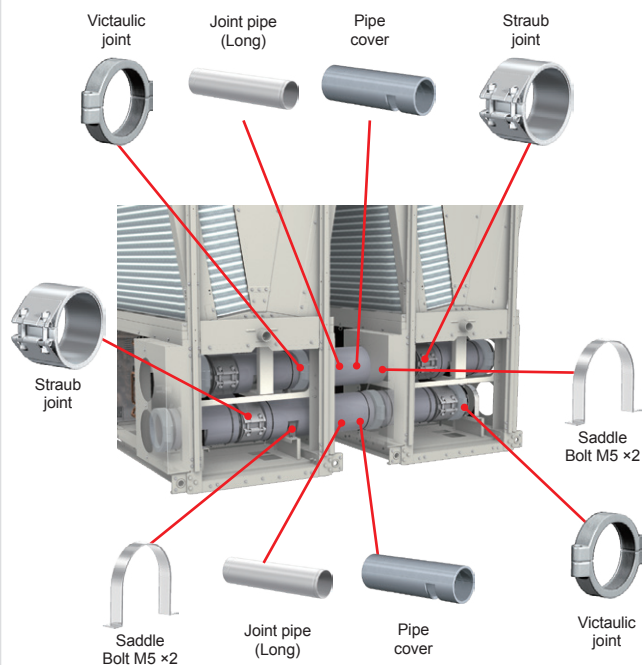

INSTALLING THE PIPING KIT (EC-02HK)

Panel

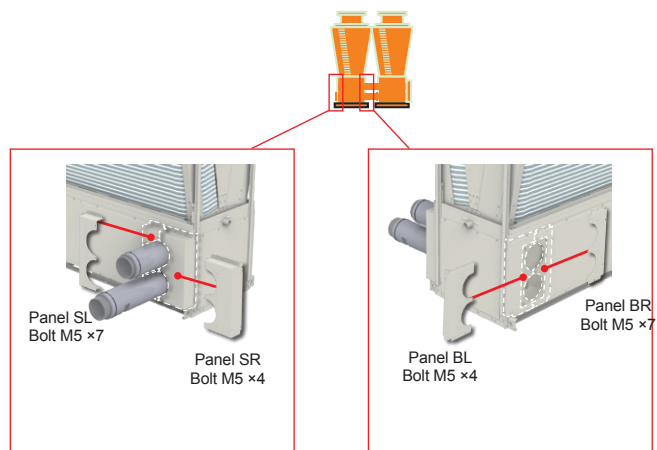

Easy control

The water temperature in each module can be controlled by using local remote controller PAR-W31MAA or by using centralized controller AE-200E. The control method can be selected at the request of each customer.



Remote controller
PAR-W31MAA



Centralized controller
AE-200E

External signal input

Basic operations, such as operation command, mode switching and water temperature setting, can be performed by inputting external signals directly to the unit.

* Optional products, such as remote controllers, are not always required.

On-site
control panel




Input	ON/OFF
	Cooling/Heating
	Snow/regular
	Demand
	Target water temperature
Output	Operation command
	Operation mode
	vError
Control function (function of chiller)	Control of number of units
	Control to prevent simultaneous defrosting


Remote controller

Basic operations, such as ON/OFF, mode switching, water temperature setting and schedule setting, can be performed by connecting a remote controller.

Operation/setting	ON/OFF
	Cooling/Heating/HeatingECO/Anti-freeze
	Snow/Normal
	Demand
	Scheduled operation (daily/weekly)
	Target temperature
Display	Operation mode
	Current water temperature
	Target temperature
	Error code
Control function (function of chiller body)	Control of number of units
	Control to prevent simultaneous defrosting

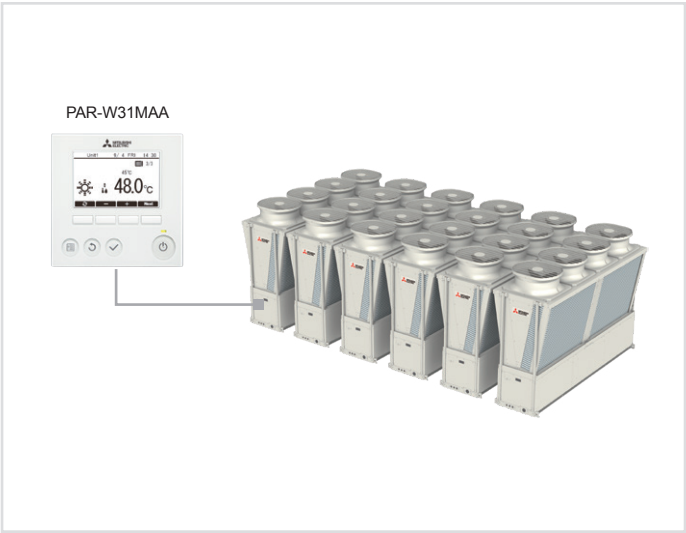

SYSTEM CONFIGURATION

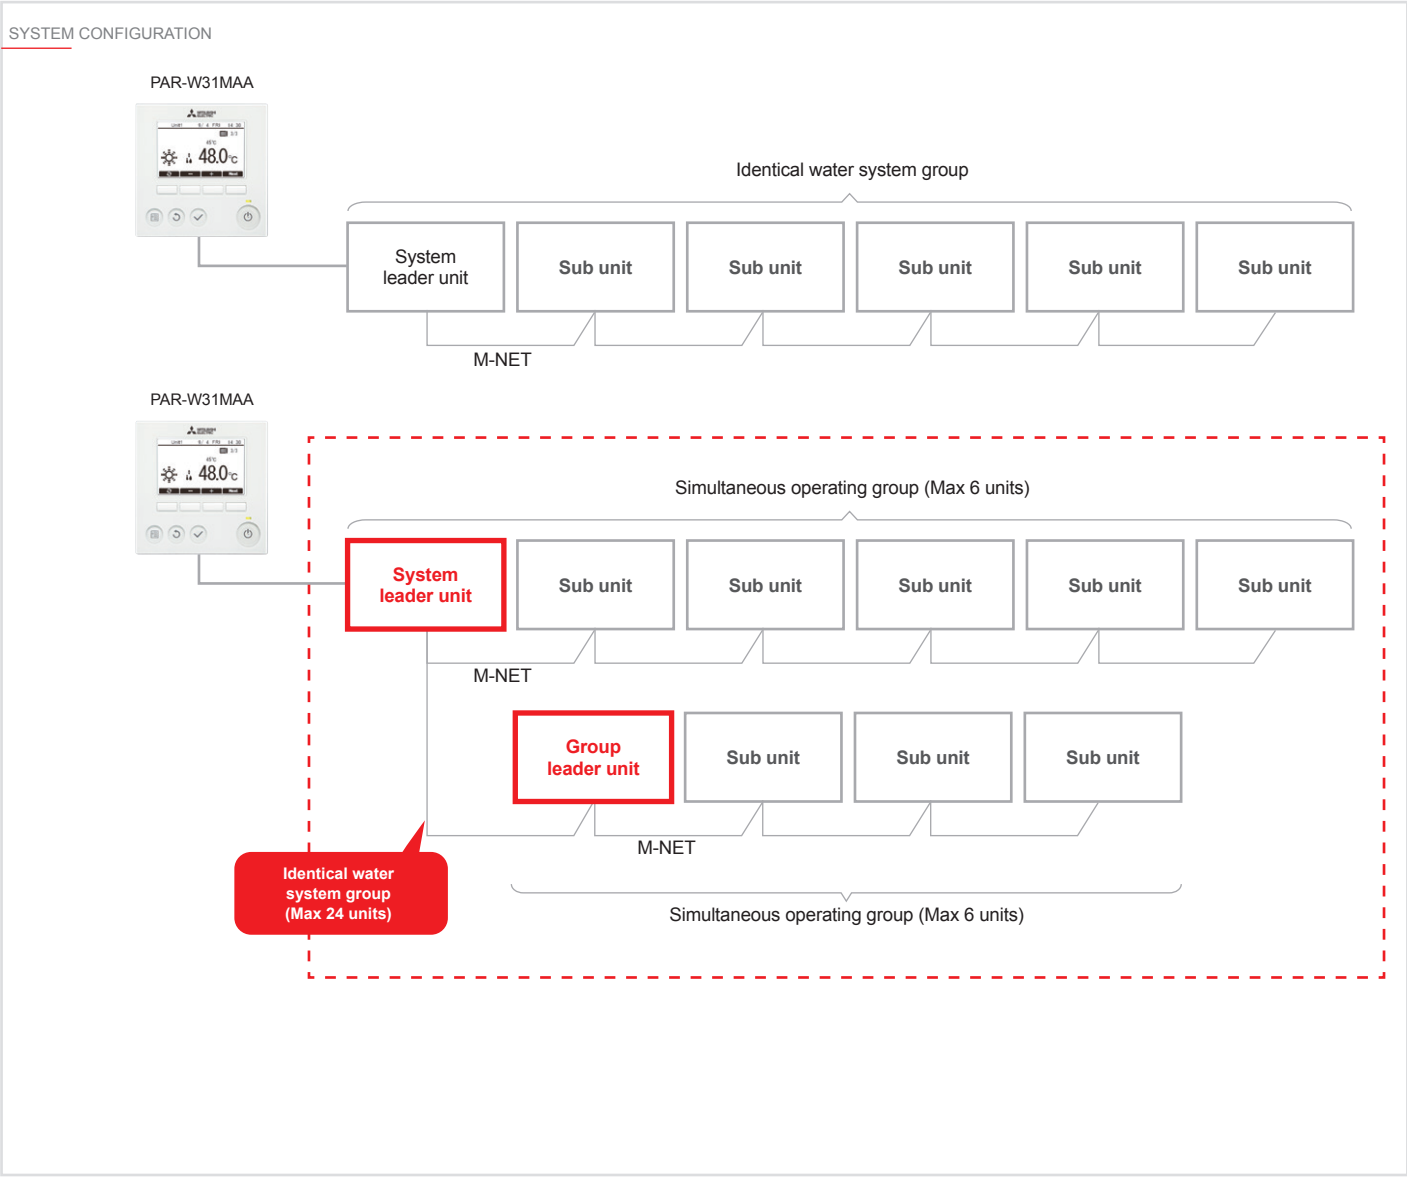

Centralized controller*

The e-series units are connectable to the AE-200E that centrally controls up to 24 units or 24 systems connected via M-NET.

By using EW-50E or AE-50E, the maximum number of connectable units can be further increased.

The use of AE-200E enables various operation settings and integrated control of the e-series and CITY MULTI.


*AE-200E with software Ver.7.80 or later can be connected.

Operation/setting	ON/OFF
	Cooling/Heating/HeatingECO/Anti-freeze
	Snow/Normal
	Scheduled operation (daily/weekly/annual)
	Target temperature
	Local control disabled (ON/OFF, operation mode, target temperature)
Display	WEB browser connected
	Operation mode
	Current water temperature
	Error code
Control function (function of chiller body)	Control of number of units
	Control to prevent simultaneous defrosting



Centralized controller
AE-200E

SYSTEM CONFIGURATION

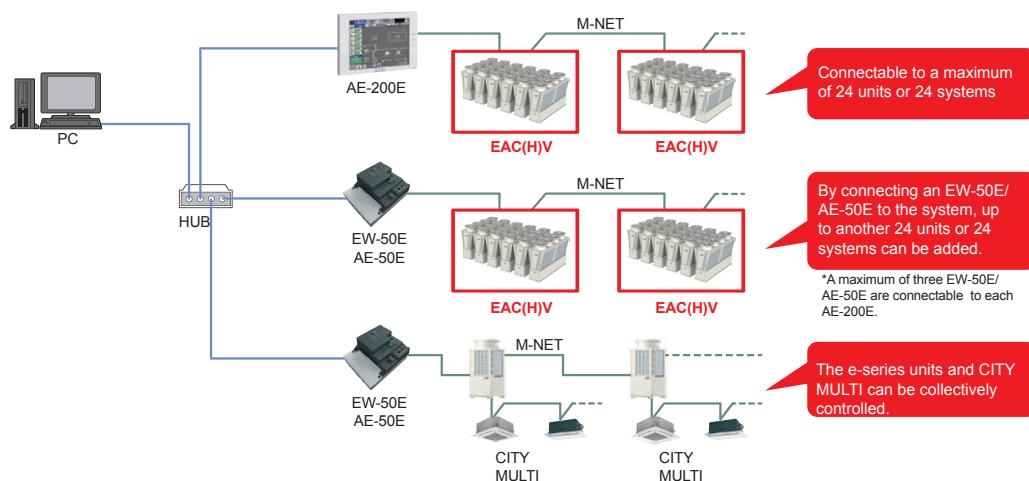

BACnet® connection function

Connectable to a central monitoring device via AE-200E using BACnet®

* BACnet® is a registered trademark of ASHRAE in the United States of America.

* BACnet® can be connected to AE-200E with software Ver.7.90 or later.

Operation/setting	ON/OFF
	Cooling/Heating/Heating ECO/Anti-freeze
	Snow/Normal
	Target water temperature
	Local control disabled (ON/OFF, operation mode, target temperature)
	ON/OFF
Display	Cooling/Heating/Heating ECO/Anti-freeze
	Snow/Normal
	Local control disabled (ON/OFF, operation mode, target temperature)
	Inlet/outlet water temperature
	Collective error
	Communication error
	Individual unit error

Technical specifications COOLING ONLY MODEL

MODEL		SET	EACV-M1500YCL(-N)(-BS)	EACV-M1800YCL(-N)(-BS)
Power source			3-phase 4-wire 380-400-415V 50/60Hz	
Cooling capacity *1		kW	150.00	180.00
		kcal/h	129,000	154,800
		BTU/h	511,800	614,160
	Power input	kW	44.73	57.02
	EER		3.35	3.16
	IPLV **		6.42	6.31
	Water flow rate	m ³ /h	25.8	31.0
Cooling capacity(EN14511) **2		kW	149.18	178.80
		kcal/h	128,295	153,768
		BTU/h	509,002	610,066
	Power input	kW	45.55	58.22
	EER		3.28	3.07
	Eurovent efficiency class		A	B
	SEER		5.52	5.36
	Water flow rate	m ³ /h	25.8	31.0
Current input	Cooling current 380-400-415V *1	A	76 - 72 - 69	96 - 91 - 88
	Maximum current	A	120	
Water pressure drop *1		kPa	55	78
Temp range	Cooling	°C	Outlet water 5~30 *5	
		°F	Outlet water 41~86 *5	
	Outdoor	°C	-15~52 *5	
		°F	5~125.6 *5	
Circulating water volume range		m ³ /h	12.9~34.0	
Sound pressure level (measured in anechoic room) at 1m *1		dB (A)	65	67
Sound power level (measured in anechoic room) *1		dB (A)	83	85
Diameter of water pipe (Standard piping)	Inlet	mm (in)	65A (2 1/2B) housing type joint	
	Outlet	mm (in)	65A (2 1/2B) housing type joint	
Diameter of water pipe (Inside header piping)	Inlet	mm (in)	150A (6B) housing type joint	
	Outlet	mm (in)	150A (6B) housing type joint	
External finish			Polyester powder coating steel plate	
External dimension HxWxD		mm	2350 x 3400 x 1080	
Net weight	Standard piping	kg (lbs)	1039 (2291)	
	Inside header piping	kg (lbs)	1067 (2352)	
Design pressure	R410A	MPa	4.15	
	Water	MPa	1.0	
Heat exchanger	Water side		Stainless steel plate and copper brazing	
	Air side		Salt-resistant corrugated fin & aluminium micro channel	
Compressor	Type		Inverter scroll hermetic compressor	
	Maker		MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter	
	Quantity		4	
	Motor output	kW	11.7 x 4	
	Lubricant		MEL46EH	
Fan	Air flow rate	m ³ /min	270 x 4	
		L/s	4500 x 4	
		cfm	9534 x 4	
	Type, Quantity		Propeller fan x 4	
	Starting method		Inverter	
	Motor output	kW	0.92 x 4	
Protection	High pressure protection		High pres.Sensor & High pres.Switch at 4.15MPa (601psi)	
	Inverter circuit		Over-heat protection, Over current protection	
	Compressor		Over-heat protection	
Refrigerant *3	Type x charge		R32 x 4.7 (kg) x 4 *3	
	Control		LEV	

*1 Under normal cooling conditions at outdoor temp 35°C DB / 24°C WB (95°F DB / 75.2°F WB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is not included in cooling capacity and power input.

*2 Under normal cooling conditions at outdoor temp 35°C DB / 24°C WB (95°F DB / 75.2°F WB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is included in cooling capacity and power input based on EN14511.

*3 Amount of factory-charged refrigerant is 3 (kg) x 4. Please add the refrigerant at the field.

*4 IPLV is calculated in accordance with AHRI 550-590.

*Please don't use the steel material for the water piping.

*Please always make water circulate, or pull the circulation water out completely when not in use.

*Please do not use groundwater or well water directly.

*The water circuit must be closed circuit.

*Due to continuous improvement, the above specifications may be subject to change without notice.

*This model is not equipped with a pump.

Technical specifications HEATPUMP MODEL

MODEL		SET	EAHV-M1500YCL(-N)(-BS)	EAHV-M1800YCL(-N)(-BS)	
Power source			3-phase 4-wire 380-400-415V 50/60Hz		
Cooling capacity * ¹		kW	150.00	180.00	
		kcal/h	129,000	154,800	
		BTU/h	511,800	614,160	
	Power input	kW	44.73	57.02	
	EER		3.35	3.16	
	IPLV * ⁶		6.42	6.31	
	Water flow rate	m³/h	25.8	31.0	
Cooling capacity(EN14511) * ²		kW	149.18	178.80	
		kcal/h	128,295	153,768	
		BTU/h	509,002	610,066	
	Power input	kW	45.55	58.22	
	EER		3.28	3.07	
	Eurovent efficiency class		A	B	
	SEER		5.52	5.36	
	Water flow rate	m³/h	25.8	31.0	
	Heating capacity * ³		kW	150.00	180.00
		kcal/h	129,000	154,800	
		BTU/h	511,800	614,160	
Power input		kW	42.61	53.09	
COP			3.52	3.39	
Water flow rate		m³/h	25.8	31.0	
Heating capacity(EN14511) * ⁴			kW	150.82	181.20
		kcal/h	129,705	155,832	
		BTU/h	514,598	618,254	
	Power input	kW	43.43	54.29	
	COP		3.47	3.34	
	SCOP Low temp. application/Medium temp. applic.		3.31 / 2.88		
	Water flow rate	m³/h	25.8	31.0	
	Current input	Cooling current 380-400-415V * ¹	A	76 - 72 - 69	96 - 91 - 88
		Heating current 380-400-415V * ³	A	72 - 68 - 66	90 - 85 - 82
Maximum current		A	120		
Water pressure drop * ¹		kPa	55	78	
Temp range	Cooling	°C	Outlet water 4~30 * ⁷		
		°F	Outlet water 39.2~86 * ⁷		
	Heating	°C	Outlet water 25~55 * ⁷		
		°F	Outlet water 77~131 * ⁷		
	Outdoor (Cooling)	°C	-15~52 * ⁷		
		°F	5~125.6 * ⁷		
	Outdoor (Heating)	°C	-20~43 * ⁷		
°F		-4~109.4 * ⁷			
Circulating water volume range		m³/h	12.9~34.0		
Sound pressure level (measured in anechoic room) at 1m * ¹		dB (A)	65	67	
Sound power level (measured in anechoic room) * ¹		dB (A)	83	85	
Diameter of water pipe (Standard piping)	Inlet	mm (in)	65A (2 1/2B) housing type joint		
	Outlet	mm (in)	65A (2 1/2B) housing type joint		
Diameter of water pipe (Inside header piping)	Inlet	mm (in)	150A (6B) housing type joint		
	Outlet	mm (in)	150A (6B) housing type joint		
External finish			Polyester powder coating steel plate		
External dimension HxWxD		mm	2350 x 3400 x 1080		
Net weight	Standard piping	kg (lbs)	1280 (2822)		
	Inside header piping	kg (lbs)	1307 (2881)		
Design pressure	R410A	MPa	4.15		
	Water	MPa	1.0		
Heat exchanger	Water side		Stainless steel plate and copper brazing		
	Air side		Plate fin and copper tube		
Compressor	Type		Inverter scroll hermetic compressor		
	Maker		MITSUBISHI ELECTRIC CORPORATION		
	Starting method		Inverter		
	Quantity		4		
	Motor output	kW	11.5 x 4		
	Lubricant		MEL46EH		
Fan	Air flow rate	m³/min	270 x 4		
		L/s	4500 x 4		
		cfm	9534 x 4		
	Type, Quantity		Propeller fan x 4		
	Starting method		Inverter		
	Motor output	kW	0.92 x 4		
	External static press.	Pa	20		
Protection	High pressure protection		High pres.Sensor & High pres.Switch at 4.15MPa (601psi)		
	Inverter circuit		Over-heat protection, Over current protection		
	Compressor		Over-heat protection		
Refrigerant * ⁵	Type x charge		R32 x 11.5 (kg) x 4 * ⁵		
	Control		LEV		

*1 Under normal cooling conditions at outdoor temp 35°C DB / 24°C WB (95°F DB / 75.2°F WB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is not included in cooling capacity and power input.

*2 Under normal cooling conditions at outdoor temp 35°C DB / 24°C WB (95°F DB / 75.2°F WB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is included in cooling capacity and power input based on EN14511.

*3 Under normal heating conditions at outdoor temp 7°C DB / 6°C WB (44.6°F DB / 42.8°F WB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F). Pump input is not included in heating capacity and power input.

*4 Under normal heating conditions at outdoor temp 7°C DB / 6°C WB (44.6°F DB / 42.8°F WB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F). Pump input is included in heating capacity and power input based on EN14511.

*5 Amount of factory-charged refrigerant is 3 (kg) x 4. Please add the refrigerant at the field.

*6 IPLV is calculated in accordance with AHRI 550-590.

*Please don't use the steel material for the water piping.

*Please always make water circulate, or pull the circulation water out completely when not in use.

*Please do not use groundwater or well water directly.

*The water circuit must be closed circuit.

*Due to continuous improvement, the above specifications may be subject to change without notice.


*This model is not equipped with a pump.

Operating limits

COOLING ONLY

Operable in cooling mode at an intake air temperature of up to 52°C.



The use of the flat tube heat exchanger has made it possible to increase the maximum intake air temperature from 43°C to 52°C in cooling mode, extending the cooling performance of the units in intense heat and in collective installation.

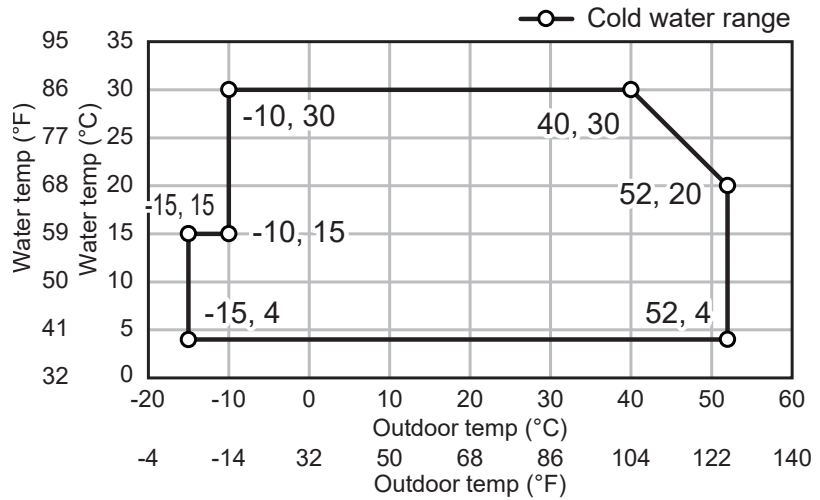

REVERSIBLE HEAT PUMP

Operable in heating mode at an intake air temperature of down to -20°C.

The new model has a greater heating capacity range due to the flat tube heat exchanger and the suction chamber injection mechanism of the compressor. It is operable at the minimum intake air temperature of -20°C and the minimum outlet water temperature of 25°C. The new model is suitable for use in manufacturing lines requiring heating throughout the year.

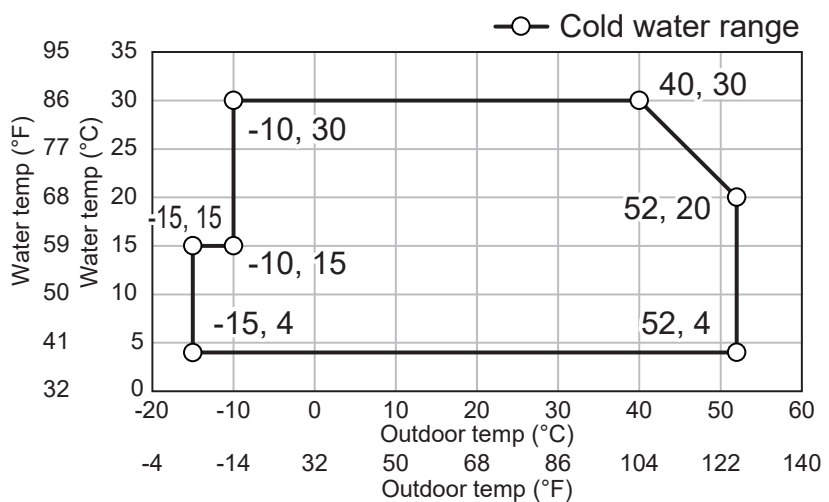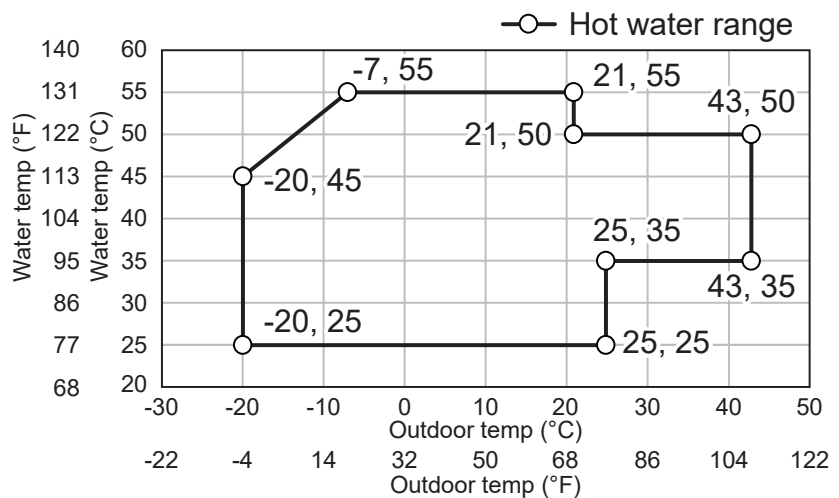

R32 refrigerant properties

Under the conditions shown below, there is a possibility that R32 could burn.

	R32	R410	R22
Chemical formula	CH ₂ F ₂	CH ₂ F ₂ /CHF ₂ CF ₃	CHClF ₂
Composition (blend ratio wt. %)	Single composition	R32/R125 (50/50 wt %)	Single composition
Ozone depletion potential (ODP)	0	0	0.055
Global warming potential (GWP) *1	675	2088	1810
LFL(vol.%) *2	13.3	-	-
UFL(vol.%) *3	29.3	-	-
Flammability *4	Lower flammability (2L)	No flame propagation (1)	No flame propagation (1)


*1 IPCC 4th assessment report

*2 LFL: Lower flammable limit

*3 UFL: Upper flammable limit

*4 ISO 817:2014

*5 R32 consistency is higher than LFL*2 and lower than UFL*3.

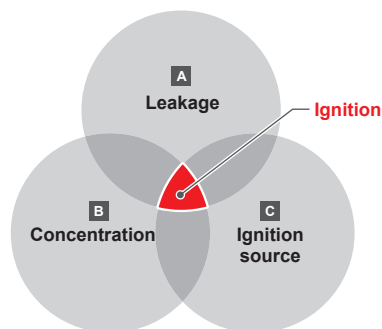

A Do not leak refrigerant.

<Installation>

- Vacuum drying should be done.
- Do not release refrigerant into the atmosphere unnecessarily.
- Follow "Installation points of charging refrigerant."

<Repair/Removal>

- Refrigerant should be recovered.

B Prevent concentration.

- Follow "Installation restrictions".

C Keep ignition sources away from the unit.

- Do not braze pipes that contain refrigerant. Before brazing, refrigerant should be recovered.
- Do not install the unit while electricity is on. Turn off electricity and check using a tester.
- Do not smoke during work and transportation.

Note: Both R32 / R410A emit toxic gas when exposed to naked flame.

TOOLS	Gauge manifold	Charge hose	Electronic weight scales	Charge valve	Electric leak tester (Gas leak detector)	Vacuum pump	Vacuum pump adapter	Refrigerant recovery equipment	Refrigerant recovery cylinder
R32	Shareable *3	Shareable *3	Shareable *3	Shareable *3	Shareable *3	Shareable *3	Shareable *3	Shareable *3	EXCLUSIVE
R410	Shareable *3	Shareable *3	Shareable *3	Shareable *3	Shareable *3	Shareable *3	Shareable *3	Shareable *3	EXCLUSIVE


NOTE: Be sure to confirm with the manufacturers that the electric leak tester, vacuum pump and refrigerant recovery equipment are compliant with R32.

*1 Refer to catalogs provided by the manufacturers of the tools above to ensure that the tools are usable with R32.

*2 Do not use R32 and R410A in combination in the same refrigerant recovery cylinder.

*3 The types of tools required for R32 units and R410A units are the same. Each tool must be used only with either R32 units or R410A units.

PROCEDURE FOR CHARGING REFRIGERANT

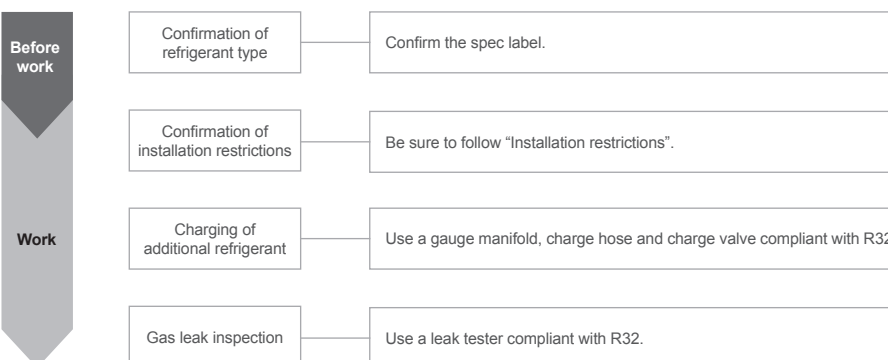

Installation restrictions

Do not install the unit where combustible gas may leak
- If combustible gas accumulates around the unit, fire or explosion may result.

- Provide sufficient space around the unit for effective operation, efficient air movement, and ease of access for maintenance.
- All restrictions mentioned in this manual apply not only to new installations but also to relocations and layout changes.
- Refer to the Installation manual for other precautions on installation



Installation space requirement

- Do not install the unit inside a building such as the basement or machine room, where the refrigerant may stagnate.
- Install the unit in a place where at least one of four sides is open.


CORRECT INSTALLATION

If the unit needs to be installed in a space where all four sides are blocked, confirm that one of the following situations (A or B) is satisfied.


A Install the unit in a space with a wall height of ≤ 0.125 m.

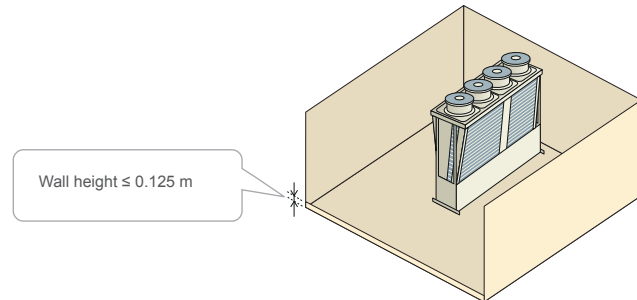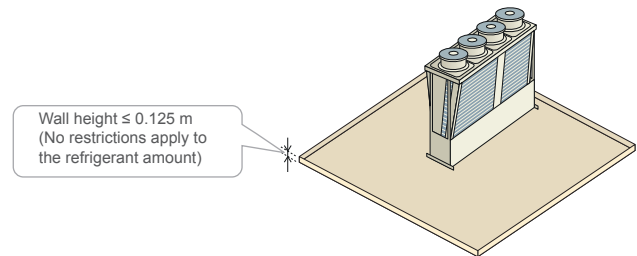


B Create an appropriate ventilation opening.

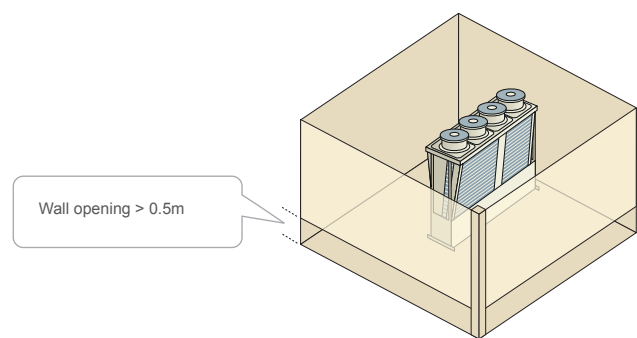

CORRECT INSTALLATION

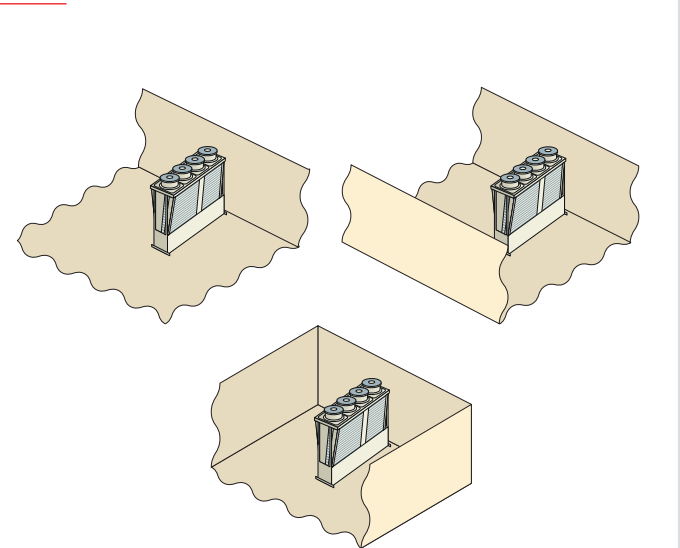


INCORRECT INSTALLATION

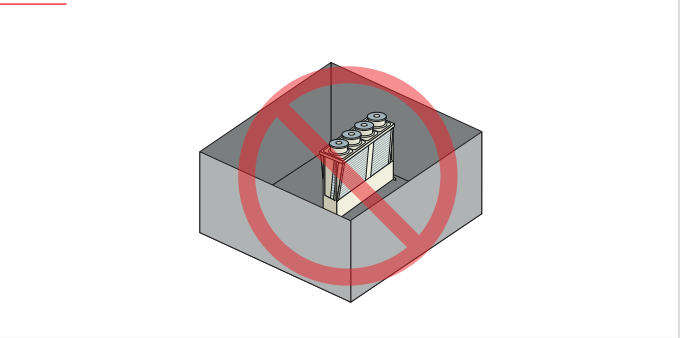

Regulatory requirements for safety

See below for information on installing a safety device on the air cooled chilling unit system

- * Safety devices shall be regularly inspected, maintained, and replaced in accordance with relevant laws, regulations, and the instructions of the manufacturers.
- * The requirements listed below were established based on IEC60 335-2-40 (Edition 5.0) G.G.6. See the original standards for further information on selecting a safety device.

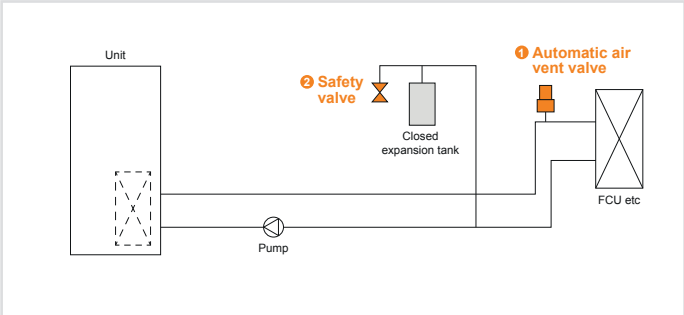

Required items	Note
Automatic air vent valve	* In the event of a failure of the waterside heat exchanger in the unit, the refrigerant may leak from the automatic air vent valve, so install it in a place where the refrigerant will not accumulate, such as outdoors.
Safety valve	* In the event of a failure of the waterside heat exchanger in the unit, the refrigerant may leak from the safety valve, so install it in a place where the refrigerant will not accumulate, such as outdoors.

IT Cooling

s-MEXT split system

s-MEXT split System		342
s-MEXT G00 System	NEW	348
s-MEXT G00 Indoor Unit	NEW	350
Mr. SLIM Outdoor Unit	NEW	352

MULTIDENSITY modular system

MULTIDENSITY	NEW	354
m-MOCU	NEW	358
m-MROW / m-MRAC	NEW	362





s-MEXT split system

Close Control Unit for IT Cooling applications.
Direct expansion system, full inverter for Edge Data Center.



Edge computing: the new trend for cloud decentralization

A new concept that places it self side by side to cloud computing is appearing on the market, thanks to the unstoppable digital transformation we are experiencing. It's the Edge computing.

In 2018, into the top ten strategic technological trends for companies and organizations, Gartner, a leading company in research and consulting, reported the "Cloud to the Edge" trend in fifth position.


This technology imposes the cloud decentralization, which translate into a new reference model for designing data centers. Concepts like IoT, 5G will inevitably lead a resources fragmentation in data centers

management. In fact, we speak of granularity, investments in smaller and widespread data centers, developed to respond to the growing demand for web connections with low latency and high performances.

As result, data processing times will have to be faster, and the only way to comply with both the connections' growing number and consumers' needs in terms of performances will have to be, according to the experts, to data processing closer to the users themselves.

Then we start to talk about Edge Data Centers, little data centers or server rooms, scattered on territory and used to host cloud services and local data processing.



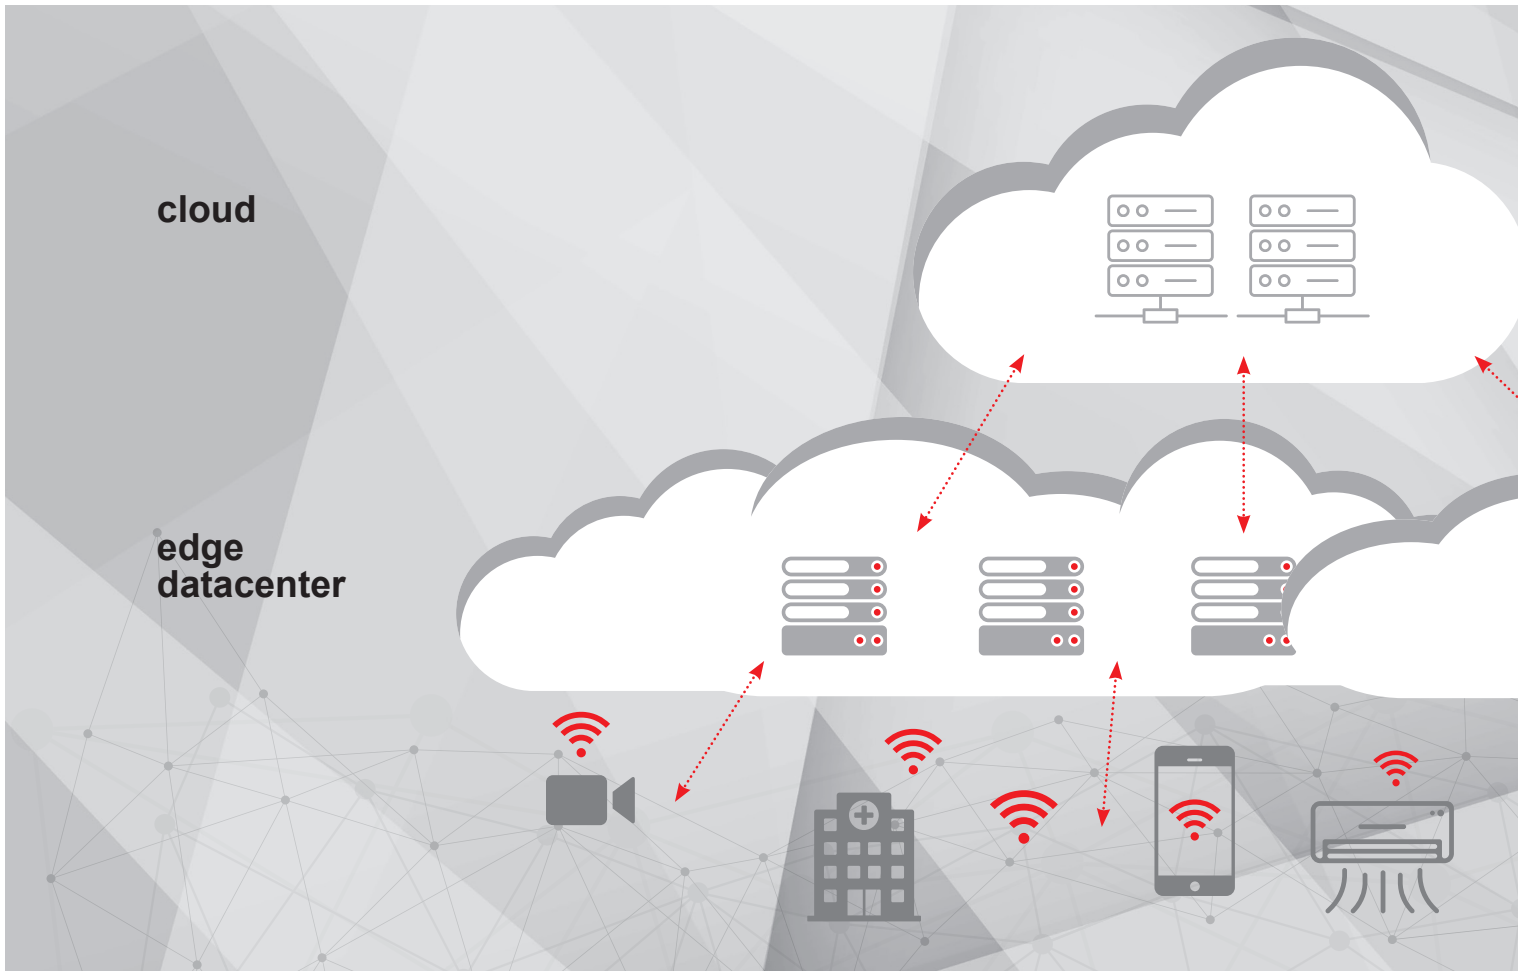



Cloud Computing

Traditional cloud model

The traditional model is facing some latency problems, limited bandwidth, dependability that cause traffic congestions, not suitable for future IoT implementations.

Advantages: large data processing capacity for complex analysis.

Products and applications: chillers, precision conditioners, infrastructures, control systems and accessories with RC brand.



Edge Computing

Distributed intelligence model

Edge computing, by distributing intelligence, will bring down the reduction of the amount of datas to be processed, prioritizing management of critical datas, latency sensitive, next to the users, filtering and passing to the cloud less impacting datas. It will manage big data processing.

Advantages: low latency, high elaboration performances with less investments in infrastructures.

Products and applications: precision air conditioners, infrastructures, control systems and accesories branded Mitsubishi Electric an RC.







s-MEXT G00 system

NEW

R410A

R32

HIGH EFFICIENCY LEVEL,
REDUCED OCCUPATION



Under



Over

S-MEXT COMBINES MORE THAN
50 YEARS OF EXPERIENCE OF
RC BRAND IN THE IT COOLING
MARKET, WITH THE MITSUBISHI
ELECTRIC EXCELLENCE QUALITY.

S-MEXT AND MR. SLIM
PERFECT SYNERGY



MITSUBISHI ELECTRIC QUALITY
READY TO SERVE YOUR EDGE
DATA CENTER



Mitsubishi Electric present s-MEXT, developed with the RC experience and notoriety in the IT Cooling market: the brand new combined system that combines all the experience of a specialized brand in precision air conditioning with the technological excellence and reliability of Mitsubishi Electric.

The innovative system dedicated to Edge Data Center combines a precision air conditioner (indoor unit) with the commercial outdoor unit of Mr.Slim series.

Best kW/m² Ratio

Thanks to the innovative system, s-MEXT guarantees high level performances while occupying very small floor space. It's compact layout allows to easily integrate the unit in existing data centers, without sacrificing any kW per square meter.




Efficiency beyond expectations

A data center's air conditioning system accounts for over 40% of total data center energy consumption. An efficient approach to air conditioning can generate an enormous advantage in efficiency and reduction of operating costs.

s-MEXT system is characterized by high quality components and control logics aimed at managing the system in the most efficiency mode.

- DC inverter scroll for linear and continuous modulation of cooling capacity based on the load.
- DC fans for best modulation of the air flow.

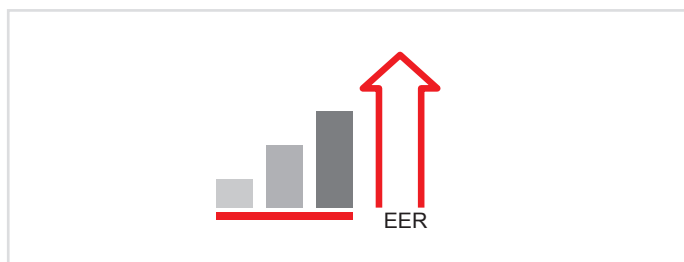


Flexibility in the air flows' choice

Flexible installation of the unit, thanks to the possibility of choosing between two air requirements: Under and Over.

Beyond the traditional Operational limits


The continuous increase of the thermal load in the IT environments has led to an increasing temperature inside the server rooms (up to 27°C) s-MEXT system has been developed to operate with return air temperature up to 35°C.

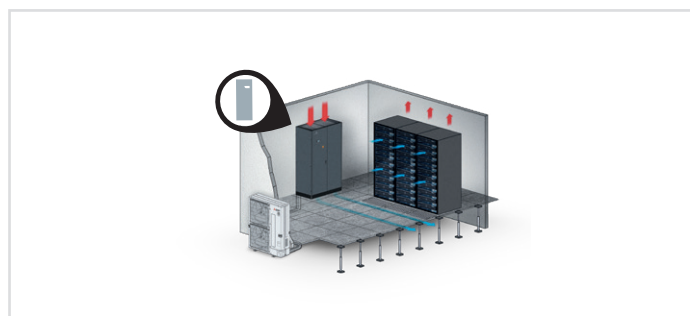

UNDER

With air delivery down, and air intake on the top.


Ideal for environments with raised floor.



OVER

With air delivery from the top and front air intake.

Ideal for environments with standard floors.



s-MEXT G00 Indoor Unit

NEW

R410A

R32

PRECISION CONDITIONER
(INDOOR UNIT)

ABLE TO MANAGE TEMPERATURE
AND HUMIDITY VARIABLES, WITH
EXTREME PRECISION, EVEN IN
THE EVENTS OF LARGE LOADS
VARIATIONS

DESIGNED TO PERFECT COMBINE
EFFICIENCY AND RELIABILITY IN
ALL OPERATING CONDITIONS,
THESE INDOOR UNIT USES ONLY
CERTIFIED AND HIGH QUALITY
COMPONENTS: EC FAN, DX COIL
WITH HYDROLYSIS TREATMENT
AND ADVANCED CONTROL
SYSTEM.

A WIDE RANGE OF ACCESORIES
COMPLETES THE SERIE AND
MAKES S-MEXT SUITABLE
FOR THE MOST CRITICAL
ENVIRONMENTAL'S CONDITIONS



Quick and easy installation

The construction features and the unit layout have been designed to ensure quick installation and facilitate front access for easy maintenance activity.

New EC inverter fan

High performance EC fan ensures a perfect modulation of air flow for partial loads. Made of ultra-light polymeric material, this fan is distinguished by:

- Sound level reduction by 4-5 dB(A);
- Reduction of 25% of power consumption, compared to traditional solutions.

Advanced Control System

Control System is the heart of the unit. Designed for monitoring and to operate the functional and environmental single unit's parameters. The Control System allows:

- Automatic reset after power failures;
- Serial interconnection with most modern BMS systems;
- up to 100 events recording;
- "Non-volatile" data storage for saving files;

Via simple and intuitive graphic display.



Technical specifications

MODEL			006	009	013	022	038	044
	Outdoor unit	n°	1	1	1	1	2	2
	Model	PUHZ-ZRP	60 VHA2	100 VKA3	125 YKA3	250 YKA3	200 YKA3	250 YKA3
Cooling (1)		PUHZ-ZM	60 VHA	100 VKA	125 YKA	250 YKA	200 YKA	250 YKA
	Cooling capacity	kW	6,79	10,1	11,9	22,5	38,8	42,4
	Sensible	kW	6,28	9,0	10,3	19,5	34,0	37,5
	SHR (%)		0,92	0,89	0,87	0,87	0,88	0,88
	System EER (nominal) 27°C - 47% RH		3,92	3,98	2,97	2,87	3,15	2,59
	SUPPLY FAN	n°	1	1	1	2	1	1
	Air flow	m³/h	2000	2500	2800	5000	8800	10000
	Nominal external static pressure	Pa	20	20	20	20	20	20
	Maximum external static pressure	Pa	200	25	45	25	125	25
	Power input (2)	kW	0,21	0,37	0,52	0,74	1,43	2,10
Electrical panel	Absorbed current (3)	A	0,93	1,64	3,23	3,28	2,20	3,22
	Starting current	A	0,5	0,5	0,5	0,5	0,5	0,5
Sound level (ISO 3744) (4)	Plate current	A	2,3	2,3	3,15	4,6	4,2	4,2
	Power input	kW	0,14	0,14	0,14	0,14	0,14	0,14
	Pressure level	dB(A)	53	57	61	60	63	67
	Power level	dB(A)	69	73	77	76	79	83
	AIR FILTERS	n°	1	1	1	2	4	4
	Extended filtering surface	m²	0,68	0,68	0,68	1,05	1,76	1,76
	Efficiency (ISO EN 16890)	COARSE	60%	60%	60%	60%	60%	60%
Dimensions	REFRIGERANT CIRCUITS	n°	1	1	1	1	2	2
	POWER SUPPLY	V/Ph/Hz	230/1/50	230/1/50	230/1/50	230/1/50	400/3+N/50	400/3+N/50
	Length	mm	600	600	600	1000	1000	1000
	Depth	mm	500	500	500	500	890	890
	Height	mm	1980	1980	1980	1980	1980	1980
Connections	NET WEIGHT Over	kg	103	115	115	185	297	297
	NET WEIGHT Under	kg	103	115	115	185	297	297
	Refrigerant pipes: Gas - Liquid	Ø Inch	5/8" - 3/8"	5/8" - 3/8"	5/8" - 3/8"	1" - 1/2"	1" - 3/8"	1" - 1/2"
	Condensate (5)	Ø mm	19	19	19	19	19	19
	Power supply wiring cable (6)	n° x mm²	3G1.5	3G1.5	3G1.5	3G1.5	4G1.5	4G1.5

Notes:

THE COOLING CAPACITY DOES NOT CONSIDER THE SUPPLY FAN MOTOR THERMAL LOAD

(1) Gross value. Characteristics referred to entering air at 27°C-47% RH; Ambient temperature 35°C; ESP=20Pa; Connection pipes length 5m;

(2) SHR= Sensible cooling capacity / Total cooling capacity.

(3) Corresponding to the nominal ESP=20Pa.

(4) Sound pressure level on air return at 1m.

(5) Rubber pipe-referred to internal diameter.

(6) Minimum section.

These units contain <HFC R410A [GWP₁₀₀ 2088]> fluorinated greenhouse gas.

These units contain <HFC R32 [GWP₁₀₀ 675]> fluorinated greenhouse gas.

Mr. SLIM

OUTDOOR UNIT

NEW

OUTDOOR UNIT EQUIPPED
WITH DC SCROLL INVERTER
COMPRESSOR AND AXIAL FANS
WITH DC ELECTRIC MOTOR

THE HEAT EXCHANGER IS THUS
EXPLOITED ENTIRELY IN ITS
EXCHANGE SURFACE.



OUTDOOR UNIT THAT BENEFIT
FROM SCROLL COMPRESSOR,
IS ALSO EQUIPPED WITH
A DEVICE CALLED "POWER
RECEIVER", A REFRIGERANT
ACCUMULATOR ACCOMPAINED
BY A PAIR OF LEV VALVES,
WITH THE DUAL FUNCTION
(SUBCOOLING/OVERHEATING THE
REFRIGERANT).

Technologies and Functions

Mr.Slim presents excellent performances in all loading conditions thanks to the sophisticated power inverter technology with advanced features:

- “Rotation and Backup” function for automatic switching on a second unit in case of first unit block.
- “Easy and fast maintenance” function and automatic monitoring of the refrigerant status.

Linear Expansion Valve (LEV)

The Mr.Slim linear expansion valve (LEV) allows precise regulation of the refrigerant flow, optimizing the compressor's performances.

- Fast achievement of system stability.
- Quick adaptation to load fluctuations.

Scroll Inverter compressor

Full inverter technology applied to the compressor allows continuous modulation of the cooling capacity according to the real needs of the servers.

In this way the rotation speed is continuously modulated helping to significantly increase the efficiency for partial loads.

- Elimination of inrush currents;
- Energy consumption reduction for 25%, compared to traditional ON/OFF technology;
- Maximum reliability thanks to continuous modulation without annoying ON/OFF cycles.



Technical specifications

OUTDOOR UNIT			PUHZ-ZM 60VHA	PUHZ-ZM 100VKA	PUHZ-ZM 125YKA	PUHZ-ZM 250YKA	PUHZ-ZM 200YKA	PUHZ-ZM 250YKA
	Indoor unit model		006	009	013	022	038	044
	Outdoor unit to be coupled to the indoor	n°	1	1	1	1	2	2
	COMPRESSOR	n°	1	1	1	1	1	1
	Power INPUT	kW	1,19	1,88	2,82	6,01	4,33	6,01
	Refrigerant charge	kg	2,8	4	4	7,7	7,1	7,7
	CONDENSER FAN	n°	1	2	2	2	2	2
	Air flow	m³/h	3300	6600	7200	8400	8400	8400
	Power input	kW	0,06	0,06	0,06	0,2	0,2	0,2
Dimensions	Length	mm	950	1050	1050	1050	1050	1050
	Depth	mm	355	370	370	370	370	370
	Height	mm	943	1338	1338	1338	1338	1338
	NET WEIGHT	kg	70	116	125	135	135	135

Notes:

(1) Characteristics referred to ambient temperature 35°C – indoor air condition 27°C-47% UR - Connection pipes length 5m;

(2) Sound pressure level on unit front at 1m.

(3) Minimum section.

(4) For standard refrigerant charge.

(5) With additional refrigerant charge.

(*) Data are referred to single outdoor unit.

(+) from 71 to 100 m please refer to Mr Slim O&M Manual.

These units contain <HFC R32 [GWP₁₀₀ 675]> fluorinated greenhouse gas.



MULTIDENSITY modular system

Efficient, rational, plug & play solution for high density data rooms.
Full inverter VRF system for small & medium size it environments
with hot spots up to 50 kW.




Up to 8 indoor units connected to one OUTDOOR unit

High density hot spots are managed by indoor units connected to condensing units working together as a unique system.




Highest capacity per footprint

Thanks to the possibility to minimise the number of outdoor units, the overall footprint of the whole system is drastically reduced.

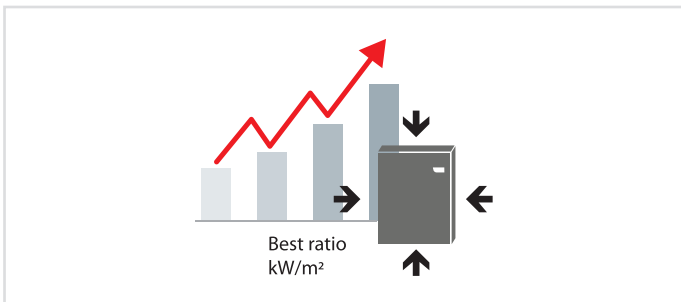

Choose your system's reliability

A multitude of configurations are available to provide customers with their desired level of reliability (configuration N, N+1, 2N). The Multidensity system is in line with TIER III and IV design topologies, based on the configuration chosen.

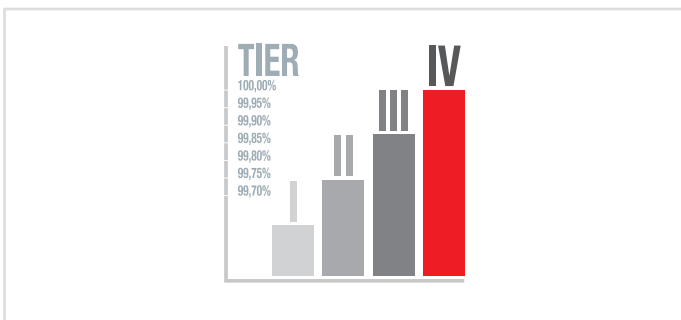


Adaptable flexibility

Match any kind of cooling requirement, from localised cooling to hot and cold aisle cooling management.

Rational design for optimised CAPEX

The rational design of the VRF system is combined with the experience and reliability of the Mitsubishi Electric brand, which guarantees the best quality for your IT infrastructure.

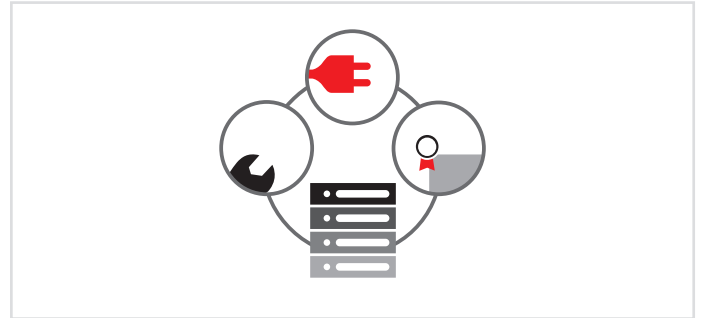

Plug and Play Installation

PLUG & PLAY SOLUTIONS No additional elements such as pumps, tanks, and valves are required. This installation simplicity results in a quicker start-up and more reliable maintenance, which are key factors for reducing installation and maintenance costs.

Active Redundancy

Active Redundancy Advanced load sharing logics of the Active Redundancy function ensure that the heat loads are balanced among the units (including those units that usually remain in stand-by) according to the actual requirements of the IT infrastructure, leveraging on the multi-unit configuration of redundant systems.

The modular approach of MULTIDENSITY SYSTEM


Indoor units are connected in master-slave configuration, if the master unit fails for any reason, the Dynamic Master logic automatically elects a new master from the other units.

Thanks to the flexible and modular approach of the MULTIDENSITY SYSTEM, it represents a tailored solution for any data center layout.

CONFIGURATION WITHOUT REDUNDANCY (N)

Ideal for small to medium IT rooms


- 1 external unit paired with up to 8 indoor units
- Average system EER is around 3.00
- Cooling capacity up to 50 kW

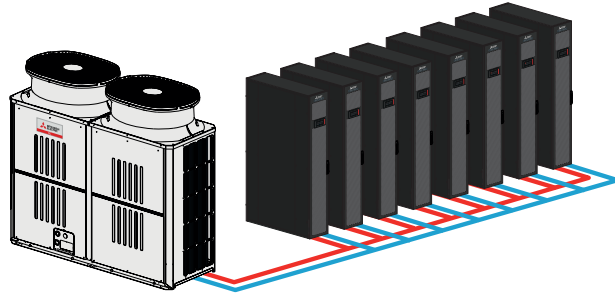

CONFIGURATION WITH REDUNDANCY (N+1)

Ideal for TIER II IT rooms

- 2 external units paired with up to 8 indoor units
- The external units operate in load sharing at partial loads for higher efficiency
- In case of failure of one of the condensing units, the second one operates at full load
- Average system EER is around 3.25
- Cooling capacity up to 50 kW

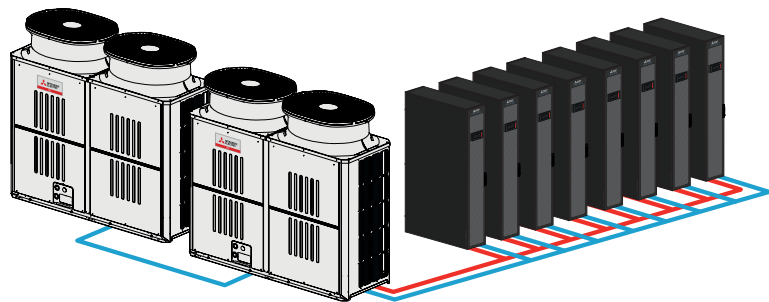


CONFIGURATION (2N)

Ideal for TIER III and TIER IV data centers

In accordance with the Uptime's Institute's classification, this configuration offers:

- A fully redundant and mirrored system with two independent distribution systems
- 1+1 external units paired with up to 8+8 indoor units

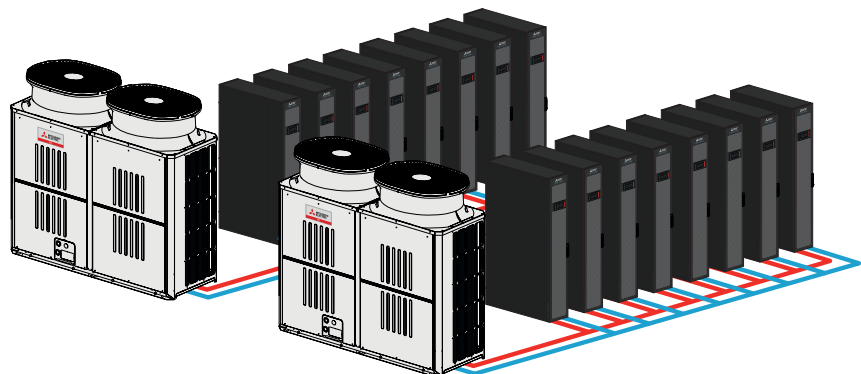

New evolution touch display


The evolution touch display is available for the room units m-MROW and m-MRAC.

Through simple, easy-to-read colour graphics, the innovative touch screen display (available as an option) shows the real performance of key components.

A completely redesigned interface improves the user experience.

The 7" touch screen display ensures the immediate visualization of the indoor units' status thanks to dedicated screens for main operating parameter control: temperature, humidity, ventilation and then, alarms and event management.

NEW EVOLUTION TOUCH DISPLAY



MULTILANGUAGE
WEB BASED ACCESS

INTUITIVE ICONS for better user experience

QUICK MENU ACCESS


REAL-TIME DISPLAY of main operating variables

KIPLink innovative interface

Multidensity system is also available, as option, with KIPLink interface.

Based on WI-FI technology, KIPLink gets rid of the standard keyboard and allows one to operate on the unit directly from a mobile devices (smartphone, tablet, notebook).

KIPLINK INNOVATIVE INTERFACE



KIPLINK
Keyboard to your Pocket

Dimensioning and design

Thanks to the sizing and design tool typical of Mitsubishi Electric direct expansion systems - New Design Tool – it's possible to simplify the design phases by minimizing the learning curve.

KIPLINK INNOVATIVE INTERFACE



Easier on-site operation

View and change all parameters with easy-to-understand screenshot and dedicated tooltips.
Get devoted "help" messages for alarm reset and trouble shooting.



Real-time graphs and trends

Monitor the immediate labour status of main components.
View the real-time graphs of the key operating variable trends.



Data logger function

View history of events and use the filter for a simple search.
Enhance diagnostics with data and graphs of 10 minutes before and after each alarm.
Download all the data for detailed analysis.

m-MOCU NEW

AIR-COOLED OUTDOOR UNIT FOR OUTDOOR INSTALLATION
TO BE COUPLED WITH IT COOLING INDOOR UNITS

mitsubishi electric's
experience in vrf
applied to it cooling
infrastructures

bell-mouth shape
designed propeller
fans with inverter
control brushless
dc motors

bl dc scroll compressors
with inverter technology to
produce the exact output
needed by the system

modular design and
reduced footprint
for any installation
requirement

increased performance

extreme reliability

suitable for long
refrigerant pipe distance

low noise operation



Technical specifications CONDENSING UNITS

Outdoor Unit			1x m-MOCU-G02-050	2x m-MOCU-G02-050
Cooling Capacity	Total ⁽¹⁾	kW	50	50
	System EER ⁽¹⁾	kW/kW	2.96	3.24
Unit Electrical Data	Power input ⁽¹⁾	kW	15.2	13.7
Compressor		Nr.	1	2x 1
	Power input ⁽¹⁾	kW	14.3	2x 14.3
Condenser Fans		Nr.	2	2x 2
	Total air flow	m ³ /h	19.200	2x 19.200
	Power input	kW	2x 0.92	4x 0.92
	External static pressure	Pa	0	0
Sound Level Iso 3744	Pressure level ⁽²⁾	dB(A)	65	68
Refrigerant Circuits		Nr.	1	2x 1
	Refrigerant type		R410A	R410A
	Pre-charged refrigerant	kg	11.8	2x 11.8
	F-GAS - CO ₂ equivalent	t	24.63	2x 24.63
Refrigerant Piping	Max pipe length (from the outdoor unit to the farthest indoor unit)	m	165	165
	Max height difference (outdoor unit higher than indoor units)	m	50	50
	Max height difference (outdoor unit lower than indoor units)	m	40	40
Power Supply		V/Ph/Hz	380-400-415 / 3+N / 50-60	380-400-415 / 3+N / 50-60
Dimensions	Length	mm	1750	2x 1750
	Depth	mm	740	2x 740
	Height	mm	1650	2x 1650
Net Weight		kg	304	2x 304

1. Gross Value. Characteristics referred to room air temperature 35°C with 27%RH and external ambient air temperature 35°C. ESP=20Pa.

2. Gross Value. Characteristics referred to room air temperature 46°C with 16%RH and external ambient air temperature 35°C. ESP=20Pa.

3. Sound pressure level on air return at 1m.

m-MROW m-MRAC

NEW

THESE INDOOR RACK COOLING UNITS, FROM 10 TO 28 KW,
ARE DESIGNED TO BE CLOSE-COUPLED TO BLADE SERVERS AND MANAGE HOT SPOTS

OPTIMIZED FOR MULTIDENSITY
SYSTEM


REDUCED SPACE OCCUPANCY
(UP TO 0,36 M²)

COOLING ONLY WHERE NEEDED


EC PLUG FANS FOR
REDUCING ENERGY
CONSUMPTION
AND NOISE LEVELS

ELECTRONIC EXPANSION
VALVE TO ACHIEVE
A MUCH WIDER
MODULATION CAPACITY

BOTH IN-ROW AND
ENCLOSURE
VERSIONS AVAILABLE



ENCLOSURE
IDEAL FOR REMOVING
HOT SPOTS IN STAND
ALONE SYSTEMS



IN ROW
IDEAL FOR HOT/COLD
AISLE CONFIGURATIONS

Technical specifications INDOOR UNITS

Indoor unit			m-MROW-G02-009 m-MRAC-G02-009	m-MROW-G02-015 m-MRAC-G02-015	m-MROW-G02-025 m-MRAC-G02-025
Unit size			9	15	25
Cooling capacity m-MROW	Total (1)	kW	10.6	16.6	28.6
	Sensible (1)	kW	9.6	15.7	27.4
	SHR (1)		0.91	0.94	0.96
	Indoor unit EER (1)	kW/kW	58.9	50.3	32.5
Cooling capacity m-MROW	Total (2)	kW	10.9	22.9	32.8
	Sensible (2)	kW	10.9	22.9	32.8
	SHR (2)		1	1	1
	Indoor unit EER (2)	kW/kW	60.5	69.3	37.2
Supply fan		Nr.	2	4	5
	Air flow	m³/h	1500	2700	4200
	Power input	kW	0.18	0.34	0.85
	Nominal external static pressure	Pa	20	20	20
	Maximum external static pressure	Pa	60	60	60
Sound level ISO 3744	Pressure level (3)	dB(A)	63.5	64.5	70.5
	Power level	dB(A)	79.0	80.0	86.0
Air filters		Nr.	2	2	2
	Extended filtering surface	m²	0.35	0.35	0.35
	Efficiency (ISO EN 16890)	COARSE	40%	40%	40%
Refrigerant circuits		Nr.	1	1	1
	POWER SUPPLY	V/Ph/Hz	230/1/50-60	230/1/50-60	230/1/50-60
Dimensions	Width	mm	300	300	300
	Length	mm	1000 / 1200	1000 / 1200	1000 / 1200
	Height	mm	2085	2085	2085
Net weight	m-MROW	kg	175	190	193
	m-MRAC	kg	185	200	203



Centro Direzionale Colleoni
Viale Colleoni, 7 - Palazzo Sirio
20864 Agrate Brianza (MB)
tel. 039.60531 - fax 039.6053223
e-mail: clima@it.mee.com



The equipment described in this catalogue contain fluorinated gasses such as HFC-32 (GWP 675), HFC-410A (GWP 2088). Installation of those equipment must be executed by professional installer based on EU reg. 303/2008 and 517/2014

COMFORT & IT COOLING SYSTEMS
FULL PRODUCT CATALOGUE
E-2112250(17170) sostituisce E-2009250(16620)

Specifications are subject to change without notice



E-2112250



les.mitsubishielectric.it/en/products/